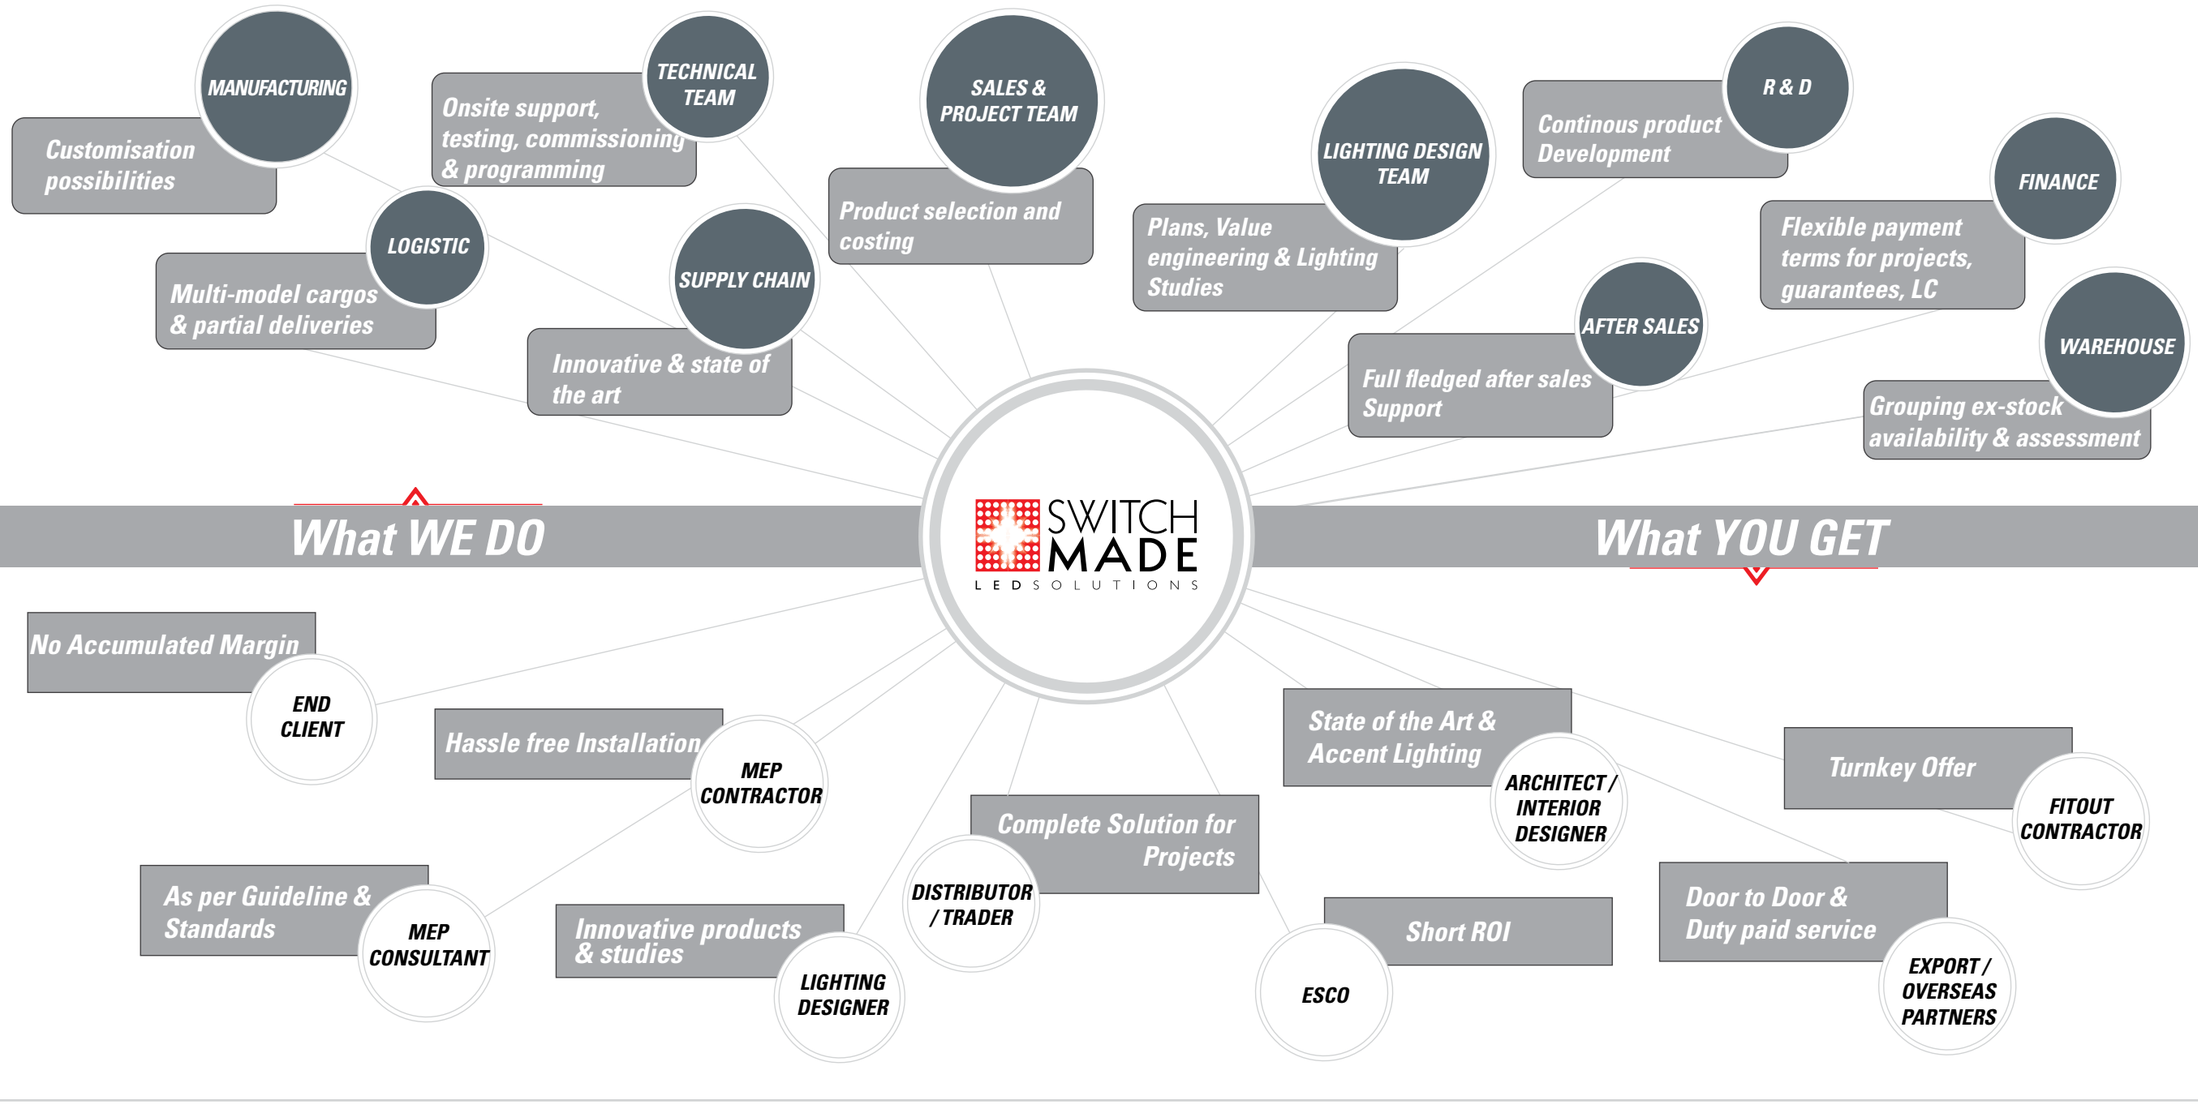


» LED GUIDE 2024


MANUFACTURING
Customisation possibilities
TECHNICAL TEAM
Onsite support, testing, commissioning & programming
SALES & PROJECT TEAM
Product selection and costing
LIGHTING DESIGN TEAM
Plans, Value engineering & Lighting Studies
R & D
Continous product Development
FINANCE
Flexible payment terms for projects, guarantees, LC
LOGISTIC
Multi-model cargos & partial deliveries
SUPPLY CHAIN
Innovative & state of the art
AFTER SALES
Full fledged after sales Support
WAREHOUSE
Grouping ex-stock availability & assessment
What WE DO
SWITCH MADE
LED SOLUTIONS
What YOU GET
No Accumulated Margin
END CLIENT
Hassle free Installation
MEP CONTRACTOR
As per Guideline & Standards
MEP CONSULTANT
Innovative products & studies
LIGHTING DESIGNER
DISTRIBUTOR / TRADER
Complete Solution for Projects
ESCO
Short ROI
State of the Art & Accent Lighting
ARCHITECT / INTERIOR DESIGNER
Turnkey Offer
FITOUT CONTRACTOR
Door to Door & Duty paid service
EXPORT / OVERSEAS PARTNERS

SWITCH MADE
LED SOLUTIONS

100 % LED LIGHTING

French manufacturer of LED lighting solutions; we design, develop and market a wide range of LED lighting solutions and services adapted to customer's needs.

We are 100% LED Lighting focused. Since the set-up of the company in the city of lights, Lyon – FRANCE, our range has been fully dedicated to LED technology. We believe in solutions that offers better energy efficiency, longer lifetime among plenty of others benefits.

SOLUTION & SERVICE ORIENTATION

SWITCH MADE designs unique, innovative and stylish LED lighting concepts.
We believe in delivering more than a lighting product.

We bring a global service to our customers from the lighting design and calculations, to the technical advice (in choosing the right product for the proper application), we help in determining the ROI benefits and we provide delivery assistance and installation support on site. Our team is here to assist at all stages of the projects including by helping our clients to lower their energy bills, to decrease maintenance costs and to reduce power consumption thus carbon foot print optimized.

FLEXIBILITY & SIMPLICITY

Our strong network all over the world and our know-how of the market enables us to adapt to each and every customer's needs. With one of the widest range of LED lighting products in the market, we are covering all types of applications and operate on all lighting segments: Indoor and Outdoor including Commercial, Leisure and Entertainment, Education, Healthcare, Retail, Hospitality sectors and more.

By communicating simply and providing a flexible approach to transportation, stock and product customization, we are customer driven and dedicated to fulfill their requests.

"At **SWITCH MADE**; we manage projects from A to Z.

WE are customer driven.
look for simple and global solutions.
base our decision on facts, not opinions.
deliver on commitments and we communicate simply and clearly.

These are the key principles on which we have been focused since our debuts.
They have made us more efficient, performant but most of all closer to our customers.
Our best feature is our global team of highly professional and knowledgeable individuals, who, through their hard work, passion and dedication continuously drive our company forward.

We have built long terms relationships with our partners and today we will continue to strive to do our upmost to constantly perfect our customer's experience."

Mr. Jeremy LOISEL

SWITCH MADE
LED SOLUTIONS

- OUTDOOR & FAÇADE
- COMMERCIAL | Malls | Offices | Public Transport | Residential | Industrial
- LEISURE & ENTERTAINMENT
- EDUCATION
- HEALTHCARE
- SHOP & MUSEUM
- HOTEL & GASTRONOMY

Explore our latest projects in our 2022 Success Stories...

DOWNLOAD

LED GUIDE 2023

SWITCH MADE LED SOLUTIONS

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM


INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING

www.switch-made.com



INTEGRATED DRIVER




EXTERNAL DRIVER



RECESSED



WARDROBE LIGHTING



STEP LIGHTING




IP67 PROFILES



LINEAR LIGHTING




COMPONENTS


- LINE S3360 
- LINE S4067 
- LINE S5470(F) 
- LINE S7977 
- LINE C25100 


LINE S3360

p.7

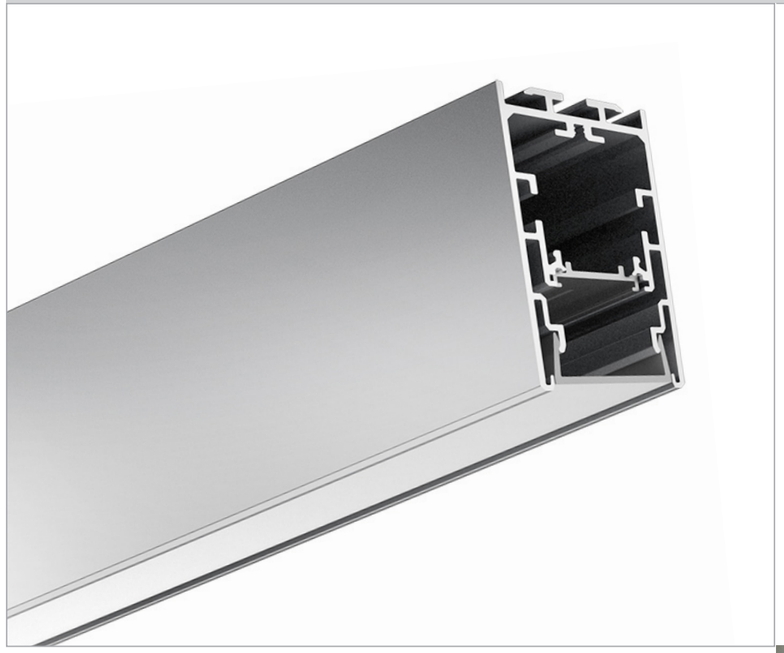

2700K 3000K 4000K 5000K 6000K





Length:
2507mm (Incl. endcap)
Refer datasheet for profile cutting calculation



Accessories Included


Alu. Profile/ Diffuser


End Caps x 2



Buckle x 4

(for 2500mm)

Optional


S3360-PY


S3360-RE


S3360-CL


S3360-WL


Standard Extenders



S3360-L90


S3360-L90N


S3360-L90W


S3360-T90


S3360-X90



Features

Similar Products » INTEGRATED DRIVER



S3360 S4067 S5470(F) S7977 C25100

20 W/m	IP33	24Vdc	280 LEDs/m
Lamp lumen/M @CRI 80 2705 lm/m	Luminaire lumen/M @CRI 80 2300 lm/m	14 LEDs/50mm Cutting Unit	

Photometric result of 1m 4000K luminaire


FLEX ROLL
FR8280-15


OR



LED PCB
PCB8280-17



LED DRIVER
60 W, 24Vdc

LINE S4067

p.8

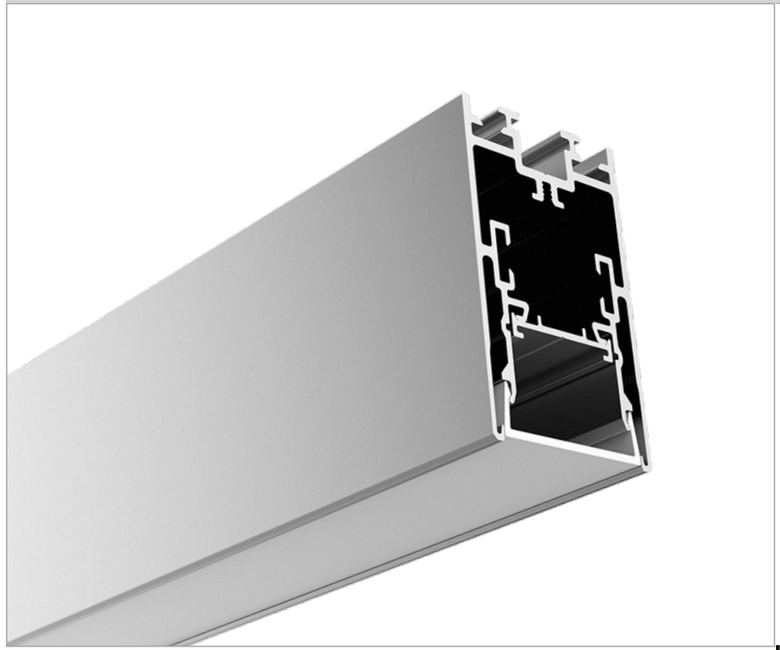





Length:
2507mm (Incl. endcap)
Refer datasheet for profile cutting calculation

2700K 3000K 4000K 5000K 6000K



Features



Similar Products » INTEGRATED DRIVER



S3360 S4067 S5470(F) S7977 C25100

Accessories Included


Alu. Profile


End Caps x 2

Diffuser



Buckle x 4

(for 2500mm)

Optional


S4067-PY


S4067-RE


S4067-CL


S4067-WL


S4067-CL


Standard Extenders


S4067-L90


S4067-L90N


S4067-L90W


S4067-T90



S4067-X90

20 W/m	IP33	24Vdc	280 LEDs/m
Lamp lumen/M @CRI 80 2705 lm/m	Luminaire lumen/M @CRI 80 2300 lm/m	14 LEDs/50mm Cutting Unit	

Photometric result of 1m 4000K luminaire



FLEX ROLL
FR8280-15


OR



LED PCB
PCB8280-17


LED DRIVER
60 W, 24Vdc

LINE S5470(F)

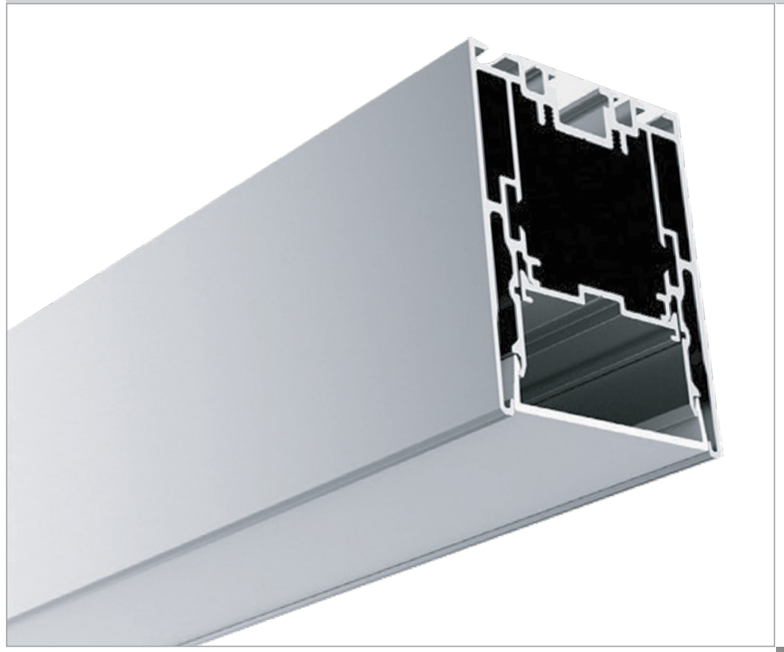






Length:
2507mm (Incl. endcap)
Refer datasheet for profile cutting calculation

2700K 3000K 4000K 5000K 6000K

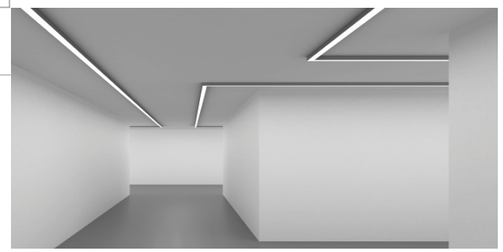



Features

Accessories Included


Alu. Profile/ Diffuser


End Caps x 2


Buckle x 4

(for 2500mm)

Optional


S5470-PY


S5470-RE


S5470-CL


S5470-WL


S5470-CL


Standard Extenders


S5470-L90


S5470-L90N


S5470-L90W


S5470-T90


S5470-X90


S5470-BKDF

Similar Products » INTEGRATED DRIVER


S3360 S4067 S5470(F) S7977 C25100


20 M/ROLL
FLEXIBLE DIFFUSER
(Optional)




25 W/m	IP33	24Vdc	280 LEDs/m
Lamp lumen/M @CRI 80 3254 lm/m	Luminaire lumen/M @CRI 80 2765 lm/m	14 LEDs/50mm Cutting Unit	

Photometric result of 1m 4000K luminaire


FLEX ROLL
FR8280-34


OR


LED PCB
PCB8280-36



LED DRIVER
100 W, 24Vdc

LINE S7977


p.10

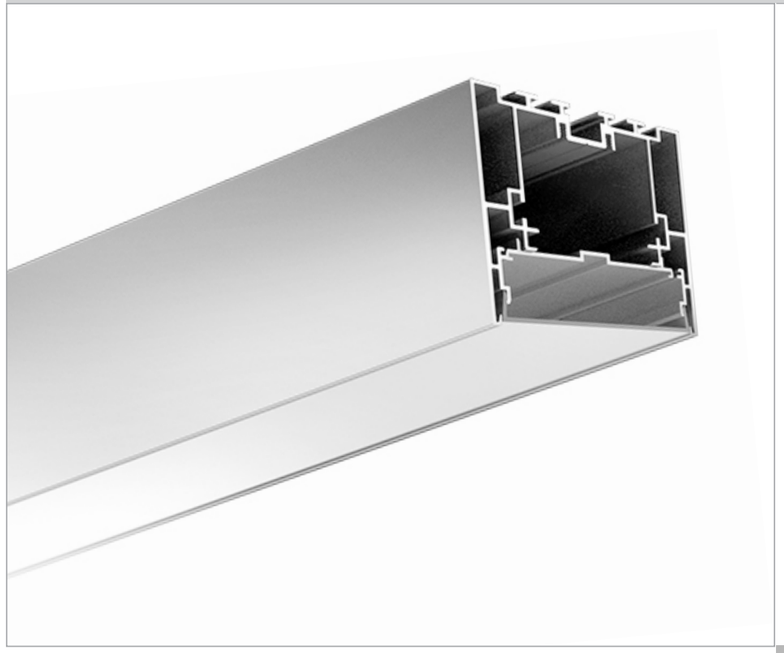


2700K 3000K 4000K 5000K 6000K



Features

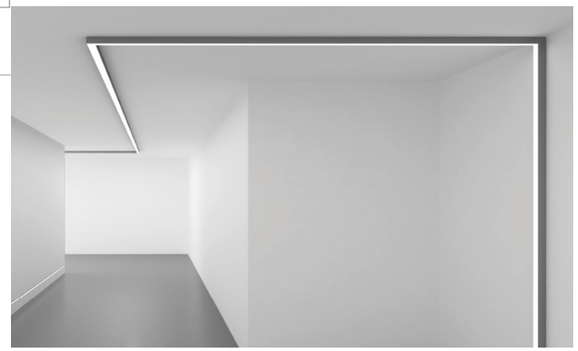



Length:
2507mm (Incl. endcap)
Refer datasheet for profile cutting calculation

Accessories Included


Alu. Profile/ Diffuser


End Caps x 2


Buckle x 4

(for 2500mm)

Optional


S7977-PY


S7977-RE


S7977-CL


S7977-L90


Standard Extenders


S7977-L90N


S7977-L90W


S7977-T90


S7977-X90


S7977-CL


30 W/m | IP33 | 24Vdc | 420 LEDs/m

Lamp lumen/M @CRI 80 3906 lm/m | Luminaire lumen/M @CRI 80 3320 lm/m | 21 LEDs/50mm Cutting Unit

Photometric result of 1m 4000K luminaire


FLEX ROLL
FR8420-59

OR


LED PCB
PCB8420-62



LED DRIVER
100 W, 24Vdc

Similar Products » INTEGRATED DRIVER



S3360 S4067 S5470(F) S7977 C25100

LINE C25100

p.11

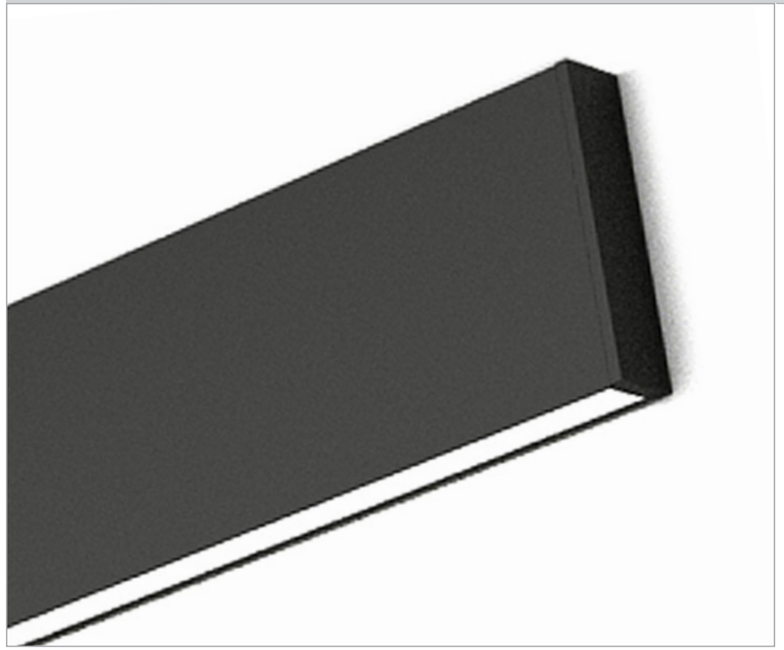

2700K 3000K 4000K 5000K 6000K



Length:
613/1213/1513/1813/2413mm (Incl. endcap)
Refer datasheet for profile cutting calculation

LENGTH	CRI	POWER	CCT	LUMENS/MODULE	CODE
600 mm	80	↑ 7 W ↓ 7 W	4000K	↑ 540 lm ↓ 540 lm	PRC25100-14W
1200 mm		↑ 14 W ↓ 14 W		↑ 1070 lm ↓ 1070 lm	PRC25100-28W
1500 mm		↑ 19 W ↓ 19 W		↑ 1340 lm ↓ 1340 lm	PRC25100-38W
1800 mm		↑ 23 W ↓ 23 W		↑ 1600 lm ↓ 1600 lm	PRC25100-46W
2400 mm		↑ 29 W ↓ 29 W		↑ 2140 lm ↓ 2140 lm	PRC25100-58W

Features



AC 220 V | Integrated Driver | CRI80/90

Similar Products » INTEGRATED DRIVER



S3360 S4067 S5470(F) S7977 C25100

LED GUIDE 2023

SWITCH MADE LED SOLUTIONS

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM


INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING

www.switch-made.com



INTEGRATED DRIVER




EXTERNAL DRIVER



RECESSED



WARDROBE LIGHTING



STEP LIGHTING




IP67 PROFILES



LINEAR LIGHTING




COMPONENTS


- LINE S0709 
- LINE S1607 
- LINE S1613 
- LINE S1911K 
- LINE S3535 
- LINE G1616C 
- LINE G3030C 
- LINE T60 

LINE S0709

p.13

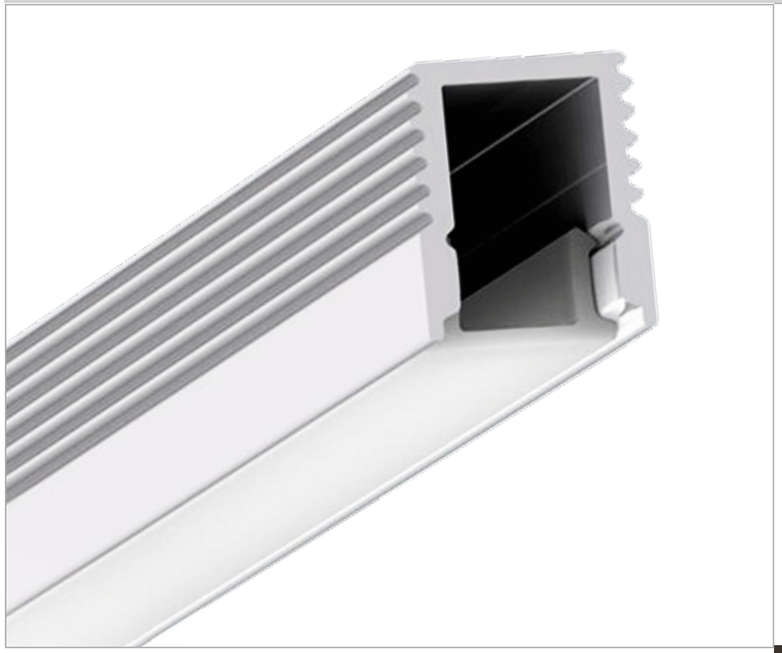


2700K 3000K 4000K 6000K



Length:
2504mm (Incl. endcap)
Refer datasheet for profile cutting calculation



Accessories Included


Alu. Profile/
Diffuser


End Caps x 2

(for 2500mm)

Optional


Mounting
Bracket x 4


6.6 W/m	IP33	24Vdc	140 LEDs/m
Lamp lumen/M @CRI 90 590 lm/m	Luminaire lumen/M @CRI 90 500 lm/m	7 LEDs/50mm Cutting Unit	

Photometric result of 1m 4000K luminaire



LED STRIP
6.6 W/m, 4mm, 24Vdc


LED DRIVER
30 W, 24Vdc

Features




Similar Products » EXTERNAL DRIVER



S0709 S1607 S1613 S1911K S3535 G1616C G3030C T60

LINE S1607

p.14

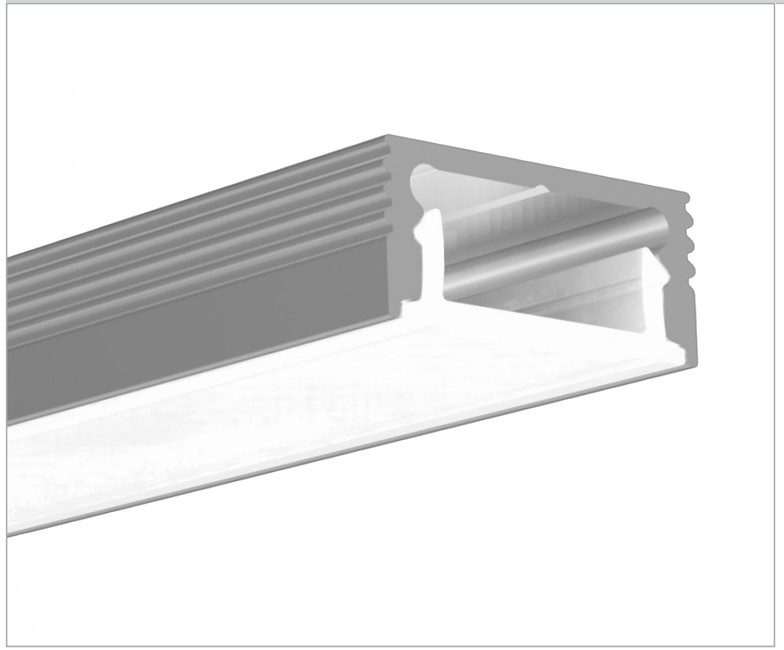






Length:
2504mm (Incl. endcap)
Refer datasheet for profile cutting calculation

Accessories Included



Alu. Profile/
Diffuser




End Caps x 2

(for 2500mm)

Optional



180° Adj.Mounting
CP06-AD



End Cap With Hole
S1607-ECS-H




CP-21 90°Adj.
Mounting Clip




Mounting
Bracket x 4

2700K 3000K 4000K 6000K





Features



Adjustable Brackets
(Optional)

15 W/m	IP33	24Vdc	280 LEDs/m
Lamp lumen/M @CRI 90 1266 lm/m	Luminaire lumen/M @CRI 90 1076 lm/m	7 LEDs/25mm Cutting Unit	

Photometric result of 1m 4000K luminaire




LED STRIP
15 W/m, 8mm, 24Vdc



LED DRIVER
60 W, 24Vdc


Similar Products » EXTERNAL DRIVER



S0709 S1607 S1613 S1911K S3535 G1616C G3030C T60


LINE S1613

p.15

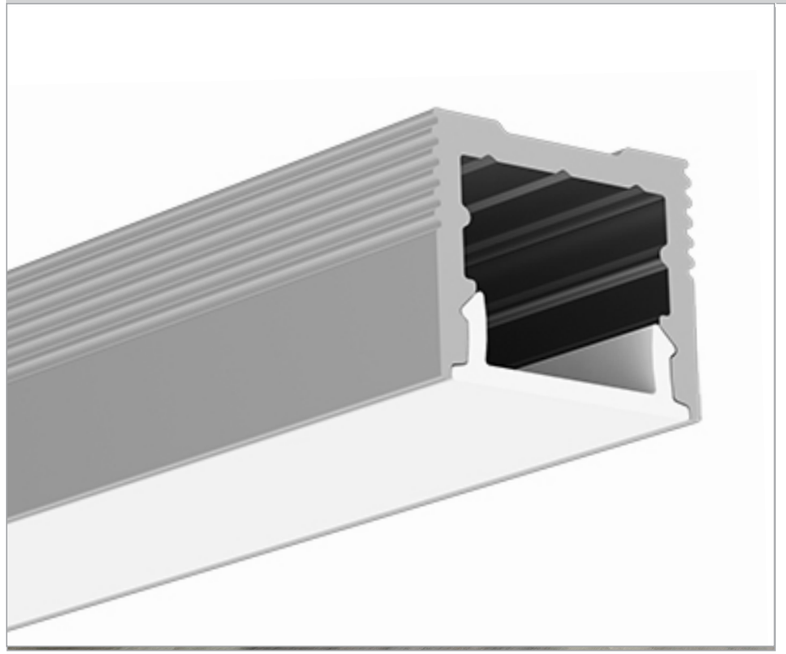


2700K 3000K 4000K 6000K





Length:
2504mm (Incl. endcap)
Refer datasheet for profile cutting calculation

Accessories Included



Alu. Profile/
Diffuser



End Caps x 2

(for 2500mm)


Optional



45° Mounting Clip
CP05-45



180° Adj.Mounting
CP06-AD



End Cap With Hole
S1613(B)-ECS-H




CP-21 90°Adj.
Mounting Clip




Mounting
Bracket x 4





Adjustable Brackets
(Optional)

Features





6.6 W/m	IP33	24Vdc	140 LEDs/m
Lamp lumen/M @CRI 90 590 lm/m	Luminaire lumen/M @CRI 90 500 lm/m	7 LEDs/50mm Cutting Unit	

Photometric result of 1m 4000K luminaire




LED STRIP
6.6 W/m, 8mm, 24Vdc



LED DRIVER
30 W, 24Vdc


Similar Products » EXTERNAL DRIVER




S0709 S1607 S1613 S1911K S3535 G1616C G3030C T60

LINE S1911K

p.16

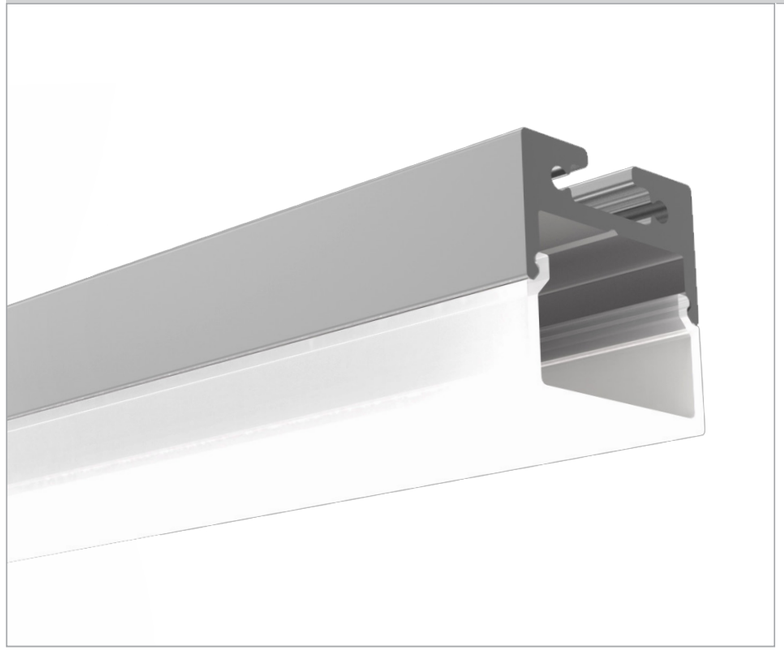






Length:
2504mm (Incl. endcap)
Refer datasheet for profile cutting calculation

2700K 3000K 4000K 6000K

Features





LINE S1911C

Diffuser (Optional)

Accessories Included



Alu. Profile/
Diffuser



End Caps x 2

(for 2500mm)


Optional



S1911K-PY



180° Extender



End Cap With Hole
S1911K(B)-ECS-H



Mounting
Bracket x 4



Standard
Extenders

15 W/m	IP33	24Vdc	280 LEDs/m
Lamp lumen/M @CRI 90 1510 lm/m	Luminaire lumen/M @CRI 90 1284 lm/m	14 LEDs/50mm Cutting Unit	

Photometric result of 1m 4000K luminaire




LED STRIP
15 W/m, 10mm, 24Vdc



LED DRIVER
60 W, 24Vdc


Similar Products » EXTERNAL DRIVER



S0709 S1607 S1613 S1911K S3535 G1616C G3030C T60

LINE S3535

p.17

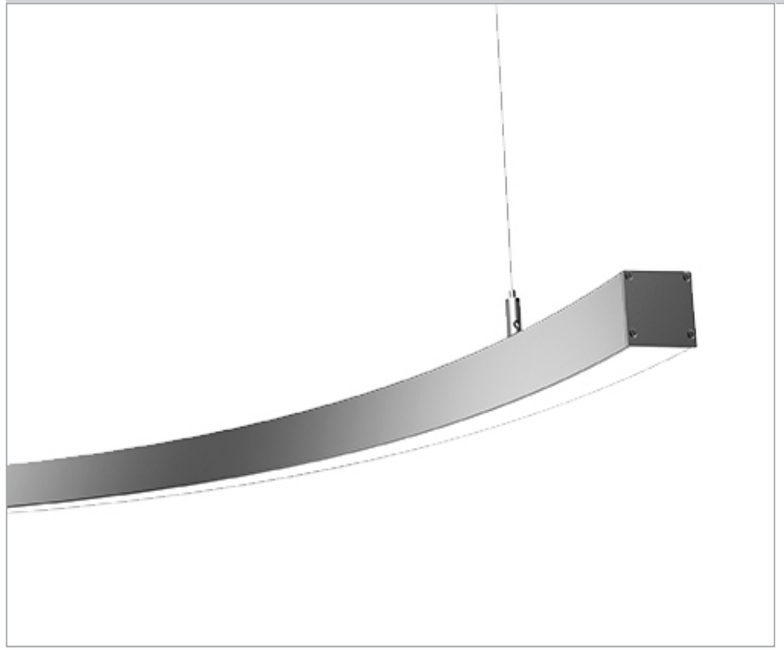


2700K 3000K 4000K 5000K 6000K




Features





Length: 2503mm (Incl. endcap)
Refer datasheet for profile cutting calulation

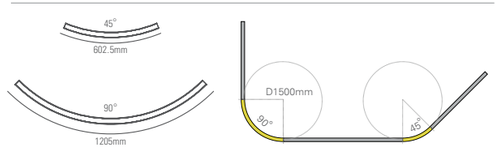

Bending (Optional)

Accessories Included



Alu. Profile/ Diffuser



End Caps x 2

(for 2500mm)



Optional




S3535-PN



180° Extender



Arc Extender



Flexible Diffuser

20 W/m	IP33	24Vdc	160 LEDs/m
Lamp lumen/M @CRI 90 2494 lm/m	Luminaire lumen/M @CRI 90 2120 lm/m	8 LEDs/50mm Cutting Unit	

Photometric result of 1m 4000K luminaire




LED PCB
20 W/m, 20mm, 24Vdc



LED DRIVER
60 W, 24Vdc

Similar Products » EXTERNAL DRIVER




S0709 S1607 S1613 S1911K S3535 G1616C G3030C T60

LINE G1616C

p.18



2700K 3000K 4000K 6000K



Length:
2504mm (Incl. endcap)
Refer datasheet for profile cutting calculation

Accessories Included


Alu. Profile/ Diffuser


End Caps x 2

(for 2500mm)

Optional



End Cap With Hole
G1616C(B)-ECS-H



Mounting Clips x 4




Features

Similar Products » EXTERNAL DRIVER


S0709 S1607 S1613 S1911K S3535 G1616C G3030C T60


LINE G1616K
PRG1616K
OPTIONAL

6.6 W/m	IP33	24Vdc	140 LEDs/m
Lamp lumen/M @CRI 90 636 lm/m	Luminaire lumen/M @CRI 90 540 lm/m	7 LEDs/50mm Cutting Unit	


Photometric result of 1m 4000K luminaire


LED STRIP
6.6 W/m, 8mm, 24Vdc



LED DRIVER
30 W, 24Vdc

LINE G3030C

p.19

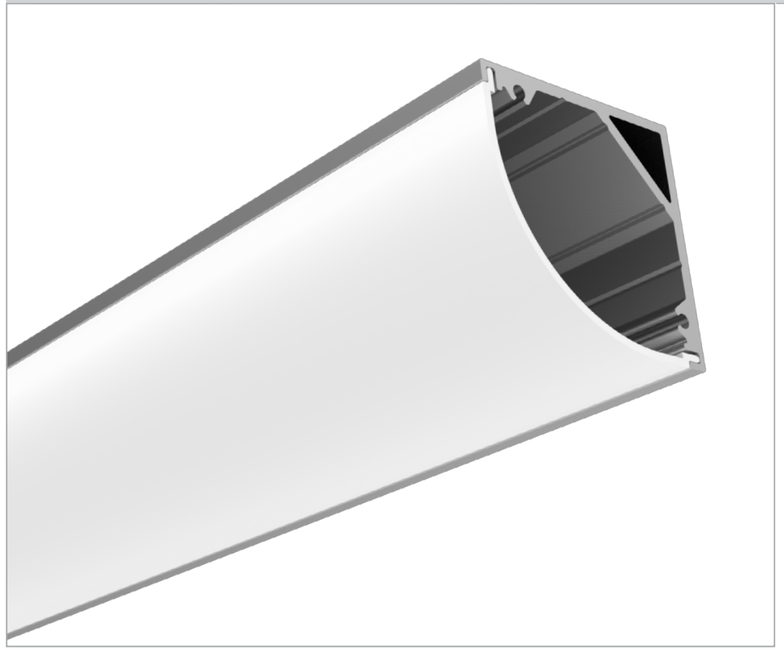

2700K 3000K 4000K 6000K



Length:
2504mm (Incl. endcap)
Refer datasheet for profile cutting calculation

Accessories Included


Alu. Profile/ Diffuser


End Caps x 2

(for 2500mm)

Optional



End Cap With Hole G3030C-ECS-H



Mounting Clips x 4

Features




Similar Products » EXTERNAL DRIVER


S0709 S1607 S1613 S1911K S3535 G1616C G3030C T60



LINE G3030K
LINE G3030K

OPTIONAL

15 W/m	IP33	24Vdc	280 LEDs/m
Lamp lumen/M @CRI 90 1510 lm/m	Luminaire lumen/M @CRI 90 1284 lm/m	14 LEDs/50mm Cutting Unit	


Photometric result of 1m 4000K luminaire



LED STRIP
15 W/m, 10mm, 24Vdc



LED DRIVER
60 W, 24Vdc

LINE T60

p.20

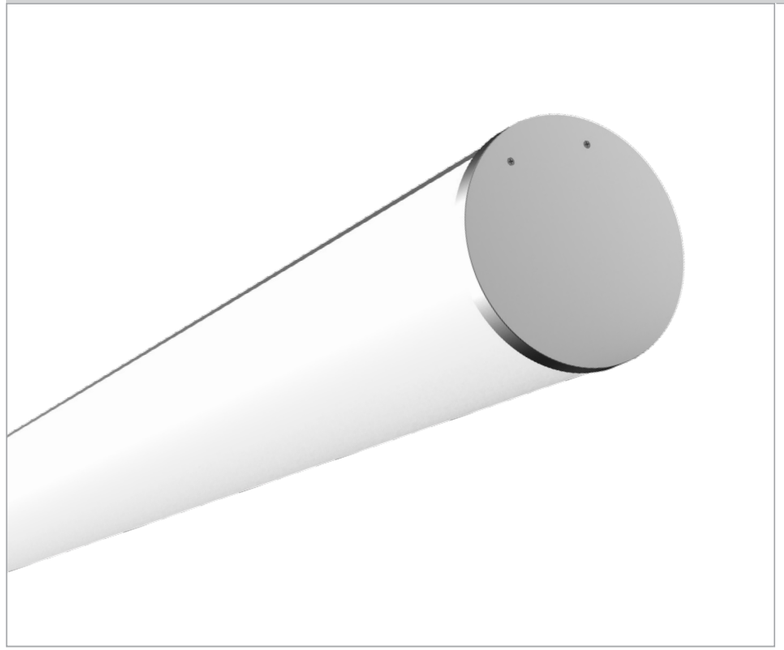





Length:
2504mm (Incl. endcap)
Refer datasheet for profile cutting calculation

2700K 3000K 4000K 5000K 6000K

Accessories Included


Alu. Profile / Diffuser


End Caps x 2

(for 2500mm)

Optional


T60-PY


180° Extender



Surface Mounted Clip

Features



T60

Similar Products » EXTERNAL DRIVER


S0709 S1607 S1613 S1911K S3535 G1616C G3030C T60

20 W/m	IP33	24Vdc	280 LEDs/m
Lamp lumen/M @CRI 80 2706 lm/m	Luminaire lumen/M @CRI 80 2300 lm/m	14 LEDs/50mm Cutting Unit	

Photometric result of 1m 4000K luminaire


FLEX ROLL


LED DRIVER
60 W, 24Vdc

LED GUIDE 2023

SWITCH MADE LED SOLUTIONS

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM


INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING

www.switch-made.com



INTEGRATED DRIVER




EXTERNAL DRIVER



RECESSED



WARDROBE LIGHTING



STEP LIGHTING





IP67 PROFILES



LINEAR LIGHTING



COMPONENTS

LINE E1212	
LINE E2507	
LINE E2513	
LINE E5535	
LINE E6935(F)	
LINE E9435	


LINE E1212

p.22



2700K 3000K 4000K 6000K






Length:
2504mm (Incl. endcap)
Refer datasheet for profile cutting calculation

W 9 x H 12 x L mm

Accessories Included


Alu. Profile/ Diffuser


End Caps X 2


(for 2500mm)

Optional


E1212-ECH



E1212-CP

Features





Similar Products » RECESSED


E1212 E2507 E2513 E5535 E6935(F) E9435

6.6 W/m	IP33	24Vdc	140 LEDs/m
Lamp lumen/M @CRI 90 590 lm/m	Luminaire lumen/M @CRI 90 500 lm/m	7 LEDs/50mm Cutting Unit	

Photometric result of 1m 4000K luminaire


LED STRIP
6.6 W/m, 4mm, 24Vdc


LED DRIVER
30 W, 24Vdc


LINE E2507

p.23



2700K 3000K 4000K 6000K






Length:
2504mm (Incl. endcap)
Refer datasheet for profile cutting calculation

W 18 x H 7 x L mm

Accessories Included


Alu. Profile/ Diffuser



End Caps X 2

(for 2500mm)

Optional


E2507-ECH

Features






15 W/m	IP33	24Vdc	280 LEDs/m
Lamp lumen/M @CRI 90 1266 lm/m	Luminaire lumen/M @CRI 90 1075 lm/m	14 LEDs/25mm Cutting Unit	

Photometric result of 1m 4000K luminaire


LED STRIP
15 W/m, 8mm, 24Vdc


LED DRIVER
60 W, 24Vdc

Similar Products » RECESSED


E1212 E2507 E2513 E5535 E6935(F) E9435


LINE E2513

p.24



2700K 3000K 4000K 6000K





Length:
2504mm (Incl. endcap)
Refer datasheet for profile cutting calculation

W 18 x H 13 x L mm


Accessories Included


Alu. Profile/
Diffuser


End Caps x 2


(for 2500mm)

Optional


End Cap With Hole
E2513-ECS-H



Recessed Clip
E2513-CP

Features





Similar Products » RECESSED


E1212 E2507 E2513 E5535 E6935(F) E9435

6.6 W/m	IP33	24Vdc	140 LEDs/m
Lamp lumen/M @CRI 90 590 lm/m	Luminaire lumen/M @CRI 90 500 lm/m	7 LEDs/50mm Cutting Unit	

Photometric result of 1m 4000K luminaire


LED STRIP
6.6 W/m, 8mm, 24Vdc


LED DRIVER
30 W, 24Vdc


LINE E5535

p.25



2700K 3000K 4000K 5000K 6000K





Length:
2520mm (Incl. endcap)
Refer datasheet for profile cutting calculation

W 46mm


Accessories Included



Alu. Profile/ Diffuser


End Caps X 2

(for 2500mm)

Optional



E5535-RN


E5535-RB



E5535-L90


Standard Extenders


E5535-L90N


E5535-L90W



E5535-T90


E5535-X90

Features








Photometric result of 1m 4000K luminaire



FLEX ROLL
FR8280-20

OR


LED PCB
PCB8280-23


LED DRIVER
60 W, 24Vdc

Similar Products » RECESSED


E1212 E2507 E2513 E5535 E6935(F) E9435


LINE E6935(F)

p.26



2700K 3000K 4000K 5000K 6000K






Length:
2520mm (Incl. endcap)
Refer datasheet for profile cutting calculation

W 60mm

Accessories Included


Alu. Profile/ Diffuser


End Caps x 2

(for 2500mm)

Optional


E6935-RN


E6935-RB


E6935-L90


Black Diffuser


Standard Extenders



E6935-L90N


E6935-L90W


E6935-T90


E6935-X90

Features







Flexible Diffuser

25 W/m	IP33	24Vdc	280 LEDs/m
Lamp lumen/M @CRI 80 3254 lm/m	Luminaire lumen/M @CRI 80 2765 lm/m	14 LEDs/50mm Cutting Unit	

Photometric result of 1m 4000K luminaire



FLEX ROLL
FR8280-34

OR


LED PCB
PCB8280-36



LED DRIVER
100 W, 24Vdc

Similar Products » RECESSED


E1212 E2507 E2513 E5535 E6935(F) E9435


LINE E9435

p.27

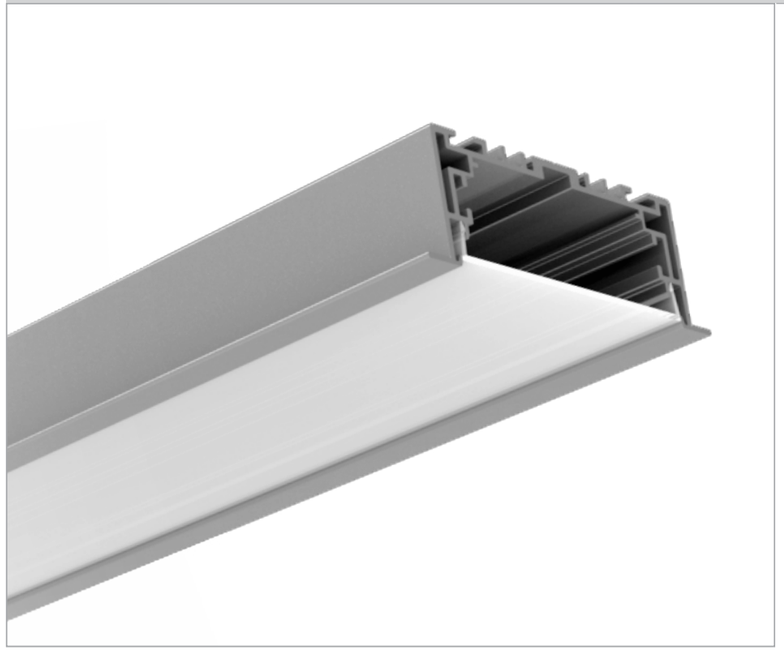

2700K 3000K 4000K 5000K 6000K





Length:
2520mm (Incl. endcap)
Refer datasheet for profile cutting calculation

W 85mm


Accessories Included



Alu. Profile/ Diffuser


End Caps x 2

(for 2500mm)

Optional



E9435-RN


E9435-RB



E9435-L90


Standard Extenders



E9435-L90N


E9435-L90W


E9435-T90


E9435-X90

Features






30 W/m	IP33	24Vdc	420 LEDs/m
Lamp lumen/M @CRI 80 3906 lm/m	Luminaire lumen/M @CRI 80 3320 lm/m	21 LEDs/50mm Cutting Unit	

Photometric result of 1m 4000K luminaire



FLEX ROLL
FR8280-34

OR


LED PCB
PCB8280-36


LED DRIVER
100 W, 24Vdc

Similar Products » RECESSED


E1212 E2507 E2513 E5535 E6935(F) E9435

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM


INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING

www.switch-made.com



INTEGRATED DRIVER




EXTERNAL DRIVER



RECESSED



WARDROBE LIGHTING



STEP LIGHTING



IP67 PROFILES



LINEAR LIGHTING



COMPONENTS

LINE W3701




LINE W3701

p.29




Motion Sensor (Optional)



Length:
1000 / 2000 / 3000mm
Customized as per project requirement

2700K 3000K 4000K 6000K



Accessories Included


Alu. Profile

PC Milky Diffuser


Alu. Plate


Hanging Holder


Fixing Clip A


Fixing Clip B


Plastic End Cap

10 W/m
120 LEDs/m
80 lm/W

5 W/m
60 LEDs/m
80 lm/W

IP20

24Vdc

CRI>80

10kg/m
Max Load

Photometric result of 1m 3000K luminaire



LED STRIP
5 W/m or 10 W/m, 24Vdc



LED DRIVER

Features







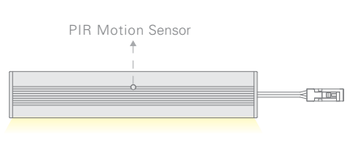

Cable Entry Options

Similar Products » WARDROB LIGHTING


W3701

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM


INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING

www.switch-made.com



INTEGRATED DRIVER




EXTERNAL DRIVER



RECESSED



WARDROBE LIGHTING



STEP LIGHTING



IP67 PROFILES



LINEAR LIGHTING




COMPONENTS

- LINE ST6528 
- LINE ST20 

LINE ST6528


p.31





IP67

Accessories Included




Alu. Profile



PC Milky Diffuser



Endcap

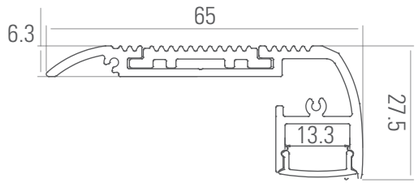

10 W/m | 120 LEDs/m | IP67

24Vdc | CRI>80 | 100 lm/W

Photometric result of 1m 3000K luminaire



LED STRIP
10 W/m, 8mm, 24Vdc




LED DRIVER

2700K 3000K 4000K 6000K

Features



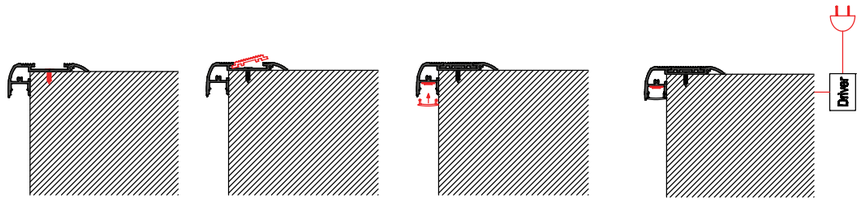

Similar Products » STEP LIGHTING



ST6528

ST20

LINE ST20


p.32

SWITCH MADE LED SOLUTIONS






IP67



Length:
1000 / 2000 / 3000mm
Customized as per project requirement

Accessories Included


Alu. Profile


PC Milky Diffuser


Endcap


Inside Corner Connector


Outside Corner Connector


15 W/m | IP67 | 75 lm/W | 120 LEDs/m | 24Vdc | CRI>80

Photometric result of 1m 3000K luminaire


LED STRIP
15 W/m, 10mm, 24Vdc



LED DRIVER

2700K 3000K 4000K 6000K





Features



Optional



Similar Products » STEP LIGHTING


ST6528

ST20

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM


INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING

www.switch-made.com



INTEGRATED DRIVER




EXTERNAL DRIVER



RECESSED



WARDROBE LIGHTING



STEP LIGHTING



IP67 PROFILES



LINEAR LIGHTING



COMPONENTS

- LINE IP0501 
- LINE IP0503 


LINE IP0501

p.34

SWITCH MADE LED SOLUTIONS



IP67



Length:
1000 / 2000 / 3000mm (Incl. endcap)
Customized as per project requirement


2700K 3000K 4000K 6000K

Accessories Included



Alu. Profile


Endcap


Mounting Channels



IP0501-CH1



IP0501-CH3



IP0501-CH4

Features






10 W/m | IP67 | 80 lm/W | 120 LEDs/m | 24Vdc | CRI>80 | 16.4kN Max. Load

Photometric result of 1m 3000K luminaire


LED STRIP
10 W/m, 10mm, 24Vdc


LED DRIVER

Similar Products » IP67 PROFILES


IP0501


IP0503

LINE IP0503

p.35




IP67

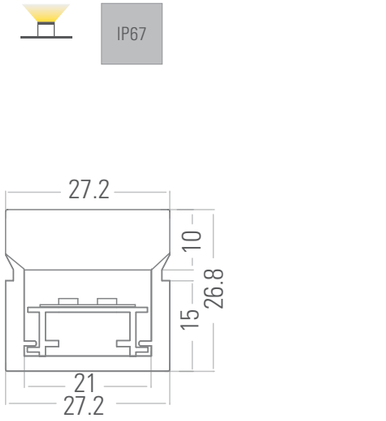


Length:
1000 / 2000 / 3000mm
Customized as per project requirement

2700K 3000K 4000K 6000K





Mounting Channels



IP0503-CH2



IP0503-CH3



IP0503-CH4

Features





20 W/m | IP67 | 100 lm/W | 240 LEDs/m | 24Vdc | 30kN Max. Load

Photometric result of 1m 3000K luminaire



LED STRIP
20 W/m, 24Vdc



LED DRIVER

Similar Products » IP67 PROFILES



IP0501 IP0503

INDOOR


- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING



INTEGRATED DRIVER




EXTERNAL DRIVER



RECESSED



WARDROBE LIGHTING



STEP LIGHTING



IP67 PROFILES



LINEAR LIGHTING



COMPONENTS


- NEONFLEX 
- LED MODULE 
- LED STRIP 

www.switch-made.com

NEONFLEX


p.37

SWITCH MADE LED SOLUTIONS

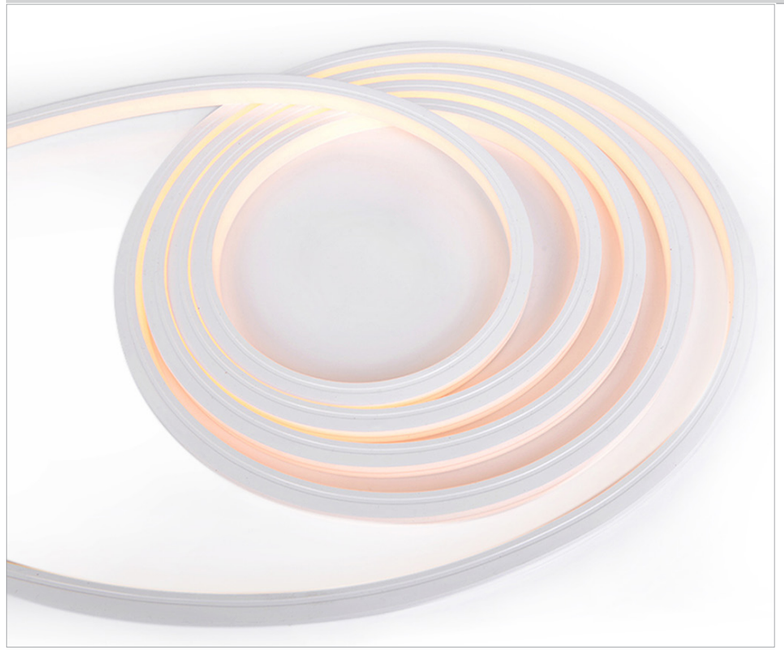

2300K 2700K 3000K 4000K 5000K 6000K

Features



NEONFLEX 1312



NEONFLEX 1615

Similar PRODUCTS



NEONFLEX



LED MODULE

24Vdc | IP67 | CRI >80 | 2835 SMD LED (Monocolor) | 5050 SMD LED (RGB) | BENDING DIA. 12cm




NEONFLEX 1312



NEONFLEX 1615



24Vdc
Remote Driver

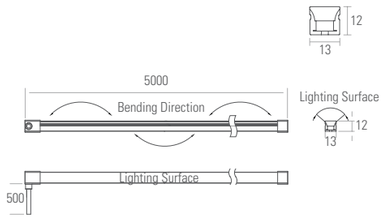

NEONFLEX 1312

CONTINUOUS LENGTH -10m

COLOR TEMP.	POWER	LUMENS	CUTTING UNIT	CODE
2700K	10 W/m	640 lm	50mm	NFX1312-27K
3000K		670 lm		NFX1312-30K
4000K		700 lm		NFX1312-40K


OPTIONAL



CONTINUOUS LENGTH -5m

CUTTING UNIT 83mm

NEONFLEX 1312 RGB, 12W/m, IP67

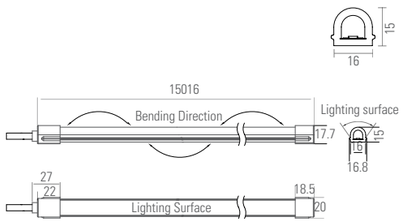

NEONFLEX 1615

CONTINUOUS LENGTH -15m

COLOR TEMP.	POWER	LUMENS	CUTTING UNIT	CODE
2700K	11 W/m	780 lm	42mm	NFX1615-27K
3000K		800 lm		NFX1615-30K
4000K		820 lm		NFX1615-40K


OPTIONAL



Lighting Surface



NEONFLEX 0612
10W/m, 21lm/W, Cutting Unit 50mm



Lighting Surface



NEONFLEX 1217
9.6W/m, 42lm/W, Cutting Unit 50mm


LED MODULE


p.38




12Vdc | IK06 | CRI >85/>90 | SAMSUNG SMD 2835 | 160° | **12Vdc** Remote Driver

2700K 3000K 4000K 5000K 6500K





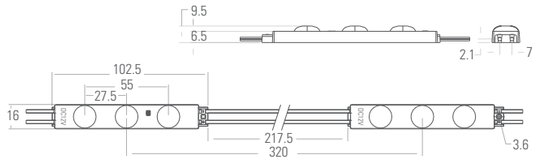

LED MODULE 1 IP67

COLOR TEMP.	POWER / MODULE	LUMENS/MODULE	CODE
3000K	1.2 W	100 lm	EXT11002-30K
4000K		110 lm	EXT11002-40K
6500K		115 lm	EXT11002-65K

LED MODULE 2 IP67

COLOR TEMP.	POWER / MODULE	LUMENS/MODULE	CODE
3000K	2 W	140 lm	EXT11005-30K
4000K		145 lm	EXT11005-40K
6500K		150 lm	EXT11005-65K

LED MODULE 3 IP65

COLOR TEMP.	POWER / MODULE	LUMENS/MODULE	CODE
3000K	3 W	285 lm	EXT11007-30K
4000K		300 lm	EXT11007-40K
6500K		315 lm	EXT11007-65K

Features


MODULE 1


MODULE 2


MODULE 3

Similar PRODUCTS


NEONFLEX


LED MODULE


LED STRIPS-24VDC

p.39



FEATURES

Extrusion Tube
IP67
Suitable for short-term wet environments




ET

Silicone Tube
IP65
Suitable for raining environments



ST

Gel Coating
IP55
Suitable for damp environments




SG

Similar PRODUCTS



LED STRIP




Large luminous surfaces, offers more uniform lights




High-dense LED distribution 282 LEDs/m



Better lumen maintenance L_{80} B_{10} 50000$_H$



No CCT shift on IP67 LED strips ET-Extrusion Tube



Higher color stability SDCM < 3

LED STRIPS-24VDC

p.40

CODE	COLOR TEMP.	POWER W/m	LUMENS lm/m	LEDs/m	WIDTH mm	MIN. CUT LEDs/mm	IMAGE	IP	SMD	CCT / COLOR
BAN01033	3000K	5	828	80	8	8/100		IP33 IP55 IP65 IP67ET IP NANO	3528	1900K 2300K 2700K 3000K 4000K 5000K 6000K
BAN01012	3000K	8	739	120	8	6/50		IP33 IP55 IP65 IP67ET IP NANO	3528	2300K 2700K 3000K 4000K 6000K R G B Y
BAN02027	3000K	15	1462	280	10	14/50		IP33 IP55 IP65 IP NANO	2216	2700K 3000K 4000K 6000K
BAN01048	3000K	17	1964	168	10	7/42		IP33 IP55 IP65 IP67ET IP NANO	2835	1900K 2300K 2700K 3000K 4000K 5000K 6000K
BAN04007	3000K	40	4800	256	12	8/31.25		IP33	2835	2700K 3000K 4000K 5000K 6500K
BAN04008	RGB	9	-	120	5	6/50		IP33	3838	RGB
BAN04009	RGB	17	-	168	10	6/35.7		IP33 IP55 IP65	3838	RGB
BAN01082	RGB	12	-	60	10	6/100		IP33 IP55 IP65 IP67ET IP NANO	5050	RGB
BAN01052	RGBW	17	-	60	12	6/600		IP33 IP55 IP65 IP NANO	5050	RGBW
BAN01083	RGB	20	-	120	12	6/50		IP33 IP NANO	3535	RGB

Features

IP68 LED strips and 12Vdc LED strips are available upon request

To order, choose :
1. The code
2. The IP rate
3. The CCT / RGBYW

Similar PRODUCTS



LED STRIP

INDOOR


- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING



INTEGRATED DRIVER




EXTERNAL DRIVER



RECESSED



WARDROBE LIGHTING



STEP LIGHTING



IP67 PROFILES



LINEAR LIGHTING



COMPONENTS

- DRIVERS 
- LED PCB 
- FLEX ROLL 

www.switch-made.com

DRIVERS-24VDC-LINE

p.42

		CODE	DIMMING MODE	INPUT VOLTAGE	INPUT CURRENT	OUTPUT VOLTAGE	POWER	DIMENSION
COMPACT		ALI04016	DALI	100-277 Vac 50-60Hz	0.38A Max	24 Vdc	30 W	377 x 21 x 19.5mm
		ALI04024	DALI	220-277 Vac 50-60Hz	0.8A Max	24 Vdc	65 W	346 x 30 x 23.5mm
		ALI04017	DALI	220-277 Vac 50-60Hz	1.15A Max	24 Vdc	100 W	373 x 39 x 27mm
		ALI04020	0-10 V, PWM, Resistance	100-277 Vac 50-60Hz	0.38A Max	24 Vdc	30 W	377 x 21 x 19.5mm
		ALI04021	0-10 V, PWM, Resistance	100-277 Vac 50-60Hz	1.8A Max	24 Vdc	65 W	346 x 30 x 23.5mm
		ALI04022	0-10 V, PWM, Resistance	100-277 Vac 50-60Hz	1.15A Max	24 Vdc	100 W	373 x 39 x 27mm

Similar PRODUCTS



COMPACT | DALI | IP RATED | LED PCB | FLEX ROLL

DRIVERS-24VDC

p.43

		CODE	DIMMABLE	INPUT	IP	OUTPUT VOLTAGE	POWER	DIMENSION
DALI		ALI04023	DALI	220-240 Vac	IP20	24 Vdc	60 W	225 x 43 x 30mm
		ALI04025	DALI	220-240 Vac	IP20	24 Vdc	100 W	295 x 43 x 30mm
		ALI04026	DALI	220-240 Vac	IP20	24 Vdc	150 W	325 x 43 x 30mm
WATERPROOF		ALI06004	1-10 V	220-240 Vac	IP67	24 Vdc	60 W	147 x 61.5 x 36.8mm
		ALI06005	1-10 V	220-240 Vac	IP67	24 Vdc	120 W	220 x 68 x 39mm
		ALI06006	1-10 V	220-240 Vac	IP67	24 Vdc	240 W	245 x 68 x 39mm
		ALI06007	1-10 V	220-240 Vac	IP67	24 Vdc	320 W	252 x 90 x 44mm

» 12Vdc drivers available upon request

Similar » PRODUCTS




COMPACT | DALI | IP RATED | LED PCB | FLEX ROLL

LED PCB

p.44


SWITCH MADE LED SOLUTIONS

- *Better heat dissipation*
- *Modules sizes of 25, 30 & 50cm*
- *Inter-connectable*

	PCB8280-17	PCB8280-23	PCB8280-36	PCB8420-62
				
Color Temperature	2700K 3000K 4000K 5000K 6000K			
Color Rendering Index	>80, >95			
Lumen /m (@4000K, CRI 80)	2700 lm/m	2700 lm/m	3250 lm/m	3900 lm/m
Input Voltage	24 Vdc			
Power /M	20 W/m	20 W/m	25 W/m	30 W/m
IP Rating	IP33			
Dimension	L 500 W 17 x H 5.6mm	L 500 W 23 x H 5.6mm	L 500 W 36 x H 5.6mm	L 500 W 62 x H 5.6mm
LEDs /M	280 LEDs	280 LEDs	280 LEDs	420 LEDs
Cutting Unit	50mm (14 LED)	50mm (14 LED)	50mm (14 LED)	50mm (21 LED)
Suitable for LINE	S3360	S4067 / E5535	S5470 / E6935	S7977 / E9435

To order, choose:
1. The code (ex: PCB8280-17)
2. The color temp. (2700K to 6000K)
3. The CRI (>80 or >95)

Similar PRODUCTS

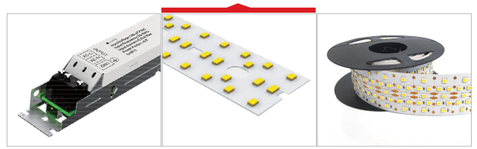


DRIVERS | LED PCB | FLEX ROLL

FLEX ROLL

p.45

SWITCH MADE LED SOLUTIONS

- *SMD2835 LED*
- *CRI 80/95*

	FR8280-15	FR8280-20	FR8280-34	FR8420-59
				
Color Temperature	2700K 3000K 4000K 5000K 6000K			
Color Rendering Index	>80, >95			
Lumen /m (@4000K, CRI 80)	2700 lm/m	2700 lm/m	3250 lm/m	3900 lm/m
Input Voltage	24 V			
Power /M	20 W/m	20 W/m	25 W/m	30 W/m
IP Rating	IP33			
Dimension	2500 x 15 x 1.5mm	2500 x 20 x 1.5mm	2500 x 34 x 1.5mm	2500 x 59 x 1.5mm
LEDs /M	280 LEDs	280 LEDs	280 LEDs	420 LEDs
Cutting Unit	50mm (14 LED)	50mm (14 LED)	50mm (14 LED)	50mm (21 LED)
Suitable for LINE	S3360	S4067 / E5535 / T60	S5470 / E6935	S7977 / E9435

To order, choose:
1. The code (ex: FR8280-15)
2. The color temp. (2700K to 6000K)
3. The CRI (>80 or >90)

Similar PRODUCTS



DRIVERS | LED PCB | FLEX ROLL

INDOOR


- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING



FRAMES



STANDY



VICE VERSA

- ROUND 
- SQUARE SOFT EDGE 
- DECONUT 
- DECORING 

www.switch-made.com

ROUND

CEILING MOUNTED / PENDANT

p.47




220-240 Vac | CRI80 | IP20 | SMD 5730 LED | **0-10V/DALI** Optional | 120°

3000K 4000K 6000K


IMAGE	DIMENSION (MM)	POWER	LUMENS	CCT	CODE - CEILING MOUNTED	CODE - PENDANT
	Ø 400 x 100 H	28 W	2520 lm	4000K	INT20016-40K	INT20021-40K
	Ø 600 x 100 H	50 W	4500 lm	4000K	INT20017-40K	INT20022-40K
	Ø 800 x 100 H	78 W	7000 lm	4000K	INT20018-40K	INT20023-40K
	Ø 1000 x 100 H	96 W	8640 lm	4000K	INT20019-40K	INT20024-40K
	Ø 1200 x 100 H	120 W	16200 lm	4000K	INT20020-40K	INT20025-40K

Features





Pendant Kit Accessories



ACC01042

Similar Products » FRAMES



ROUND | SQUARE SOFT EDGE | DECONUT | DECORING







SQUARE SOFT EDGE

CEILING MOUNTED / PENDANT

p.48



3000K 4000K


IMAGE	DIMENSION (MM)	COVER SHADE (MM)	POWER	LUMENS	CCT	CODE - CEILING MOUNTED	CODE - PENDANT
			24 W	2500 lm	4000K	INT20046-40K	INT20049-40K
			60 W	5471 lm	4000K	INT20047-40K	INT20050-40K
			144 W	13057 lm	4000K	INT20048-40K	INT20051-40K



Features



Pendant Kit Accessories

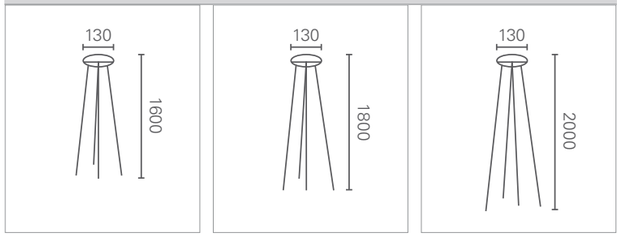

ACC01040 ACC01041 ACC01042

Cover shade accessories are available in *opal* and *opal prismatic* options

Similar Products » FRAMES



ROUND SQUARE SOFT EDGE DECONUT DECORING

DECONUT

CEILING MOUNTED / PENDANT

p.49



220-240 Vac | CRI80 | IP20 | OSRAM 2835 | **0-10V/DALI** Optional | 120°

IMAGE	DIMENSION (MM)	POWER	LUMENS	CCT	NO. OF PARTS	CODE - CEILING MOUNTED	CODE - PENDANT
	Ø 660 x 68 H x 60 W	38 W	3050 lm	4000K	1	INT20031-40K	INT20038-40K
	Ø 860 x 68 H x 60 W	50 W	4000 lm	4000K	1	INT20032-40K	INT20039-40K
	Ø 900 x 68 H x 60 W	57 W	4560 lm	4000K	1	INT20033-40K	INT20040-40K
	Ø 1060 x 68 H x 60 W	63 W	5040 lm	4000K	1	INT20034-40K	INT20041-40K
	Ø 1200 x 68 H x 60 W	75 W	6000 lm	4000K	1	INT20035-40K	INT20042-40K
	Ø 1500 x 68 H x 60 W	94 W	7520 lm	4000K	4	INT20036-40K	INT20043-40K
	Ø 2060 x 68 H x 60 W	126 W	10050 lm	4000K	6	INT20037-40K	INT20044-40K

3000K 4000K 6000K


Features




Similar Products » FRAMES




ROUND | SQUARE SOFT EDGE | DECONUT | DECORING




Pendant Kit Accessories



ACC01042

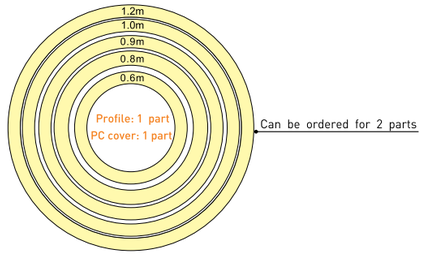

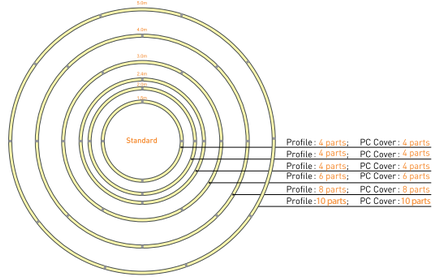

DECORING

PENDANT

p.50




220-240 Vac | 85 lm/w | CRI80 | IP20 | SMD2835 LED

IMAGE	DIMENSION (MM)	POWER	LUMENS	CCT	CODE
	Ø 400 x 80 H x 13 W	18 W	1530 lm	3000K	INT20057-30K
	Ø 600 x 80 H x 13 W	26 W	2210 lm	3000K	INT20058-30K
	Ø 800 x 80 H x 13 W	35 W	2975 lm	3000K	INT20059-30K
	Ø 1000 x 80 H x 13 W	44 W	3740 lm	3000K	INT20060-30K
	Ø 1200 x 80 H x 13 W	53 W	4505 lm	3000K	INT20061-30K

3000K 4000K



Features

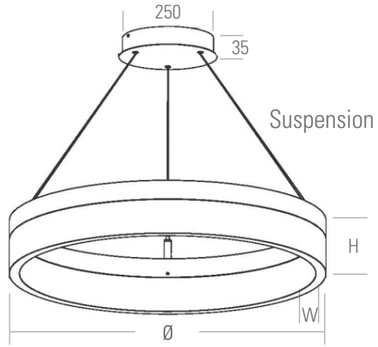

Suspension cable height: 1.4m



Similar Products » FRAMES



ROUND | SQUARE SOFT EDGE | DECONUT | DECORING

INDOOR


- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING



FRAMES



STANDY



VICE VERSA

- STANDY PIXEL 
- STANDY UNI 


www.switch-made.com

STANDY PIXEL

p.52



IP20 | 130 lm/W | CRI > 80/>90 | UGR< 6 | LUMILED LED LUXEON3030 | DIMMABLE 1-10V




Optional



Daylight Sensor




Motion Sensor



CCT Changing

3000K 4000K 6000K

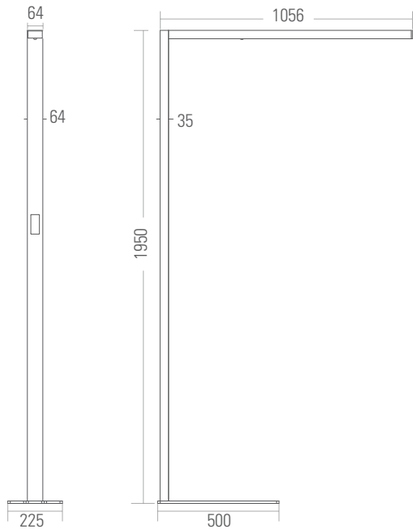




Features





Similar Products » STANDY



PIXEL

UNI

COLOR TEMP.	POWER	LUMENS	CODE
4000K	↑ 55 W x 25 W ↓	↑ 6800 lm x 3000 lm ↓	INT04189-40K
5000K	↑ 55 W x 25 W ↓	↑ 7150 lm x 3250 lm ↓	INT04189-50K

STANDY UNI

p.53




IP20 | 110 lm/W | CRI > 80/>90 | UGR< 19 | DIMMABLE **1-10V**

120°

Optional

Daylight Sensor | **Motion Sensor** | **Knob Dimming**

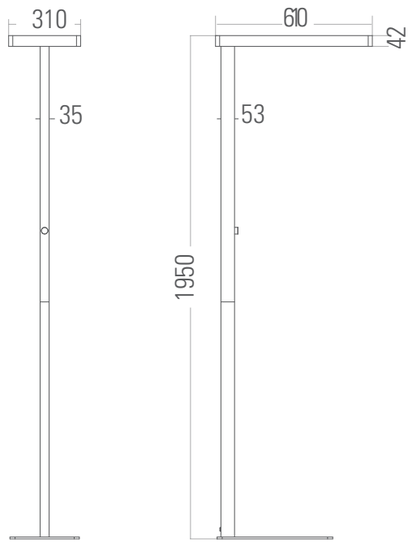

3000K 4000K 6000K



Features



Similar Products » STANDY



PIXEL UNI

COLOR TEMP.	POWER	LUMENS	CODE
4000K	↓30 W x 30 W↑	↓3100 lm x 3500 lm↑	INT04192-40K
5000K		↓3260 lm x 3680 lm↑	INT04192-50K
4000K	↓40 W x 40 W↑	↓4200 lm x 4600 lm↑	INT04193-40K
5000K		↓4420 lm x 4840 lm↑	INT04193-50K

INDOOR


- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING



FRAMES



STANDY



VICE VERSA

- PIXEL LINE 
- VICE VERSA-PIXEL 1 
- VICE VERSA-PIXEL 2 
- VICE VERSA-PIXEL 3 
- VICE VERSA-WALL 

www.switch-made.com


PIXEL LINE


p.55

SWITCH MADE LED SOLUTIONS




220-240 Vac | IP20 | 90 lm/W | CRI > 80 | UGR<19 | BRIDGELUX 5050 LED | DIMMABLE **1-10V/DALI** Optional





L90 T90 X90

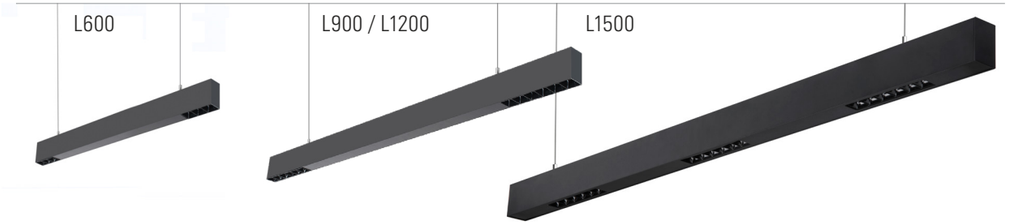

2700K 3000K 4000K 5000K


COLOR TEMP.	POWER	LUMENS	DIMENSION	CODE
4000K	20 W	1600 lm	600 L x 39 W x 75 H	INT04201-40K
4000K	30 W	2400 lm	900 L x 39 W x 75 H	INT04202-40K
4000K	40 W	3200 lm	1200 L x 39 W x 75 H	INT04203-40K
4000K	50 W	4000 lm	1500 L x 39 W x 75 H	INT04204 -40K

Features



L600 L900 / L1200 L1500

Frosted Diffuser (Optional)

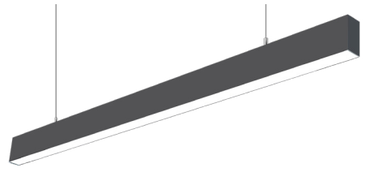

Similar Products » VICE VERSA




PIXEL LINE PIXEL 1 PIXEL 2 PIXEL 3 WALL


VICE VERSA-PIXEL 1


p.56


SWITCH MADE LED SOLUTIONS

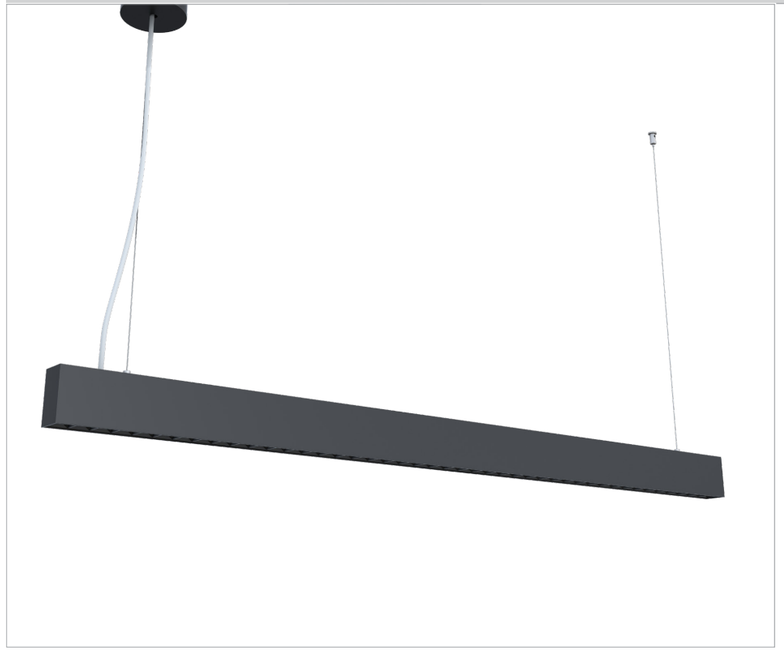

IP20	130 lm/W	CRI > 80/>90	UGR<6	SAMSUNG 2835 LED	DIMMABLE **1-10V/DALI** Optional



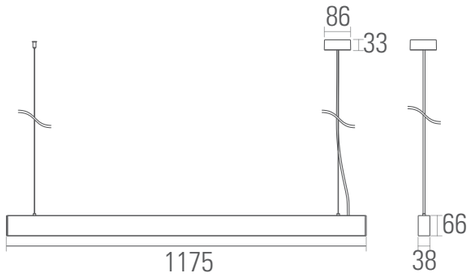


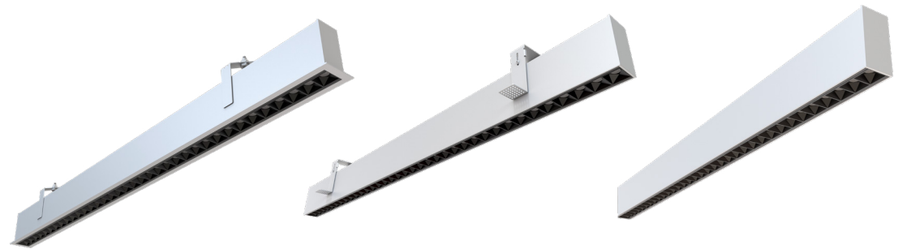


Recessed | Trimless | Surface Mounted

(Optional)

3000K 4000K 6000K




Features



Linkable design provide a clean, simple link

COLOR TEMP.	POWER	LUMENS	CODE
4000K	↓25 W x 25 W↑	↓3080 lm x 3080 lm↑	INT04205-40K
5000K		↓3250 lm x 3250 lm↑	INT04205-50K

Similar Products » VICE VERSA




PIXEL LINE | PIXEL 1 | PIXEL 2 | PIXEL 3 | WALL

VICE VERSA-PIXEL 2


p.57

SWITCH MADE LED SOLUTIONS

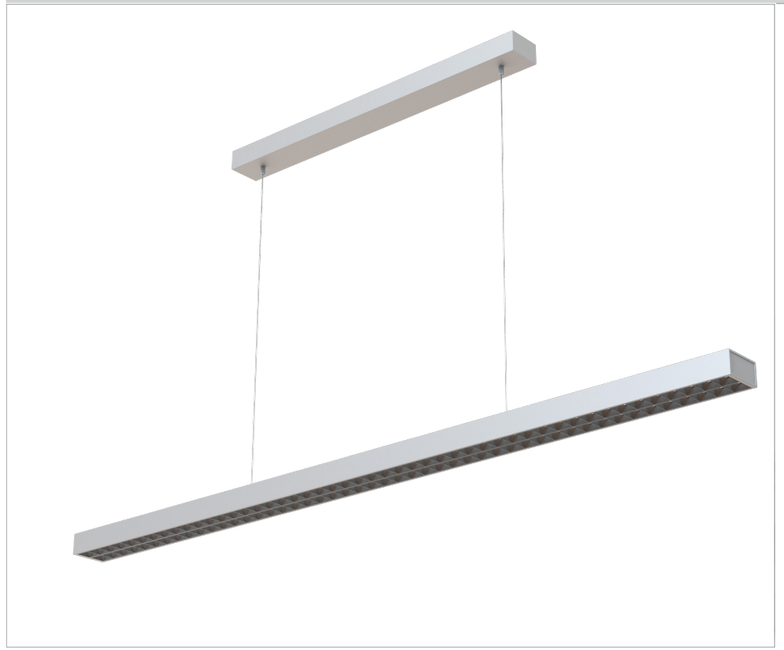

IP20 | 130 lm/W | CRI > 80/>90 | UGR<6 | 100~270V | DIMMABLE **1-10V/DALI** Optional

115°(UP) 50° (DOWN)

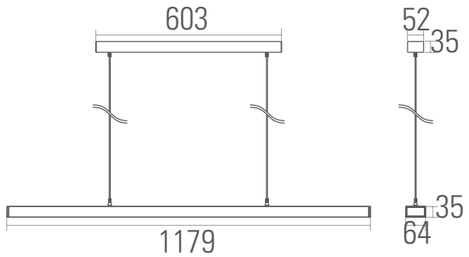




3000K 4000K 6000K

COLOR TEMP.	POWER	LUMENS	CODE
4000K	↓30 W x 30 W↑	↓3700 lm x 3700 lm↑	INT04207-40K
5000K		↓3900 lm x 3900 lm↑	INT04207-50K

Features



Similar Products » VICE VERSA



PIXEL LINE | PIXEL 1 | PIXEL 2 | PIXEL 3 | WALL


VICE VERSA-PIXEL 3

p.58



IP20 | 130 lm/W | CRI > 80/>90 | UGR<6 | 100~270V | SAMSUNG 2835 LED | DIMMABLE **1-10V/DALI** Optional

115°(UP)
50° (DOWN)

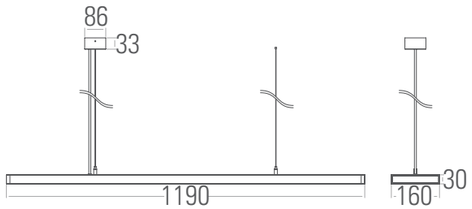




3000K 4000K 6000K

Features






Linkable design provide
a clean, simple link

COLOR TEMP.	POWER	LUMENS	CODE
4000K	↓30 W x 30 W↑	↓3700 lm x 3700 lm↑	INT04209-40K
5000K		↓3900 lm x 3900 lm↑	INT04209-50K


Similar Products » VICE VERSA



PIXEL LINE | PIXEL 1 | PIXEL 2 | PIXEL 3 | WALL


VICE VERSA-WALL


p.59

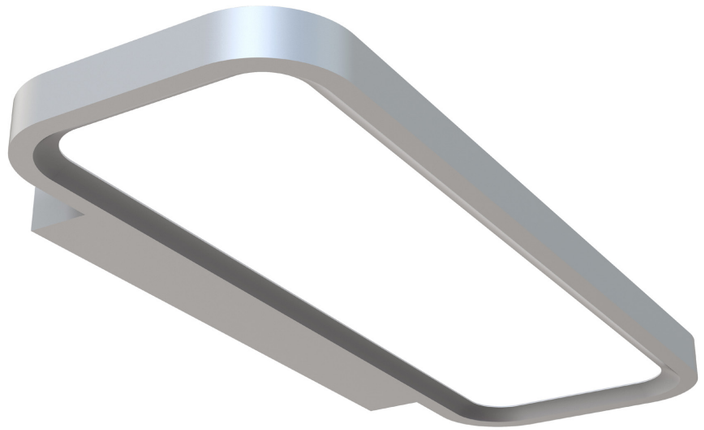

IP20 | 100 lm/W | CRI > 80/>90 | UGR<19 | DIMMABLE **1-10V/DALI** Optional

120°

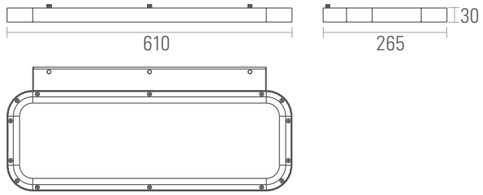

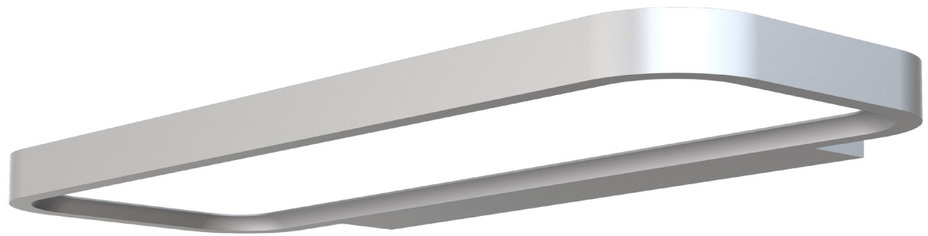


3000K 4000K 6000K

COLOR TEMP.	POWER	LUMENS	CODE
4000K	↓20 W x 20 W↑	↓2000 lm x 2000 lm↑	INT04211-40K
5000K		↓2150 lm x 2150 lm↑	INT04211-50K

Features




Similar Products » VICE VERSA



PIXEL LINE | PIXEL 1 | PIXEL 2 | PIXEL 3 | WALL

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING

CEILING RECESSED



PANELS



ACCENTUATION



ADJUSTABLE



WALLWASHER



IP RATED



GENERAL

CEILING MOUNTED



CEILING MOUNTED

- PALAOS PIXEL 
- PALAOS GRID 
- PALAOS TROFFER 
- PALAOS CLASSIC 
- PALAOS IP65 
- PALAOS DESIGN 
- PALAOS SURFACE MOUNTED 
- PALAOS CIRCULAR GYPSUM 
- PALAOS CIRCULAR 600 

www.switch-made.com

PALAOS PIXEL

p.61




220-240V ~ 50 / 60Hz | IP40 | UGR <17 | CRI>80 | SAMSUNG SMD2835 | 140 lm/W | DIMMABLE **DALI/1-10V** *Optional*



60° 90°








3000K 4000K 5000K 6000K

INSTALLATION	Suspending	Recessed Clips	Surface Mount
			

DIMENSIONS	COLOR TEMP.	POWER	LUMENS	CODE
595 L x 595 W x 21.6 H	3000K	40 W	5320 lm	INT13292-30K
	4000K		5600 lm	INT13292-40K
	5700K		5800 lm	INT13292-57K

Features




Similar Products » PANELS



PIXEL | GRID | TROFFER | CLASSIC | IP65 | DESIGN | SURFACE MOUNTED | CIRCULAR GYPSUM | CIRCULAR 600


PALAOS

p.62

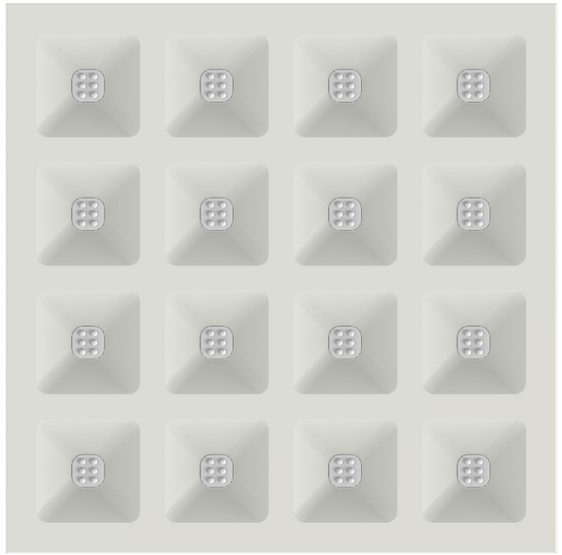

3000K 4000K 5000K 6000K


Features



PALAOS GRID PALAOS TROFFER

PALAOS GRID






220-240 ~ 50 Hz | 140 lm/W | IP40 | CRI >80 | IK08 | UGR <16 | 75°

COLOR TEMP.	POWER	LUMENS	CODE
4000K	30 W	4050 lm	INT13294-40K
5000K		4135 lm	INT13294-50K
6500K		4240 lm	INT13294-65K

PALAOS TROFFER





220-240V ~ 50 / 60Hz | IP40 | UGR <17 | CRI >80 | 110 lm/W | 120°

COLOR TEMP.	POWER	LUMENS	CODE
3000K	35 W	3500 lm	INT13298-30K
4000K		3675 lm	INT13298-40K
5000K		3850 lm	INT13298-50K

Similar Products » PANELS



PIXEL GRID TROFFER CLASSIC IP65 DESIGN SURFACE MOUNTED CIRCULAR GYPSUM CIRCULAR 600

INDOOR INDUSTRIAL OUTDOOR HOME ABOUT US OUR SUCCESS GALLERY INDEX CONTACT US

PALAOS

p.63




3000K 4000K 5000K 6000K

Features



PALAOS CLASSIC PALAOS IP65


PALAOS CLASSIC

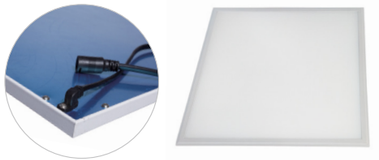

220-240 ~ 50 Hz | PF > 0.95 | IP40 | CRI >80 | IK06 | 1-10V/DALI Optional | 110°

DIMENSIONS	COLOR TEMP.	POWER	LUMENS	CODE
595 W x 595 L x 10.5 H	3000K	40 W	3850 lm	INT13251-30K
	4000K		4000 lm	INT13251-40K
	6000K		4200 lm	INT13251-60K
295 W x 1195 L x 10.5 H	4000K		3500 lm	INT13086-40K
595 W x 1195 L x 10.5 H	4000K	60 W	5450 lm	INT13092-40K


PALAOS IP65

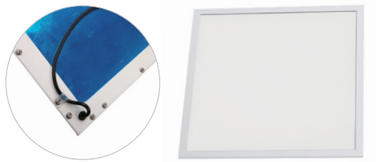

100-277V ~ LED driver IP67 | PF > 0.95 | IK06 | IP65 | 100 lm/w | 1-10V/DALI Optional | 110°

DIMENSIONS	COLOR TEMP.	POWER	LUMENS	CODE
595 W x 595 L x 10.5 H	3000K	40 W	3850 lm	INT13263-30K
	4000K		4000 lm	INT13263-40K
	6000K		4200 lm	INT13263-60K
295 W x 1195 L x 10.5 H	4000K		3500 lm	INT17021-40K
595 W x 1195 L x 10.5 H	4000K	60 W	5450 lm	INT17022-40K

Similar Products » PANELS




PIXEL | GRID | TROFFER | CLASSIC | IP65 | DESIGN | SURFACE MOUNTED | CIRCULAR GYPSUM | CIRCULAR 600

INDOOR | INDUSTRIAL | OUTDOOR | HOME | ABOUT US | OUR SUCCESS | GALLERY | INDEX | CONTACT US

PALAOS

p.64

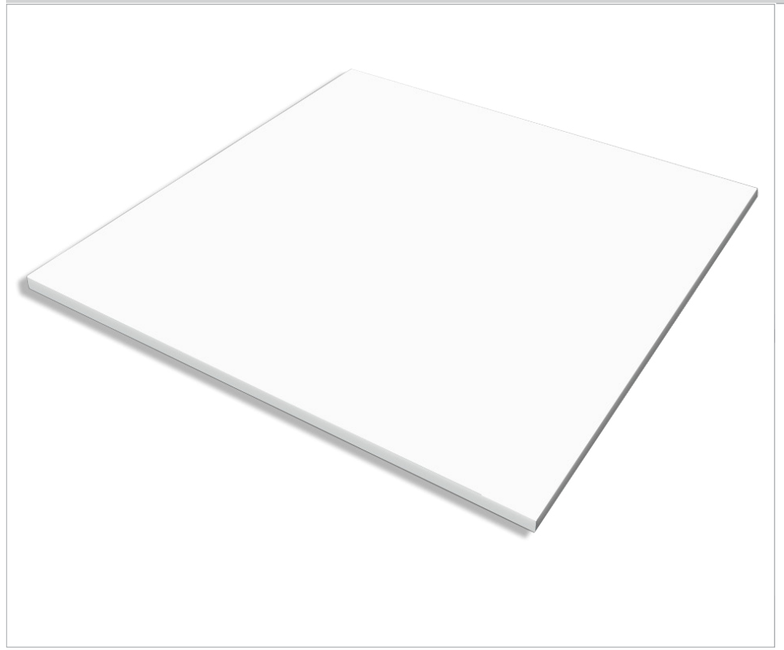

3000K 4000K 5000K 6000K


Features



DESIGN FRAMELESS DESIGN NARROW FRAME

PALAOS DESIGN

FRAMELESS

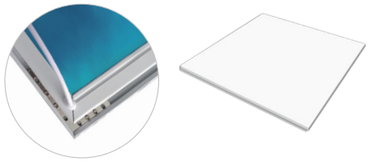


220-240 ~ 50 Hz | PF > 0.95 | IP40 | CRI >80 | IK07 | 1-10V/DALI Optional | 110°

DIMENSIONS	COLOR TEMP.	POWER	LUMENS	CODE
595 W x 595 L x 16.7 H	4000K	36 W	3420 lm	INT13172-40K
595 W x 595 L x 16.7 H	5000K		3600 lm	INT13172-50K
295 W x 1195 L x 16.7 H	4000K		3420 lm	INT13174-40K

PALAOS DESIGN


NARROW FRAME

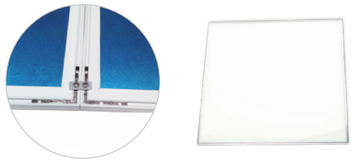

220-240 ~ 50 Hz | PF > 0.95 | IP40 | CRI >80 | IK07 | 1-10V/DALI Optional | 110°

DIMENSIONS	COLOR TEMP.	POWER	LUMENS	CODE
595 W x 595 L x 16.7 H	4000K	36 W	3350 lm	INT13175-40K
595 W x 595 L x 16.7 H	5000K		3600 lm	INT13175-50K
295 W x 1195 L x 16.7 H	4000K		3350 lm	INT13177-40K

Similar Products » PANELS



PIXEL GRID TROFFER CLASSIC IP65 DESIGN SURFACE MOUNTED CIRCULAR GYPSUM CIRCULAR 600

INDOOR INDUSTRIAL OUTDOOR HOME ABOUT US OUR SUCCESS GALLERY INDEX CONTACT US

PALAOS

p.65



3000K 4000K 5000K 6000K

PALAOS
SURFACE MOUNTED
ANGULAR

220-240 ~ 50 Hz | PF >0.95 | IP40 | IK06 | DIMMABLE **DALI/0-10V** *Optional* | 110°

DIMENSIONS	COLOR TEMP.	POWER	LUMENS	CODE
300 L x 300 W x 39 H	3000K	24 W	1500 lm	INT13320-30K
300 L x 300 W x 39 H	4000K		1680 lm	INT13320-40K
600 L x 600 W x 40 H	4000K	48 W	4200 lm	INT13324-40K

PALAOS
SURFACE MOUNTED
CIRCULAR

220-240 ~ 50 Hz | PF > 0.95 | IP40 | IK06 | DIMMABLE **DALI/0-10V** *Optional* | 110°

DIMENSIONS	COLOR TEMP.	POWER	LUMENS	CODE
Ø 300 x 39	3000K	24 W	1500 lm	INT13310-30K
Ø 300 x 39	4000K		1680 lm	INT13310-40K
Ø 600 x 40	4000K	48 W	4200 lm	INT13360-40K

Features



ANGULAR CIRCULAR

Similar Products » PANELS



PIXEL GRID TROFFER CLASSIC IP65 DESIGN SURFACE MOUNTED CIRCULAR GYPSUM CIRCULAR 600

PALAOS

p.66



230Vac | IP44 | IK07 | CRI >80 | DIMMABLE **DALI/0-10V** *Optional*

110°

3000K 4000K 5000K 6000K

Features



CIRCULAR GYPSUM Ø170



DIMENSIONS	COLOR TEMP.	POWER	LUMENS	CODE
Ø 170 x 22	3000K	12 W	760 lm	INT13067-30K
	4000K		850 lm	INT13067-40K

CIRCULAR GYPSUM Ø225



DIMENSIONS	COLOR TEMP.	POWER	LUMENS	CODE
Ø 225 x 22	3000K	18 W	1225 lm	INT13153-30K
	4000K		1375 lm	INT13153-40K


CIRCULAR GYPSUM Ø300



DIMENSIONS	COLOR TEMP.	POWER	LUMENS	CODE
Ø 300 x 22	3000K	24 W	1690 lm	INT13247-30K
	4000K		1870 lm	INT13247-40K
	6000K		1890 lm	INT13247-60K

Similar Products » PANELS

PIXEL | GRID | TROFFER | CLASSIC | IP65 | DESIGN | SURFACE MOUNTED | CIRCULAR GYPSUM | CIRCULAR 600





PALAOS ANGULAR GYPSUM
(Optional)
INT13155

PALAOS

p.67



220-240 Vac	IP40	IK06	UGR <22	CRI >80	BRIDGELUX 2835 LED	DIMMABLE **0-10V/DALI** *Optional*	110°

3000K 4000K 5000K 6000K

Features




CIRCULAR 600 **SUSPENDED**


COLOR TEMP.	POWER	LUMENS	CODE
3000K	48 W	3840 lm	INT13231-30K
4000K		4032 lm	INT13231-40K

CIRCULAR 600 **MOUNTED**

COLOR TEMP.	POWER	LUMENS	CODE
3000K	48 W	3840 lm	INT13241-30K
4000K		4032 lm	INT13241-30K

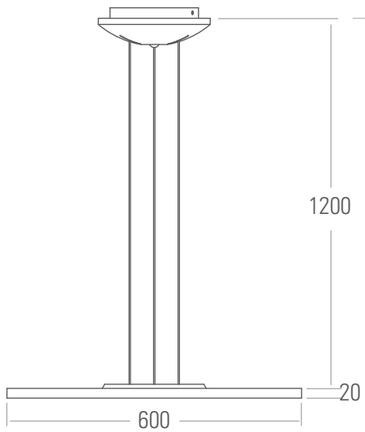

SUSPENDED



MOUNTED

Similar Products » PANELS



PIXEL | GRID | TROFFER | CLASSIC | IP65 | DESIGN | SURFACE MOUNTED | CIRCULAR GYPSUM | CIRCULAR 600

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING

CEILING RECESSED



PANELS



ACCENTUATION



ADJUSTABLE



WALLWASHER



IP RATED



GENERAL

CEILING MOUNTED



CEILING MOUNTED

CELESTIA	
BLACKMOON	
RESSY	
SWAT	
NEPTUNE	
NEVUS	
SHUTTLE	
CHROME-R	
CHROME-S	
NICKEL-D	
NICKEL MINI	
NICKEL-W	
PIXEL GRID	

www.switch-made.com

CELESTIA

p.69



2700K 3000K 4000K

Features


60 SS RECESSED


80 SS RECESSED

Similar Products » CELESTIA

CELESTIA SS | CELESTIA SD | CELESTIA FP | CELESTIA SC

220-240V | IP43 | BRIDGELUX LED | CRI >90 | DIMMABLE **DALI/1-10V** *Optional*





CELESTIA 60 SS RECESSED

18° 24° 37° 60°

COLOR TEMP.	POWER	LUMENS	CODE
2700K	8.5 W	556 lm	INT20108-27K
3000K		621 lm	INT20108-30K
4000K		696 lm	INT20108-40K

CELESTIA 80 SS RECESSED

24° 40° 60°

COLOR TEMP.	POWER	LUMENS	CODE
2700K	12 W	824 lm	INT20115-27K
3000K		942 lm	INT20115-30K
4000K		1017 lm	INT20115-40K

RECESSED | SURFACE | SUSPENDED | TRACK

CELESTIA Family




CELESTIA 60 SP RECESSED
INT20110

OPTIONAL


CELESTIA

p.70

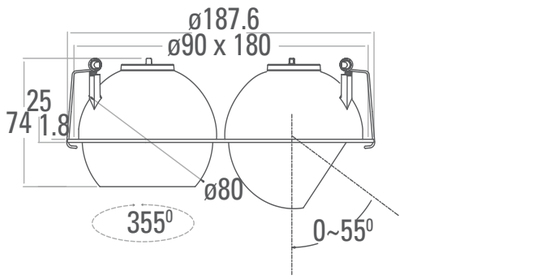

220-240V | IP43 | BRIDGELUX LED | CRI >90 | DIMMABLE **DALI/1-10V** *Optional*


2700K 3000K 4000K



CELESTIA 60 SD RECESSED

18° 24° 37° 60°

COLOR TEMP.	POWER	LUMENS	CODE
2700K	2 x 8.5 W	1112 lm	INT20109-27K
3000K		1242 lm	INT20109-30K
4000K		1392 lm	INT20109-40K



CELESTIA 80 SD RECESSED

24° 40° 60°

COLOR TEMP.	POWER	LUMENS	CODE
2700K	2 x 12 W	1648 lm	INT20116-27K
3000K		1884 lm	INT20116-30K
4000K		2034 lm	INT20116-40K

Features



60 SD RECESSED | 80 SD RECESSED

Similar Products » CELESTIA



CELESTIA SS | CELESTIA SD | CELESTIA FP | CELESTIA SC



RECESSED | SURFACE | SUSPENDED | TRACK

CELESTIA Family


CELESTIA

p.71




220-240V | IP43 | BRIDGELUX LED | CRI >90 | DIMMABLE **DALI/1-10V** *Optional*


2700K 3000K 4000K




CELESTIA 60 FP RECESSED



COLOR TEMP.	POWER	LUMENS	CODE
2700K	8.5 W	556 lm	INT20111-27K
3000K		621 lm	INT20111-30K
4000K		696 lm	INT20111-40K



CELESTIA 80 FP RECESSED




COLOR TEMP.	POWER	LUMENS	CODE
2700K	12 W	824 lm	INT20117-27K
3000K		942 lm	INT20117-30K
4000K		1017 lm	INT20117-40K

Features



60 FP RECESSED | 80 FP RECESSED

Similar Products » CELESTIA

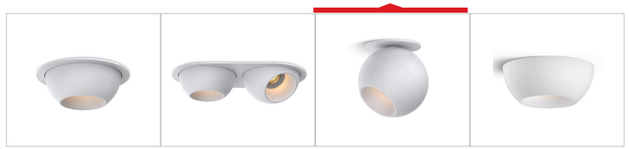

CELESTIA SS | CELESTIA SD | CELESTIA FP | CELESTIA SC



RECESSED | SURFACE | SUSPENDED | TRACK

CELESTIA Family

CELESTIA

p.72



220-240V | IP43 | BRIDGELUX LED | CRI >90 | DIMMABLE **DALI/1-10V** *Optional*

2700K 3000K 4000K

Features




100 SC RECESSED | 130 SC RECESSED

Similar Products » CELESTIA




CELESTIA SS | CELESTIA SD | CELESTIA FP | CELESTIA SC

Next...



CELESTIA 100 SC RECESSED




COLOR TEMP.	POWER	LUMENS	CODE
2700K	15 W	1124 lm	INT20123-27K
3000K		1284 lm	INT20123-30K
4000K		1364 lm	INT20123-40K



CELESTIA 100 SC RECESSED 90D
INT20124
OPTIONAL

CELESTIA 130 SC RECESSED



COLOR TEMP.	POWER	LUMENS	CODE
2700K	21 W	1605 lm	INT20130-27K
3000K		1798 lm	INT20130-30K
4000K		1926 lm	INT20130-40K



CELESTIA 130 SC RECESSED 90D
INT20131
OPTIONAL



RECESSED | SURFACE | SUSPENDED | TRACK

CELESTIA Family


BLACKMOON 3

p.73



220-240V 50/60Hz | IP44 | UGR <10 | CRI >80/>90/>97 | CITIZEN LED

18° 36°





COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	3 W	90+	180 lm	INT03026-27K
3000K			190 lm	INT03026-30K
4000K			210 lm	INT03026-40K

2700K 3000K 4000K 5000K

Features



FINISH

Body: *White (WH) - Black (BK) - Gold (GD)*

Reflector: *High Gloss Black (HGB) - High Gloss Silver (HGS) - Frosted (FS) - White (WH) - Gold (GD)*



BK-FS | BK-HGS | BK-GD | BK-WH | GD-GD | WH-GD | WH-HGB | WH-WH

Similar Products » BLACKMOON



BLACKMOON 3 | BLACKMOON 8 | BLACKMOON 10 | BLACKMOON 14 | BLACKMOON 20 | BLACKMOON 28


BLACKMOON 8

p.74



220-240V 50-60Hz | IP44 | UGR <19 | CRI >80/>90/>97 | CITIZEN 1002 LED | DIMMABLE **1-10V/DALI** *Optional*

24° 40° 60°





COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	8 W	90+	704 lm	INT02029-27K
3000K			712 lm	INT02029-30K
4000K			740 lm	INT02029-40K

2700K 3000K 4000K 5000K



BLACKMOON 8 ADJUSTABLE
INT06019

OPTIONAL

Features



FINISH

Body: *White (WH) - Black (BK) - Gold (GD)*

Reflector: *High Gloss Black (HGB) - High Gloss Silver (HGS) - Frosted (FS) - White (WH) - Gold (GD)*



BK-FS | WH-HGS | BK-GD | BK-WH | GD-GD | BK-HGB | WH-HGB | WH-WH

Similar Products » BLACKMOON



BLACKMOON 3 | BLACKMOON 8 | BLACKMOON 10 | BLACKMOON 14 | BLACKMOON 20 | BLACKMOON 28

BLACKMOON 10


p.75

SWITCH MADE LED SOLUTIONS



220-240V 50-60Hz | IP44 | UGR <19 | CRI >80/>90/>97 | CITIZEN 1002 LED | DIMMABLE **1-10V/DALI** *Optional*

24° 40° 60°





COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	10 W	90+	886 lm	INT02030-27K
3000K			900 lm	INT02030-30K
4000K			927 lm	INT02030-40K

2700K 3000K 4000K 5000K



BLACKMOON 10 ADJUSTABLE
INT03088

OPTIONAL

Features



FINISH

Body: *White (WH) - Black (BK) - Gold (GD)*

Reflector: *High Gloss Black (HGB) - High Gloss Silver (HGS) - Frosted (FS) - White (WH) - Gold (GD)*



BK-FS | WH-HGS | BK-GD | BK-WH | GD-GD | BK-HGB | WH-HGB | WH-WH

Similar Products » BLACKMOON



BLACKMOON 3 | BLACKMOON 8 | BLACKMOON 10 | BLACKMOON 14 | BLACKMOON 20 | BLACKMOON 28

BLACKMOON 14


p.76

SWITCH MADE LED SOLUTIONS



220-240V 50-60Hz | IP44 | UGR <19 | CRI >80/>90/>97 | CITIZEN LED CLU028-1204 | DIMMABLE **1-10V/DALI** *Optional*

24° 40° 60°





COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	14 W	90+	1280 lm	INT02034-27K
3000K			1300 lm	INT02034-30K
4000K			1350 lm	INT02034-40K

2700K 3000K 4000K 5000K

Features



BLACKMOON 14 ADJUSTABLE
INT06029

OPTIONAL

FINISH

Body: *White (WH) - Black (BK) - Gold (GD)*

Reflector: *High Gloss Black (HGB) - High Gloss Silver (HGS) - Frosted (FS) - White (WH) - Gold (GD)*



Similar Products » BLACKMOON



BLACKMOON 3 | BLACKMOON 8 | BLACKMOON 10 | BLACKMOON 14 | BLACKMOON 20 | BLACKMOON 28


BLACKMOON 20

p.77



220-240V 50-60Hz | IP44 | UGR <19 | CRI >80/>90/>97 | CITIZEN LED CLU038-1208 | DIMMABLE **1-10V/DALI** *Optional*

24° 36° 60°





COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	20 W	90+	1900 lm	INT02040-27K
3000K			2050 lm	INT02040-30K
4000K			2250 lm	INT02040-40K
6000K			2363 lm	INT02040-60K

2700K 3000K 4000K 5000K

Features

FINISH

Body: *White (WH) - Black (BK) - Gold (GD)*

Reflector: *High Gloss Black (HGB) - High Gloss Silver (HGS) - Frosted (FS) - White (WH) - Gold (GD)*



Similar Products » BLACKMOON




BLACKMOON 28

p.78



220-240V 50-60Hz | IP44 | UGR <19 | CRI >80/>90/>97 | CITIZEN LED CLU038-1208 | DIMMABLE **1-10V/DALI** *Optional*

24° 36° 55°





COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	28 W	90+	2600 lm	INT02037-27K
3000K			2800 lm	INT02037-30K
4000K			3000 lm	INT02037-40K

2700K 3000K 4000K 5000K

Features



FINISH

Body: *White (WH) - Black (BK) - Gold (GD)*

Reflector: *High Gloss Black (HGB) - High Gloss Silver (HGS) - Frosted (FS) - White (WH) - Gold (GD)*



BK-FS | WH-GD | BK-GD | BK-WH | GD-GD | BK-HGS | WH-HGB | WH-WH

Similar Products » BLACKMOON



BLACKMOON 3 | BLACKMOON 8 | BLACKMOON 10 | BLACKMOON 14 | BLACKMOON 20 | BLACKMOON 28

Next...


RESSY

p.79



IP44 / IP20 | UGR <11 | CRI >90 | CITIZEN COB LED

24° 36° 60°





COLOR TEMP.	POWER	IP	CRI	LUMENS	CODE
2700K	7 W	IP20	90+	534 lm	INT02041-27K
3000K				550 lm	INT02041-30K
4000K				600 lm	INT02041-40K
2700K	7 W	IP44	90+	534 lm	INT10070-27K
3000K				550 lm	INT10070-30K
4000K				600 lm	INT10070-40K

2700K 3000K 4000K

Features



FINISH

Trim: *White (WH), Black (BK)*

Reflector: *White (WH), Anodized Black (AB), Dark Chrome (DC), White Chrome (WC), Rose Gold (RG), Matt Gold (MG), Anodized Gold (AG)*



IP20 IP44



WH-AB WH-DC WH-WC WH-RG WH-MG WH-AG

Similar Products » RESSY




RESSY

Next...


SWAT 3

p.80

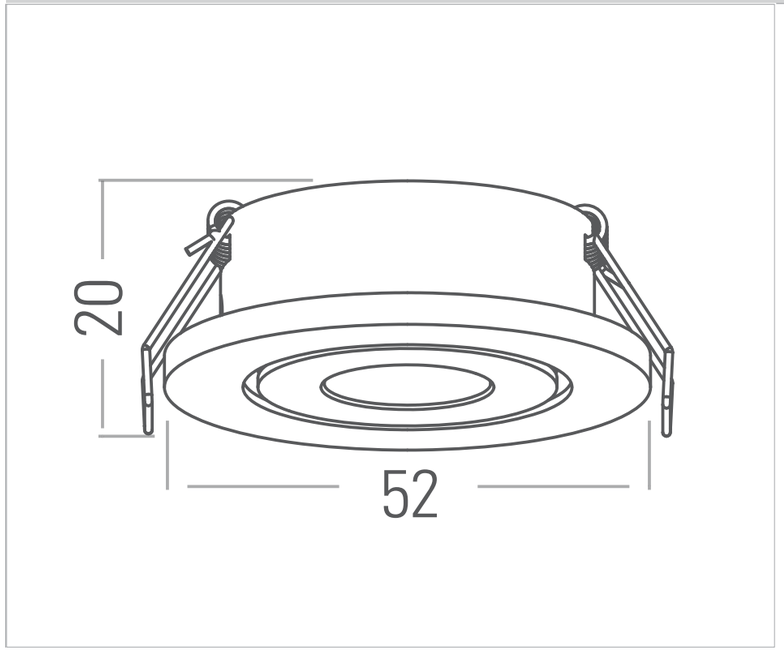

220-240V 50-60Hz | IP20 | CREE COB | CRI >80>90 | DIMMABLE **DALI** *Optional*

24°





2700K 3000K 4000K 5000K

Features





SWAT 3-1

COLOR TEMP.	POWER	LUMENS	CODE
2700K	1 W	72 lm	INT10000-27K
3000K		80 lm	INT10000-30K
4000K		88 lm	INT10000-40K

SWAT 3-3

COLOR TEMP.	POWER	LUMENS	CODE
2700K	3 W	192 lm	INT10006-27K
3000K		216 lm	INT10006-30K
4000K		240 lm	INT10006-40K

Similar Products » SWAT



SWAT 3

Next...


NEPTUNE-R

p.81



220-240V 50-60Hz | IP43 | 100lm/W | BRIDGELUX V8 LED | CRI >80/>90/>97 | DIMMABLE **DALI/1-10V** *Optional*

32° 45°

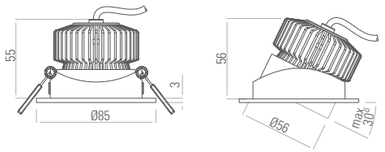




2700K 3000K 4000K 5000K

Features





NEPTUNE 8 R

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	8 W	80+	650 lm	INT10025-27K
3000K			720 lm	INT10025-30K
4000K			800 lm	INT10025-40K

NEPTUNE 10 R

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	10 W	80+	850 lm	INT05026-27K
3000K			950 lm	INT05026-30K
4000K			1000 lm	INT05026-40K

Similar Products » NEPTUNE




NEPTUNE - R



NEPTUNE - S


NEPTUNE-S

p.82

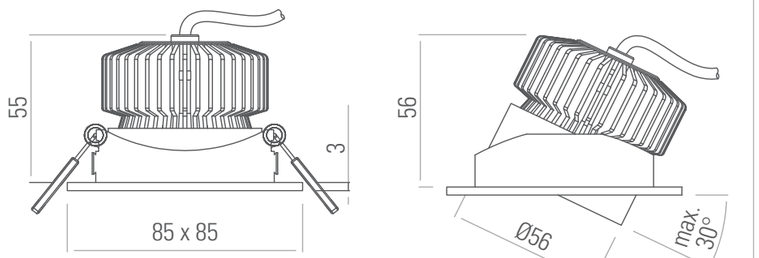

220-240V 50-60Hz | IP43 | 100lm/W | BRIDGELUX V8 LED | CRI >80/>90/>97 | DIMMABLE **DALI/1-10V** *Optional*

32° 45°

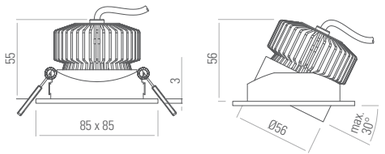



2700K 3000K 4000K 5000K



Features

NEPTUNE 8 S

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	8 W	80+	650 lm	INT10028-27K
3000K			720 lm	INT10028-30K
4000K			800 lm	INT10028-40K

NEPTUNE 10 S

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	10 W	80+	850 lm	INT10059-27K
3000K			950 lm	INT10059-30K
4000K			1000 lm	INT10059-40K

Similar Products » NEPTUNE



NEPTUNE - R

NEPTUNE - S

Next...

NEVUS

p.83



230 Vac | IP44 | IK06 | CRI >80/>90 | CREE LED | DIMMABLE **DALI/0-10V** *Optional*


15° 24° 36°

2700K 3000K 4000K 5000K

Features



NEVUS 75


NEVUS 85



NEVUS 75

COLOR TEMP.	POWER	CRI	LUMENS	CODE
3000K	5 W	80+	415 lm	INT20097-30K
4000K			435 lm	INT20097-40K



NEVUS 85

COLOR TEMP.	POWER	CRI	LUMENS	CODE
3000K	10 W	80+	800 lm	INT20096-30K
4000K			850 lm	INT20096-40K

Similar Products » NEVUS


NEVUS

Next...

SHUTTLE

p.84

SWITCH MADE LED SOLUTIONS




230 Vac | CREE COB LED | IP44 | UGR <14 | CRI >85 | DIMMABLE **DALI/0-10V** *Optional*


15º 24º 38º


2700K 3000K 4000K 5000K




Features









SHUTTLE 12

CREE 1507 LED

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	12 W	80+	1060 lm	INT05106-27K
3000K			1100 lm	INT05106-30K
4000K			1140 lm	INT05106-40K

SHUTTLE 20

CREE 1512 LED

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	20 W	80+	1780 lm	INT05110-27K
3000K			1880 lm	INT05110-30K
4000K			1920 lm	INT05110-40K

SHUTTLE 30

CREE 1820 LED

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	30 W	80+	2670 lm	INT05112-27K
3000K			2760 lm	INT05112-30K
4000K			2880 lm	INT05112-40K

SHUTTLE 40

CREE 1830 LED

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	40 W	80+	3520lm	INT05115-27K
3000K			3720 lm	INT05115-30K
4000K			3840 lm	INT05115-40K

Similar Products » SHUTTLE



SHUTTLE

Next...



SHUTTLE ADJ.

OPTIONAL

CHROME-R

p.85



220-240V 50-60Hz | IP43 | 100 lm/W | CRI >80/>90/>97 | DIMMABLE **DALI/1-10V** *Optional*

30° 38° — CHROME 8 /10 - R

36° 60° — CHROME 14 - R

2700K 3000K 4000K 5000K

Features




CHROME 8 /10 - R CHROME 14 - R

Similar Products » CHROME - R




CHROME 8 - R | CHROME 10 - R | CHROME 14 - R | CHROME 28 - R | CHROME 35 - R



CHROME 8 R ADJUSTABLE / FIXED

BRIDGELUX V8 LED


COLOR TEMP.	POWER	CRI	LUMENS	CODE ADJ.	CODE FIXED
2700K	8 W	80+	620 lm	INT05021-27K	INT20003-27K
3000K			680 lm	INT05021-30K	INT20003-30K
4000K			730 lm	INT05021-40K	INT20003-40K



CHROME 10 R ADJUSTABLE / FIXED

BRIDGELUX V8 LED

COLOR TEMP.	POWER	CRI	LUMENS	CODE ADJ.	CODE FIXED
2700K	10 W	80+	780 lm	INT20000-27K	INT10063-27K
3000K			900 lm	INT20000-30K	INT10063-30K
4000K			980 lm	INT20000-40K	INT10063-40K

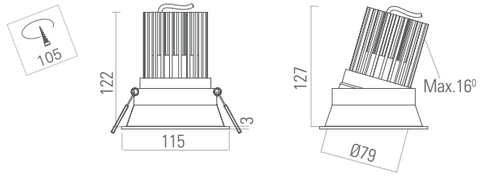

CHROME 14 R ADJUSTABLE / FIXED

CITIZEN 1204 LED

COLOR TEMP.	POWER	CRI	LUMENS	CODE ADJ.	CODE FIXED
2700K	14 W	90+	1256 lm	INT05023-27K	INT20001-27K
3000K			1350 lm	INT05023-30K	INT20001-30K
4000K			1450 lm	INT05023-40K	INT20001-40K


CHROME-R

p.86


SWITCH MADE LED SOLUTIONS



220-240V 50-60Hz | 100 lm/W | CITIZEN 1208 LED | CRI >80/>90/>97 | DIMMABLE **DALI/1-10V** *Optional*




CHROME 28 - R



CHROME 35 - R




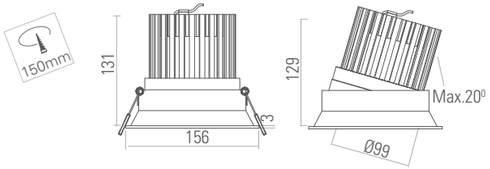

CHROME 28 R ADJUSTABLE / FIXED

IP44

COLOR TEMP.	POWER	CRI	LUMENS	CODE ADJ.	CODE FIXED
2700K	28 W	90+	2800 lm	INT05029-27K	INT20002-27K
3000K			2980 lm	INT05029-30K	INT20002-30K
4000K			3100 lm	INT05029-40K	INT20002-40K



CHROME 35 R FIXED

IP54

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	35 W	90+	3200 lm	INT05032-27K
3000K			3350 lm	INT05032-30K
4000K			3500 lm	INT05032-40K

2700K 3000K 4000K 5000K

Features



CHROME 28 - R CHROME 35 - R

Similar Products » CHROME - R



CHROME 8 - R | CHROME 10 - R | CHROME 14 - R | CHROME 28 - R | CHROME 35 - R

Next...


CHROME-S

p.87


SWITCH MADE LED SOLUTIONS



220-240V 50-60Hz | IP43 | 100 lm/W | CRI >80/>90/>97 | DIMMABLE **DALI/1-10V** *Optional*



CHROME 8 /10 - S | CHROME 14 -S | CHROME 28 - S



CHROME 8 S ADJUSTABLE / FIXED


BRIDGELUX V8 LED

COLOR TEMP.	POWER	LUMENS	CODE ADJ.	CODE FIXED
2700K	8 W	600 lm	INT05038-27K	INT05040-27K
3000K		650 lm	INT05038-30K	INT05040-30K
4000K		720 lm	INT05038-40K	INT05040-40K

CHROME 10 S ADJUSTABLE / FIXED

BRIDGELUX V8 LED


COLOR TEMP.	POWER	LUMENS	CODE ADJ.	CODE FIXED
2700K	10 W	780 lm	INT05039-27K	INT05043-27K
3000K		850 lm	INT05039-30K	INT05043-30K
4000K		910 lm	INT05039-40K	INT05043-40K



CHROME 14 S ADJUSTABLE / FIXED

CITIZEN 1204 LED

COLOR TEMP.	POWER	LUMENS	CODE ADJ.	CODE FIXED
2700K	14 W	1180 lm	INT05047-27K	INT05052-27K
3000K		1250 lm	INT05047-30K	INT05052-30K
4000K		1350 lm	INT05047-40K	INT05052-40K

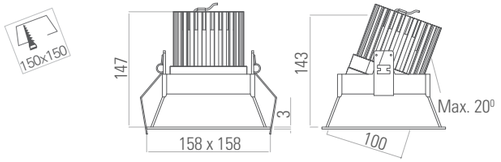

CHROME 28 S ADJUSTABLE / FIXED

CITIZEN 1208 LED

COLOR TEMP.	POWER	LUMENS	CODE ADJ.	CODE FIXED
2700K	28 W	2450 lm	INT05049-27K	INT05053-27K
3000K		2550 lm	INT05049-30K	INT05053-30K
4000K		2750 lm	INT05049-40K	INT05053-40K

2700K 3000K 4000K 5000K

Features



CHROME 8 /10 - S | CHROME 14 / 28 - S

Similar Products » CHROME - S



CHROME S

Next...


NICKEL-D

p.88



220-240V 50-60Hz | IP44 | 90 lm/W | BRIDGELUX V8 LED | CRI >80/>90/>97 | DIMMABLE **DALI/1-10V** *Optional*

32° 40°

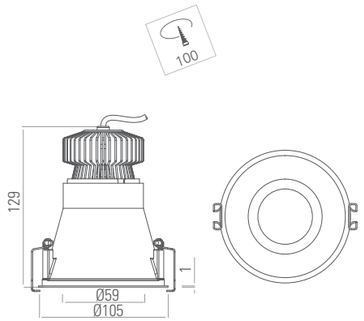

2700K 3000K 4000K 5000K


NICKEL 8 D

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	8 W	80+	540 lm	INT06001-27K
3000K			600 lm	INT06001-30K
4000K			680 lm	INT06001-40K

NICKEL 10 D

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	10 W	80+	750 lm	INT06004-27K
3000K			820 lm	INT06004-30K
4000K			900 lm	INT06004-40K

Finish: *Purple (PP), Sand White (SW), Blue (BL), Sand Black (SB), Aquamarine (AM), Sand NIckel Grey (NG), Gold (GD), Gold Grey (GG)*

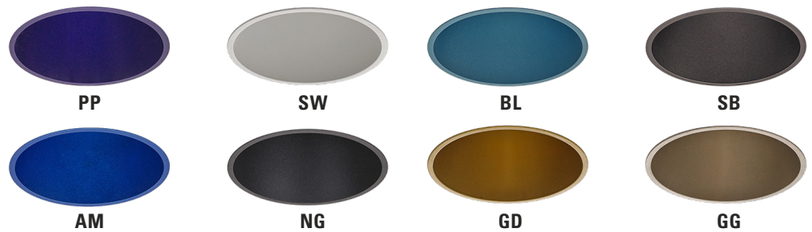

Features



Optional

Similar Products » NICKEL



NICKEL - D | NICKEL - MINI | NICKEL - W

NICKEL MINI


p.89




220-240V 50-60Hz | IP44 | 100 lm/W | BRIDGELUX V8 LED | CRI >80/>90/>97 | DIMMABLE **DALI/1-10V** *Optional*

24° 40°

2700K 3000K 4000K 5000K





NICKEL 8 MINI

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	8 W	80+	620 lm	INT06013-27K
3000K			680 lm	INT06013-30K
4000K			760 lm	INT06013-40K

NICKEL 10 MINI

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	10 W	80+	780 lm	INT06016-27K
3000K			850 lm	INT06016-30K
4000K			930 lm	INT06016-40K

Features



Finish: *White (WH), Black (BK), Gold (GD)*



WH



BK



GD

Similar Products » NICKEL



NICKEL - D | NICKEL - MINI | NICKEL - W


NICKEL-W

p.90



220-240V 50-60Hz | IP44 | 100 lm/W | BRIDGELUX V8 LED | CRI >80/>90/>97 | DIMMABLE **DALI/1-10V** *Optional*

45°

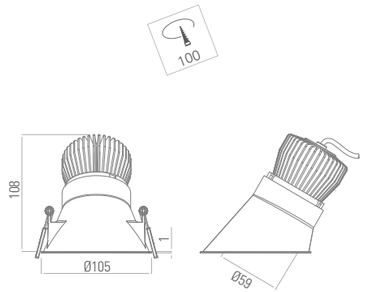

2700K 3000K 4000K 5000K

NICKEL 8 W

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	8 W	80+	620 lm	INT06007-27K
3000K			680 lm	INT06007-30K
4000K			750 lm	INT06007-40K

NICKEL 10 W

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	10 W	80+	710 lm	INT06052-27K
3000K			780 lm	INT06052-30K
4000K			850 lm	INT06052-40K

Features



Finish: *Purple (PP), Sand White (SW), Blue (BL), Sand Black (SB), Aquamarine (AM), Sand NIckel Grey (NG), Gold (GD), Gold Grey (GG)*



Optional

Similar Products » NICKEL



NICKEL - D | NICKEL - MINI | NICKEL - W

Next...

PIXEL GRID

p.91

SWITCH MADE LED SOLUTIONS



220-240V 50-60Hz | IP20 | CREE LED | CRI >80 | DIMMABLE **DALI/1-10V** *Optional*

15° 30° 45°

2700K 3000K 4000K

Features




GRID 1 GRID 2 GRID 5

Similar Products » PIXEL GRID




GRID 1 GRID 2 GRID 5 GRID 10 GRID 15




PIXEL GRID 1

COLOR TEMP.	POWER	LUMENS	CODE
2700K	2 W	156 lm	INT08048-27K
3000K		164 lm	INT08048-30K
4000K		170 lm	INT08048-40K



PIXEL GRID 2

COLOR TEMP.	POWER	LUMENS	CODE
2700K	2 x 2 W	312 lm	INT08051-27K
3000K		320 lm	INT08051-30K
4000K		340 lm	INT08051-40K




PIXEL GRID 5

COLOR TEMP.	POWER	LUMENS	CODE
2700K	5 x 2 W	800 lm	INT08055-27K
3000K		850 lm	INT08055-30K
4000K		890 lm	INT08055-40K

PIXEL GRID

p.92

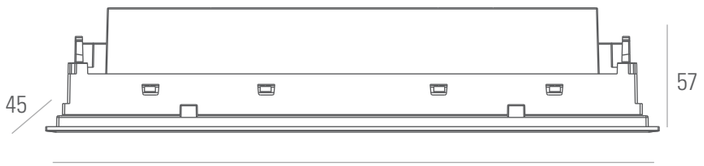


220-240V 50-60Hz | IP20 | CREE LED | CRI >80 | DIMMABLE **DALI/1-10V** *Optional*

15° 30° 45°









PIXEL GRID 10

COLOR TEMP.	POWER	LUMENS	CODE
2700K	10 x 2 W	1640 lm	INT08057-27K
3000K		1700 lm	INT08057-30K
4000K		1780 lm	INT08057-40K

PIXEL GRID 15

COLOR TEMP.	POWER	LUMENS	CODE
2700K	15 x 2 W	2460 lm	INT08060-27K
3000K		2550 lm	INT08060-30K
4000K		2670 lm	INT08060-40K

2700K 3000K 4000K

Features



GRID 10 GRID 15

Similar Products » PIXEL GRID



GRID 1 GRID 2 GRID 5 GRID 10 GRID 15

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING

CEILING RECESSED



PANELS



ACCENTUATION



ADJUSTABLE



WALLWASHER



IP RATED



GENERAL

CEILING MOUNTED



CEILING MOUNTED

- BLACKMOON - R ADJ. 
- BLACKMOON - S ADJ. 
- MIG - R 
- MIG - S 
- MIRAGE - R 
- MIRAGE - S 
- MODUL 28 - I 
- MODUL 28 - II 
- MODUL 28 - III 
- SHUTTLE ADJ. 


BLACKMOON 10 R ADJ.


p.94




220-240V 50-60Hz | IP20 | UGR <19 | CRI >80/>90/>97 | DIMMABLE **1-10V/DALI** *Optional*

24° 40° 60°









COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	10 W	90+	886 lm	INT03088-27K
3000K			900 lm	INT03088-30K
4000K			927 lm	INT03088-40K

2700K 3000K 4000K 5000K

Features



FINISH

Body: *White (WH) - Black (BK) - Gold (GD)*

Reflector: *High Gloss Black (HGB) - High Gloss Silver (HGS) - Frosted (FS) - White (WH) - Gold (GD)*



BLACKMOON 10 FIXED
INT02030

OPTIONAL


BK-FS


WH-HGS


BK-GD


BK-WH


BK-HGS


WH-GD


WH-WH

Similar Products » BLACKMOON


BLACKMOON 10-R ADJ.


BLACKMOON 14-R ADJ.


BLACKMOON 10 - II


BLACKMOON 14 - II

Next...


BLACKMOON 14 R ADJ.


p.95




220-240V 50-60Hz	IP20	UGR <19	CRI >80/>90/>97	CITIZEN LED CLU028-1204	DIMMABLE **1-10V/DALI** *Optional*

24° 40° 60°









COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	14 W	90+	1280 lm	INT06029-27K
3000K			1300 lm	INT06029-30K
4000K			1350 lm	INT06029-40K

2700K 3000K 4000K 5000K



BLACKMOON 14
INT02034
OPTIONAL

FINISH

Body: *White (WH) - Black (BK) - Gold (GD)*

Reflector: *High Gloss Black (HGB) - High Gloss Silver (HGS) - Frosted (FS) - White (WH) - Gold (GD)*



BK-FS WH-HGS BK-GD BK-WH BK-HGS WH-GD WH-WH

Features



Similar Products » BLACKMOON




BLACKMOON 10-R ADJ. | BLACKMOON 14-R ADJ. | BLACKMOON 10 - II | BLACKMOON 14 - II

Next...


BLACKMOON 10-II


p.96

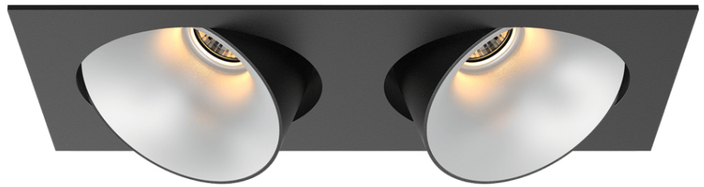

220-240V 50-60Hz | IP20 | UGR <19 | CRI >80/>90/>97 | CITIZEN LED CLU028-1202 | DIMMABLE **1-10V/DALI** *Optional*

24º 40º 60º







COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	2 x 10 W	90+	2 x 886 lm	INT03095-27K
3000K			2 x 900 lm	INT03095-30K
4000K			2 x 927 lm	INT03095-40K

2700K 3000K 4000K 5000K

FINISH

Body: *White (WH) - Black (BK) - Gold (GD)*

Reflector: *High Gloss Black (HGB) - High Gloss Silver (HGS) - Frosted (FS) - White (WH) - Gold (GD)*



BK-FS | WH-HGS | BK-GD | BK-WH | BK-HGS | WH-GD | WH-WH

Features





BLACKMOON 10 - S
INT03090

OPTIONAL

Similar Products » BLACKMOON




BLACKMOON 10-R ADJ. | **BLACKMOON 14-R ADJ.** | **BLACKMOON 10 - II** | **BLACKMOON 14 - II**

Next...

BLACKMOON 14-II


p.97


SWITCH MADE LED SOLUTIONS

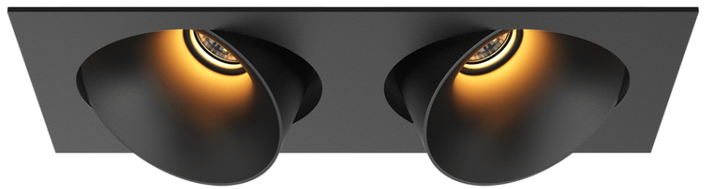


220-240V 50-60Hz | IP20 | UGR <19 | CRI >80/>90/>97 | CITIZEN LED CLU028-1204 | DIMMABLE **1-10V/DALI** *Optional*

24° 40°









COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	2 x 14 W	90+	2 x 1280 lm	INT03096-27K
3000K			2 x 1300 lm	INT03096-30K
4000K			2 x 1350 lm	INT03096-40K

2700K 3000K 4000K 5000K

FINISH

Body: *White (WH) - Black (BK) - Gold (GD)*

Reflector: *High Gloss Black (HGB) - High Gloss Silver (HGS) - Frosted (FS) - White (WH) - Gold (GD)*



BK-FS | WH-HGS | BK-GD | BK-WH | BK-HGS | WH-GD | WH-WH

Features





BLACKMOON 14 - S
INT03091
OPTIONAL

Similar Products » BLACKMOON



BLACKMOON 10-R ADJ. | BLACKMOON 14-R ADJ. | BLACKMOON 10 - II | BLACKMOON 14 - II

Next...


MIG 1 R

p.98



220-240V 50-60Hz | IP43 | 90 lm/W | CITIZEN 1204 | CRI >80/>90/>97 | DIMMABLE **DALI/1-10V** *Optional*

24° 42°

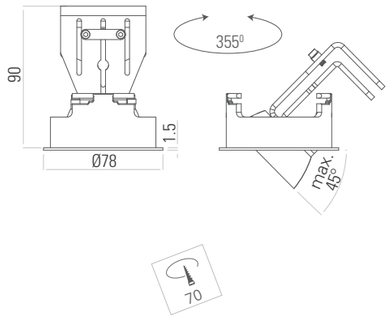

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	10 W	90+	680 lm	INT06040-27K
3000K			760 lm	INT06040-30K
4000K			850 lm	INT06040-40K

2700K 3000K 4000K 5000K

Features



OPTIC CHOICES



Code: **OL**
Optic lens for more uniform lighting effect

Similar Products » MIG



MIG 1 - R | MIG 1 - S | MIG 2 - S | MIG 3 - S

Next...


MIG 1 S

p.99



220-240V 50-60Hz | IP43 | 90 lm/W | CITIZEN 1204 | CRI >80/>90/>97 | DIMMABLE **DALI/1-10V** *Optional*

24° 42°

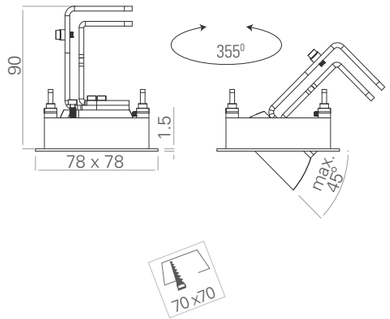

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	10 W	90+	680 lm	INT06043-27K
3000K			760 lm	INT06043-30K
4000K			850 lm	INT06043-40K

2700K 3000K 4000K 5000K

Features



OPTIC CHOICES



Code: **OL**
Optic lens for more uniform lighting effect

Similar Products » MIG



MIG 1 - R | MIG 1 - S | MIG 2 - S | MIG 3 - S

Next...

MIG 2 S


p.100

SWITCH MADE LED SOLUTIONS



220-240V 50-60Hz | IP43 | 90 lm/W | CITIZEN 1204 | CRI >80/>90/>97 | DIMMABLE **DALI/1-10V** *Optional*

24° 42°

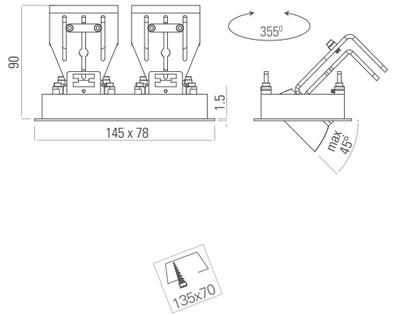

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	2 x 10 W	90+	1360 lm	INT06046-27K
3000K			1520 lm	INT06046-30K
4000K			1700 lm	INT06046-40K

2700K 3000K 4000K 5000K

Features



OPTIC CHOICES



Code: **OL**
Optic lens for more uniform lighting effect

Similar Products » MIG



MIG 1 - R | MIG 1 - S | MIG 2 - S | MIG 3 - S

Next...


MIG 3 S

p.101



220-240V 50-60Hz | IP43 | 90 lm/W | CITIZEN 1204 | CRI >80/>90/>97 | DIMMABLE **DALI/1-10V** *Optional*

24° 42°

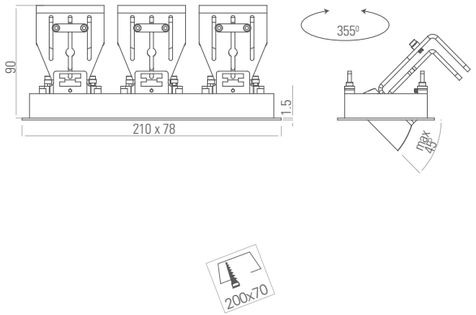

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	3 x 10 W	90+	2040 lm	INT06050-27K
3000K			2280 lm	INT06050-30K
4000K			2550 lm	INT06050-40K

2700K 3000K 4000K 5000K

Features



OPTIC CHOICES



Code: **OL**
Optic lens for more uniform lighting effect

Similar Products » MIG



MIG 1 - R | MIG 1 - S | MIG 2 - S | MIG 3 - S

Next...

MIRAGE 1 R


p.102

SWITCH MADE LED SOLUTIONS




220-240V 50-60Hz	IP43	100 lm/W	CITIZEN 1208 COB LED	CRI >80/>90/>97	DIMMABLE **DALI/1-10V** *Optional*

24° 36° 45°

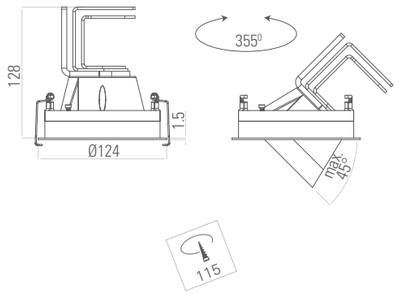

2700K 3000K 4000K 5000K

Features



MIRAGE 1-20 R

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	20 W	90+	1826 lm	INT06080-27K
3000K			1858 lm	INT06080-30K
4000K			1880 lm	INT06080-40K

MIRAGE 1-28 R

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	28 W	90+	2310 lm	INT06083-27K
3000K			2500 lm	INT06083-30K
4000K			2600 lm	INT06083-40K

Similar Products » MIRAGE



MIRAGE 1 - 20/28 R | MIRAGE 1 - 20/28 S | MIRAGE 2 - 20/28 S

Next...



MIRAGE 1 S


p.103

SWITCH MADE LED SOLUTIONS




220-240V 50-60Hz	IP43	100 lm/W	CITIZEN 1208 COB LED	CRI >80/>90/>97	DIMMABLE **DALI/1-10V** *Optional*

24° 36° 45°

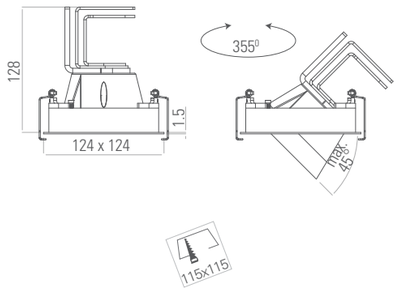

2700K 3000K 4000K 5000K

Features



MIRAGE 1-20 S

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	20 W	90+	1826 lm	INT08030-27K
3000K			1858 lm	INT08030-30K
4000K			1880 lm	INT08030-40K

MIRAGE 1-28 S

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	28 W	90+	2310 lm	INT08033-27K
3000K			2500 lm	INT08033-30K
4000K			2620 lm	INT08033-40K

Similar Products » MIRAGE



MIRAGE 1 - 20/28 R | MIRAGE 1 - 20/28 S | MIRAGE 2 - 20/28 S

Next...



MIRAGE 2 S


p.104

SWITCH MADE LED SOLUTIONS



220-240V 50-60Hz | IP43 | 100 lm/W | CITIZEN 1208 COB LED | CRI >80/>90/>97 | DIMMABLE **DALI/1-10V** *Optional*

24° 36° 45°

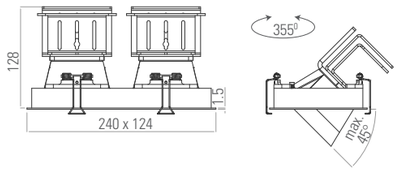



2700K 3000K 4000K 5000K

Features



MIRAGE 2-20 S

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	2 x 20 W	90+	3652 lm	INT08036-27K
3000K			3716 lm	INT08036-30K
4000K			3960 lm	INT08036-40K

MIRAGE 2-28 S


COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	2 x 28 W	90+	4620 lm	INT08039-27K
3000K			5000 lm	INT08039-30K
4000K			5240 lm	INT08039-40K

Similar Products » MIRAGE



MIRAGE 1 - 20/28 R | MIRAGE 1 - 20/28 S | MIRAGE 2 - 20/28 S

Next...

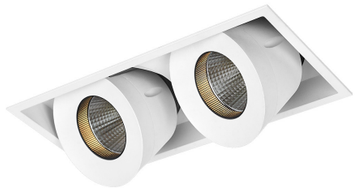


MODUL 28-I

p.105



220-240V 50-60Hz | IP43 | 100 lm/W | CITIZEN 1208 COB LED | CRI >80/>90/>97 | DIMMABLE **DALI/1-10V** *Optional*

32° 50°

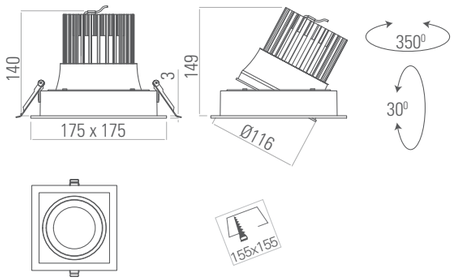

MODUL 28-I

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	28 W	90+	2500 lm	INT04389-27K
3000K			2680 lm	INT04389-30K
4000K			2790 lm	INT04389-40K

2700K 3000K 4000K 5000K



Features

Similar Products » MODUL



MODUL 28 - I | MODUL 28 - II | MODUL 28 - III

Next...

MODUL 28-II


p.106

SWITCH MADE LED SOLUTIONS



220-240V 50-60Hz | IP43 | 100 lm/W | CITIZEN 1208 COB LED | CRI >80/>90/>97 | DIMMABLE **DALI/1-10V** *Optional*

32° 50°

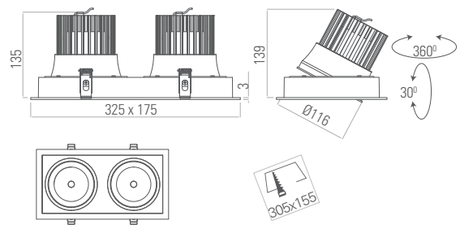


MODUL 28-II

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	2 x 28 W	90+	5000 lm	INT04392-27K
3000K			5360 lm	INT04392-30K
4000K			5580 lm	INT04392-40K

2700K 3000K 4000K 5000K

Features



Similar Products » MODUL



MODUL 28 - I | MODUL 28 - II | MODUL 28 - III

Next...

MODUL 28-III


p.107

SWITCH MADE LED SOLUTIONS



220-240V 50-60Hz | IP43 | 100 lm/W | CITIZEN 1208 COB LED | CRI >80/>90/>97 | DIMMABLE **DALI/1-10V** *Optional*

32° 50°

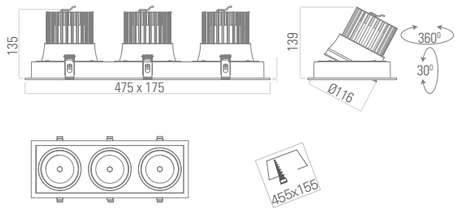


MODUL 28-III

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	3 x 28 W	90+	7500 lm	INT04395-27K
3000K			8040 lm	INT04395-30K
4000K			8370 lm	INT04395-40K

2700K 3000K 4000K 5000K

Features



Similar Products » MODUL



MODUL 28 - I | MODUL 28 - II | MODUL 28 - III

Next...

SHUTTLE ADJUSTABLE

p.108



230 Vac | CREE COB LED | IP44 | CRI >80 | DIMMABLE **DALI/0-10V** *Optional*

15° 24° 38°

2700K 3000K 4000K 5000K


Features








SHUTTLE FIXED

OPTIONAL







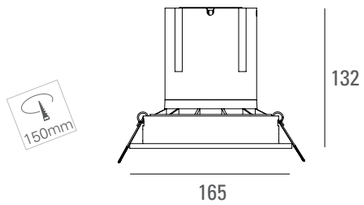

SHUTTLE 12 ADJUSTABLE

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	12 W	80+	1060 lm	INT20005-27K
3000K			1100 lm	INT20005-30K
4000K			1140 lm	INT20005-40K

SHUTTLE 20 ADJUSTABLE

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	20 W	80+	1780 lm	INT20007-27K
3000K			1880 lm	INT20007-30K
4000K			1920 lm	INT20007-40K

SHUTTLE 30 ADJUSTABLE

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	30 W	80+	2670 lm	INT20009-27K
3000K			2760 lm	INT20009-30K
4000K			2880 lm	INT20009-40K

SHUTTLE 40 ADJUSTABLE

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	40 W	80+	3520lm	INT20011-27K
3000K			3720 lm	INT20011-30K
4000K			3840 lm	INT20011-40K

Similar Products » SHUTTLE ADJUSTABLE



BLACKMOON-R ADJ. | MIG - S | MIRAGE S | MODUL 28 - I | SHUTTLE ADJ.

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING

CEILING RECESSED



PANELS | ACCENTUATION | ADJUSTABLE



WALLWASHER | IP RATED | GENERAL

- ROTOR

CEILING MOUNTED



CEILING MOUNTED

ROTOR


p.110



230 Vac | IP20 | CITIZEN COB LED | CRI >80 | DIMMABLE **DALI/0-10V** *Optional*


15º 24º — ROTOR 10

15º 24º 36º 60º — ROTOR 15



ROTOR 10

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	10 W	80+	720 lm	INT20139-27K
3000K			750 lm	INT20139-30K
4000K			800 lm	INT20139-40K

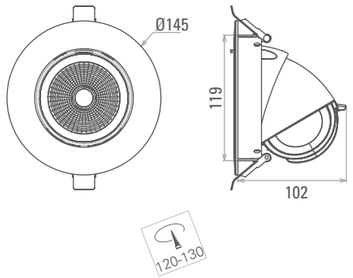

ROTOR 15

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	15 W	80+	1580 lm	INT04465-27K
3000K			1660 lm	INT04465-30K
4000K			1780 lm	INT04465-40K





2700K 3000K 4000K 5000K

Features


ROTOR 10


ROTOR 15

Similar CATEGORY


ROTOR

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING

CEILING RECESSED



PANELS



ACCENTUATION



ADJUSTABLE



WALLWASHER



IP RATED



GENERAL

- STILLA 
- PICOLO 
- IPIL 
- SWIMO 

CEILING MOUNTED



CEILING MOUNTED

www.switch-made.com


STILLA

p.112



700mA | IP65 | IK07 | CRI >82 | LUMILEDS LED

12º 24º 36º



STILLA 2

COLOR TEMP.	POWER	LUMENS	CODE
2700K	2 W	140 lm	INT03042-27K
3000K		150 lm	INT03042-30K
4000K		165 lm	INT03042-40K

2700K 3000K 4000K

Features

Trim: *White (WH), Black (BK)*

Reflector: *White (WH), Black (BK), Gold (GD)*



WH-BK | WH-WH | WH-GD | BK-GD

Similar Products » STILLA



STILLA 2 | STILLA 3 | STILLA 7 | STILLA 10


STILLA

p.113




IK07


CRI >90




STILLA 3 | STILLA 7 / 10

2700K 3000K 4000K 5000K







STILLA 3

LUMINUS V6 LED | IP65 | **350mA CC** Remote Driver

COLOR TEMP.	POWER	LUMENS	CODE
2700K	3 W	256 lm	INT03045-27K
3000K		264 lm	INT03045-30K
4000K		278 lm	INT03045-40K

STILLA 7

CITIZEN COB LED | IP65 | **350mA CC** Remote Driver

COLOR TEMP.	POWER	LUMENS	CODE
2700K	7 W	420 lm	INT03048-27K
3000K		446 lm	INT03048-30K
4000K		500 lm	INT03048-40K

STILLA 10

CITIZEN COB LED | IP54 | **500mA CC** Remote Driver


COLOR TEMP.	POWER	LUMENS	CODE
2700K	10 W	720 lm	INT03052-27K
3000K		750 lm	INT03052-30K
4000K		800 lm	INT03052-40K

Features



STILLA 3 | STILLA 7 | STILLA 10

Similar Products » STILLA

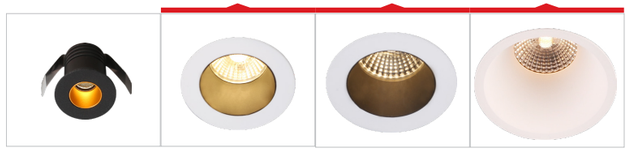

STILLA 2 | STILLA 3 | STILLA 7 | STILLA 10

Next...

PICOLO


p.114





230 Vac | IP54 | PF >0.9 | CRI >80/>90

24° 36° 60°

2700K 3000K 4000K 5000K





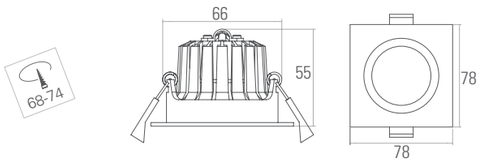

PICOLO 8 ROUND

COLOR TEMP.	POWER	LUMENS	CODE
3000K	8 W	600 lm	INT04421-30K
4000K		650 lm	INT04421-40K
5000K		680 lm	INT04421-50K

PICOLO 8 ADJUSTABLE

COLOR TEMP.	POWER	LUMENS	CODE
3000K	8 W	600 lm	INT04437-30K
4000K		650 lm	INT04437-40K
5000K		680 lm	INT04437-50K

PICOLO 8 SQUARE

COLOR TEMP.	POWER	LUMENS	CODE
3000K	8 W	600 lm	INT04431-30K
4000K		650 lm	INT04431-40K
5000K		680 lm	INT04431-50K

Features



ROUND ADJUSTABLE SQUARE

Similar » CATEGORY



STILLA PICOLO IPIL SWIMO

IPIL


p.115

SWITCH MADE LED SOLUTIONS




230 Vac | IP65 | PF >0.9 | CRI >80/>90 | CREE COB LED | 30°

2700K 3000K 4000K 5000K







IPIL 10

CREE CXA1507

COLOR TEMP.	POWER	LUMENS	CODE
3000K	10 W	850 lm	INT04451-30K
4000K		900 lm	INT04451-40K
5000K		950 lm	INT04451-50K

IPIL 15

CREE CXA1512

COLOR TEMP.	POWER	LUMENS	CODE
3000K	15 W	1320 lm	INT04454-30K
4000K		1350 lm	INT04454-40K
5000K		1425 lm	INT04454-50K

IPIL 20

CREE CXA1816

COLOR TEMP.	POWER	LUMENS	CODE
3000K	20 W	1760 lm	INT04457-30K
4000K		1800 lm	INT04457-40K
5000K		1900 lm	INT04457-50K

Features



IPIL 10 IPIL 15 IPIL 20


Similar » CATEGORY



STILLA PICOLO IPIL SWIMO

SWIMO

p.116

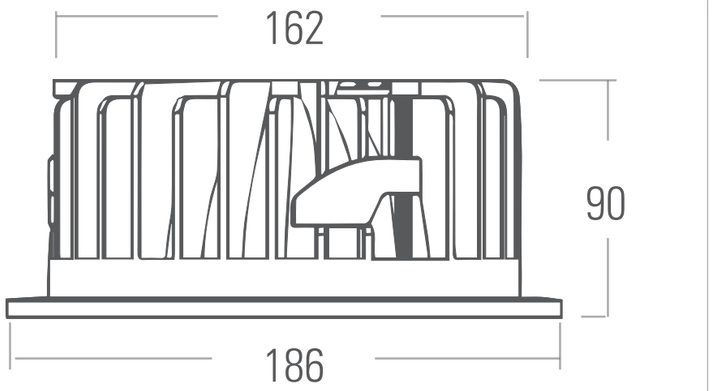

230 Vac | IP65 | SMD LED 2835 | CRI >80 | DIMMABLE **DALI/1-10V** *Optional*

80°




SWIMO 9

COLOR TEMP.	POWER	LUMENS	CODE
3000K	9 W	800 lm	INT05118-30K
4000K		828 lm	INT05118-40K
5000K		864 lm	INT05118-50K



SWIMO 15

COLOR TEMP.	POWER	LUMENS	CODE
3000K	15 W	1335 lm	INT05121-30K
4000K		1380 lm	INT05121-40K
5000K		1440 lm	INT05121-50K

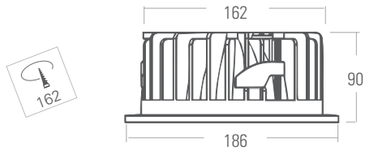

SWIMO 22

COLOR TEMP.	POWER	LUMENS	CODE
3000K	22 W	1958 lm	INT05125-30K
4000K		2040 lm	INT05125-40K
5000K		2110 lm	INT05125-50K

2700K 3000K 4000K 5000K

Features



SWIMO 9 SWIMO 15 SWIMO 22

Similar » CATEGORY



STILLA PICOLO IPIL SWIMO

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING

CEILING RECESSED



PANELS



ACCENTUATION



ADJUSTABLE



WALLWASHER



IP RATED



GENERAL

- ERA 
- AERO 
- POP 
- JUPY - X 

CEILING MOUNTED



CEILING MOUNTED

www.switch-made.com


ERA


p.118



220-240 Vac | IP44 | IK04 | CRI > 80 | PHILIPS CERTAFLUX 1201 | DIMMABLE **0-10V/DALI**

36° 60°





ERA 213 - 40W
INT20030

OPTIONAL

2700K 3000K 4000K 5000K

Features





ERA 84

75

COLOR TEMP.	DIMENSION (MM)	POWER	LUMENS	CODE
3000K	84 W x 34 H	7 W	740 lm	INT20026-30K
4000K			824 lm	INT20026-40K

ERA 105

95

COLOR TEMP.	DIMENSION (MM)	POWER	LUMENS	CODE
3000K	105 W x 42 H	15 W	1630 lm	INT20027-30K
4000K			1815 lm	INT20027-40K

ERA 136

125

COLOR TEMP.	DIMENSION (MM)	POWER	LUMENS	CODE
3000K	136 W x 50 H	20 W	2140 lm	INT20028-30K
4000K			2380 lm	INT20028-40K

ERA 162

150mm

COLOR TEMP.	DIMENSION (MM)	POWER	LUMENS	CODE
3000K	162 W x 58 H	30 W	2950 lm	INT20029-30K
4000K			3270 lm	INT20029-40K

FINISH

Trim: *White (WH)* *Black (BK)*

Reflector: *High Gloss Chrome (HGC)*

Similar » CATEGORY


ERA


AERO


POP


JUPY - X

AERO

p.119



2700K 3000K 4000K 5000K

Features




AERO 35 AERO 50 AERO 60 AERO 80


Similar CATEGORY





ERA AERO POP JUPY - X


230 Vac | IP20 | CREE COB LED | CRI > 80/>90 | <3SDCM | DIMMABLE **0-10V/DALI**









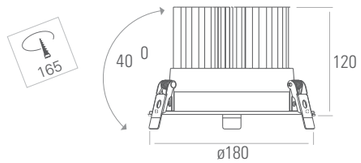

AERO 35

CREE 1507 LED

COLOR TEMP.	POWER	LUMENS	CODE
3000K	35 W	2900 lm	INT05128-30K
4000K		3152 lm	INT05128-40K
5000K		3300 lm	INT05128-40K

AERO 50

CREE 1512 LED

COLOR TEMP.	POWER	LUMENS	CODE
3000K	50 W	4386 lm	INT05131-30K
4000K		4525 lm	INT05131-40K
5000K		4750 lm	INT05131-50K

AERO 60

CREE 1507 LED

COLOR TEMP.	POWER	LUMENS	CODE
3000K	60 W	5144 lm	INT05134-30K
4000K		5415 lm	INT05134-40K
5000K		5700 lm	INT05134-50K

AERO 80

CREE 1512 LED

COLOR TEMP.	POWER	LUMENS	CODE
3000K	80 W	6500 lm	INT05137-30K
4000K		6840 lm	INT05137-40K
5000K		7200 lm	INT05137-50K

POP

p.120



220-230 Vac | IP40 | UGR <19 | IK07 | CRI >80 | SMD LED | DIMMABLE **1-10V** | 90°

2700K 3000K 4000K 5000K

Features


GLOSSY SILVER REFLECTOR


MATTE SILVER REFLECTOR



Similar CATEGORY




ERA | AERO | POP | JUPY - X




POP 15

COLOR TEMP.	POWER	LUMENS	CODE
3000K	15 W	1290 lm	INT05140-30K
4000K		1350 lm	INT05140-40K
5000K		1400 lm	INT05140-50K



POP 30

COLOR TEMP.	POWER	LUMENS	CODE
3000K	30 W	2600 lm	INT05143-30K
4000K		2700 lm	INT05143-40K
5000K		2850 lm	INT05143-50K



POP 40

COLOR TEMP.	POWER	LUMENS	CODE
3000K	40 W	3540 lm	INT05146-30K
4000K		3600 lm	INT05146-40K
5000K		3780 lm	INT05146-50K

JUPY-X

p.121



220-230 Vac | IP44 | IK06 | CRI >80 | COB LED | DIMMABLE **1-10V/DALI**

60°


2700K 3000K 4000K 5000K

Features

Similar » CATEGORY




ERA | AERO | POP | JUPY - X




JUPY-X 10

COLOR TEMP.	POWER	LUMENS	CODE
3000K	10 W	855 lm	INT05148-30K
4000K		953 lm	INT05148-40K
5000K		1050 lm	INT05148-50K



JUPY-X 22

COLOR TEMP.	POWER	LUMENS	CODE
3000K	22 W	1950 lm	INT05151-30K
4000K		2042 lm	INT05151-40K
5000K		2150 lm	INT05151-50K



JUPY-X 30

COLOR TEMP.	POWER	LUMENS	CODE
3000K	30 W	2800 lm	INT05154-30K
4000K		2970 lm	INT05154-40K
5000K		3080 lm	INT05154-50K

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM


INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING


CEILING RECESSED



PANELS



ACCENTUATION



ADJUSTABLE



WALLWASHER



IP RATED



GENERAL

CEILING MOUNTED




CEILING MOUNTED

- CELESTIA 
- BLACKMOON CELING MOUNTED 
- TRIO 
- ECLIPSE 
- BETA CELING MOUNTED 
- ZETA CELING MOUNTED 

www.switch-made.com

CELESTIA

p.123

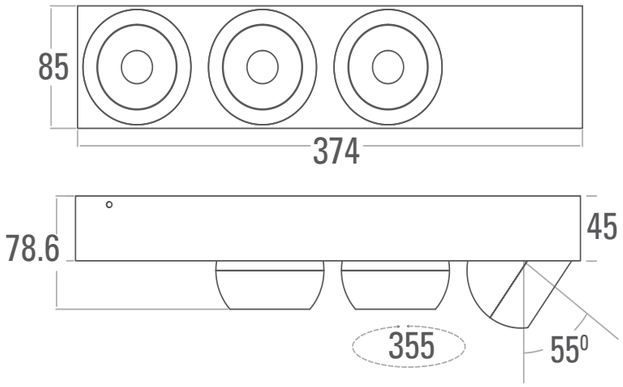

2700K 3000K 4000K

Features



Similar Products » CELESTIA



220-240V | IP43 | BRIDGELUX LED | CRI >90 | DIMMABLE **DALI/1-10V** *Optional*

24⁰ 40⁰ 60⁰


CELESTIA Family


RECESSED


SURFACE



SUSPENDED


TRACK




CELESTIA 80 SS SURFACE

COLOR TEMP.	POWER	LUMENS	CODE
2700K	12 W	824 lm	INT20118-27K
3000K		942 lm	INT20118-30K
4000K		1017 lm	INT20118-40K



CELESTIA 80 SD SURFACE

COLOR TEMP.	POWER	LUMENS	CODE
2700K	2 x 12 W	1648 lm	INT20119-27K
3000K		1884 lm	INT20119-30K
4000K		2034 lm	INT20119-40K



CELESTIA 80 ST SURFACE

COLOR TEMP.	POWER	LUMENS	CODE
2700K	3 x 12 W	2475 lm	INT20105-27K
3000K		2826 lm	INT20105-30K
4000K		3050 lm	INT20105-40K

CELESTIA

p.124

SWITCH MADE LED SOLUTIONS



2700K 3000K 4000K

Features


100 FC SURFACE


130 FC SURFACE



Similar Products » CELESTIA



CELESTIA SS | CELESTIA SD | CELESTIA ST | CELESTIA 100 FC | CELESTIA 130 FC

220-240V | IP43 | BRIDGELUX LED | CRI >90 | DIMMABLE **DALI/1-10V** *Optional*


CELESTIA Family



RECESSED


SURFACE



SUSPENDED


TRACK





CELESTIA 100 FC SURFACE




COLOR TEMP.	POWER	LUMENS	CODE
2700K	15 W	1124 lm	INT20125-27K
3000K		1284 lm	INT20125-30K
4000K		1364 lm	INT20125-40K




CELESTIA 100 FC SURFACE 90D
INT20126
OPTIONAL

CELESTIA 130 FC SURFACE



COLOR TEMP.	POWER	LUMENS	CODE
2700K	21 W	1605 lm	INT20132-27K
3000K		1798 lm	INT20132-30K
4000K		1926 lm	INT20132-40K



CELESTIA 130 FC SURFACE 90D
INT20133
OPTIONAL

Next...

BLACKMOON-R
CEILING MOUNTED

p.125

SWITCH MADE LED SOLUTIONS



220-240V 50-60Hz | IP20 | UGR <19 | CRI >80/>90/>97

24° 40° 60°

2700K 3000K 4000K 5000K

Features


BM 8 - R


BM 10 - R


BM 14 - R

Similar PRODUCTS



BLACKMOON - R | BLACKMOON - S | BLACKMOON II - S


BLACKMOON Family



TRACK


SUSPENDED


CEILING RECESSED







FINISH

BLACKMOON 8 R CEILING MOUNTED

CITIZEN 1202 LED

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	8 W	90+	704 lm	INT03100-27K
3000K			712 lm	INT03100-30K
4000K			740 lm	INT03100-40K

BLACKMOON 10 R CEILING MOUNTED

CITIZEN 1204 LED

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	10 W	90+	886 lm	INT03101-27K
3000K			900 lm	INT03101-30K
4000K			927 lm	INT03101-40K

BLACKMOON 14 R CEILING MOUNTED

CITIZEN 1202 LED

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	14 W	90+	1280 lm	INT03102-27K
3000K			1300 lm	INT03102-30K
4000K			1350 lm	INT03102-40K


Body: *White (WH) - Black (BK) - Gold (GD)*

Reflector: *High Gloss Black (HGB) - High Gloss Silver (HGS) - Frosted (FS) - White (WH) - Gold (GD)*

BLACKMOON-S
CEILING MOUNTED

p.126

SWITCH MADE LED SOLUTIONS

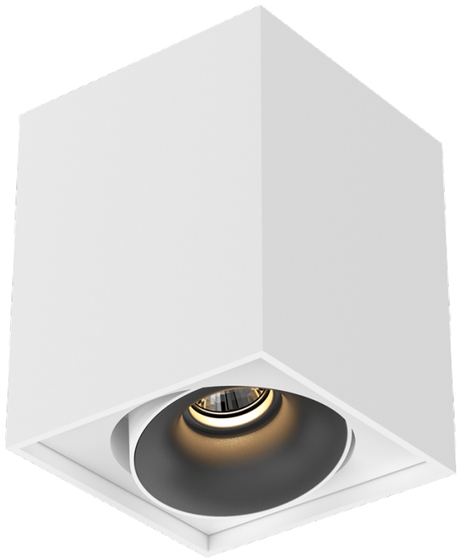

220-240V 50-60Hz | IP20 | UGR <19 | CRI >80/>90/>97 | CITIZEN 1202 LED | DIMMABLE **1-10V/DALI** *Optional*

24º 40º 60º

2700K 3000K 4000K 5000K

Features

BM 8 - S BM 10 - S

Similar PRODUCTS



BLACKMOON - R | BLACKMOON - S | BLACKMOON II - S

BLACKMOON Family




TRACK




SUSPENDED



CEILING RECESSED





FINISH

BLACKMOON 8 S CEILING MOUNTED

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	8 W	90+	704 lm	INT03103-27K
3000K			712 lm	INT03103-30K
4000K			740 lm	INT03103-40K

BLACKMOON 10 S CEILING MOUNTED

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	10 W	90+	886 lm	INT03104-27K
3000K			900 lm	INT03104-30K
4000K			927 lm	INT03104-40K


Body: *White (WH) - Black (BK)*

Reflector: *High Gloss Black (HGB) - High Gloss Silver (HGS) - Frosted (FS) - White (WH)*

BLACKMOON II-S
CEILING MOUNTED

p.127

SWITCH MADE LED SOLUTIONS

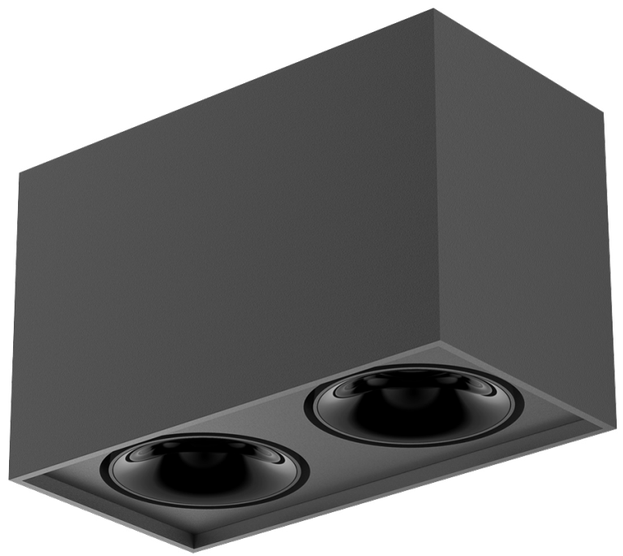

2700K 3000K 4000K 5000K


220-240V 50-60Hz | IP20 | UGR <19 | CRI >80/>90/>97 | CITIZEN LED CLU028-1204 | DIMMABLE **1-10V/DALI** *Optional*

24º 40º 60º

BLACKMOON Family




TRACK





SUSPENDED





CEILING RECESSED

BLACKMOON 8 II-S CEILING MOUNTED

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	2 x 8 W	90+	2 x 704 lm	INT03106-27K
3000K			2 x 712 lm	INT03106-30K
4000K			2 x 740 lm	INT03106-40K

BLACKMOON 10 II-S CEILING MOUNTED


COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	2 x 10 W	90+	2 x 886 lm	INT03107-27K
3000K			2 x 900 lm	INT03107-30K
4000K			2 x 927 lm	INT03107-40K

FINISH

Body: *White (WH) - Black (BK) - Gold (GD)*

Reflector: *High Gloss Black (HGB) - High Gloss Silver (HGS) - Frosted (FS) - White (WH) - Gold (GD)*

Features



BM 14 - S

Similar PRODUCTS



BLACKMOON - R | BLACKMOON - S | BLACKMOON II - S

Next...

TRIO

p.128



100-240 Vac | IP54 | IK08 | CRI >80 | PF >0.9 | DIMMABLE **TRIAC** Optional | 120°

Daylight illuminance <10 lx, 30 sec

Sensor 140° 5~7m 30 sec

Emergency 3hrs battery back-up

For TRIO 12 / TRIO 25



TRIO 12

COLOR TEMP.	POWER	LUMENS	CODE
3000K	12 W	1080 lm	INT06024-30K
4000K		1180 lm	INT06024-40K
5700K		1260 lm	INT06024-57K



TRIO 25

COLOR TEMP.	POWER	LUMENS	CODE
3000K	25 W	2300 lm	INT06021-30K
4000K		2450 lm	INT06021-40K
5700K		2575 lm	INT06021-27K



TRIO 30

COLOR TEMP.	POWER	LUMENS	CODE
3000K	30 W	2760 lm	INT06027-30K
4000K		2900 lm	INT06027-40K
5700K		3090 lm	INT06027-57K

*Please consult us for **DAYLIGHT, MICROWAVE SENSOR** and **EMERGENCY** options*

Features



TRIO 12 TRIO 25 TRIO 30

Similar » CATEGORY




CELESTIA SS | CELESTIA FC | BLACKMOON | TRIO | ECLIPSE | BETA | ZETA

ECLIPSE

p.129


SWITCH MADE LED SOLUTIONS

200-240 Vac | IP40 | UGR 19 | IK06 | CRI >80 | DIMMABLE **TRIAC** | 120°

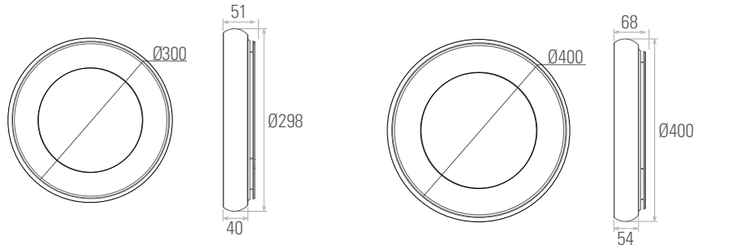

ECLIPSE SURFACE MOUNTED 300

ECLIPSE SURFACE MOUNTED 400

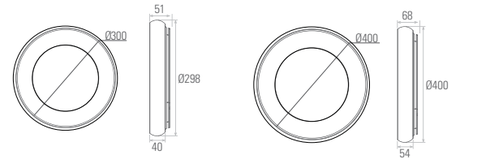

ECLIPSE SURFACE MOUNTED 300

ECLIPSE SURFACE MOUNTED 400

ECLIPSE SURFACE MOUNTED

COLOR TEMP.	POWER	DIA.	LUMENS	CODE
4000K	25 W	300	1900 lm	INT01201-40K
5700K			2000 lm	INT01201-57K
4000K	35 W	400	3220 lm	INT01205-40K
5700K			3290 lm	INT01205-57K


3000K 4000K 5000K 5700K

Features




SURFACE MOUNTED

SUSPENDED



ECLIPSE SUSPENDED 300



ECLIPSE SUSPENDED 400

ECLIPSE SUSPENDED

COLOR TEMP.	POWER	DIA.	LUMENS	CODE
4000K	25 W	300	1900 lm	INT01208-40K
5700K			2000 lm	INT01208-57K
4000K	35 W	400	3220 lm	INT01211-40K
5700K			3290 lm	INT01211-57K

Similar >> CATEGORY



CELESTIA SS | CELESTIA FC | BLACKMOON | TRIO | ECLIPSE | BETA | ZETA

BETA CEILING MOUNTED

p.130

SWITCH MADE LED SOLUTIONS



100-240 Vac | IP20 | <3SDCM | CRI >80 | CREE COB LED

15º 30º 45º

REFLECTOR FINISH

Gold | High Gloss Black | High Gloss Silver | Frosted

2700K 3000K 4000K 5000K

Features



BETA 8 BETA 15 BETA 20


BETA Family





TRACK



SUSPENDED







BETA 8 CEILING MOUNTED

CREE 1507 LED

COLOR TEMP.	POWER	LUMENS	CODE
2700K	8 W	680 lm	INT07316-27K
3000K		712 lm	INT07316-30K
4000K		744 lm	INT07316-40K

BETA 15 CEILING MOUNTED

CREE 1512 LED

COLOR TEMP.	POWER	LUMENS	CODE
2700K	15 W	1275 lm	INT07319-27K
3000K		1335 lm	INT07319-30K
4000K		1400 lm	INT07319-40K

BETA 20 CEILING MOUNTED

CREE 1512 LED

COLOR TEMP.	POWER	LUMENS	CODE
2700K	20 W	1720 lm	INT07322-27K
3000K		1800 lm	INT07322-30K
4000K		1860 lm	INT07322-40K

Similar CATEGORY



CELESTIA SS | CELESTIA FC | BLACKMOON | TRIO | ECLIPSE | BETA | ZETA

ZETA CEILING MOUNTED

p.131



100-240 Vac | IP20 | IK06 | CRI >80/ >90 | 105lm/W | LUMINUS COB LED | DIMMABLE **TRIAC**

15º 18º 24º 38º

2700K 3000K 4000K 5000K

Features



ZETA 20 | ZETA 30 | ZETA II (Optional)

ZETA Family




TRACK




SUSPENDED



WALL MOUNTED





ZETA 20 CEILING MOUNTED

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	20 W	80+	2020 lm	INT07310-27K
3000K			2120 lm	INT07310-30K
4000K			2180 lm	INT07310-40K

ZETA 30 CEILING MOUNTED

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	30 W	80+	3015 lm	INT07313-27K
3000K			3150 lm	INT07313-30K
4000K			3240 lm	INT07313-40K



ZETA II (OPTIONAL)

Similar » CATEGORY



CELESTIA SS | CELESTIA FC | BLACKMOON | TRIO | ECLIPSE | BETA | ZETA

INDOOR


- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING



WALL RECESSED



WALL MOUNTED

- MUIRA - R 
- MUIRA - S 
- PERLE

www.switch-made.com

IROUND-X / ISQUARE-X

p.133




230 Vac | IP65 | CRI >80 | PF >0.9 | 120°

2700K 3000K 4000K 5000K


Features

IROUND-X ISQUARE-X



IROUND-X


COLOR TEMP.	POWER	LUMENS	CODE
3000K	1.2 W	80 lm	EXT03071-30K



ISQUARE-X

COLOR TEMP.	POWER	LUMENS	CODE
3000K	1.2 W	80 lm	EXT03074-30K

Similar CATEGORY

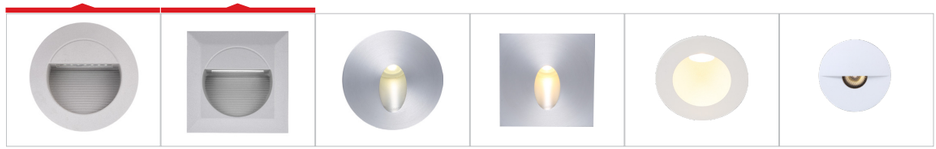

IROUND-X | ISQUARE-X | MUIRA - R | MUIRA - S | PERLE | MARKI


MUIRA - PERLE - MARKI

p.134




2700K 3000K 4000K

Features



MUIRA - R MUIRA - S PERLE MARKI


Similar » CATEGORY

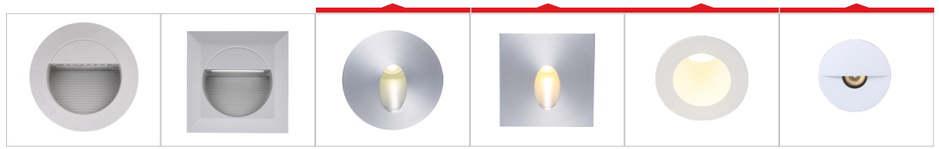



IROUND-X ISQUARE-X MUIRA - R MUIRA - S PERLE MARKI

350 / 700mA | CRI >82 | LUMILEDS LED









MUIRA-R

700mA CC Remote Driver | IP54

COLOR TEMP.	POWER	LUMENS	CODE
2700K	2 W	120 lm	EXT01514-27K
3000K		130 lm	EXT01514-30K

MUIRA-S

700mA CC Remote Driver | IP54

COLOR TEMP.	POWER	LUMENS	CODE
2700K	2 W	120 lm	EXT01516-27K
3000K		130 lm	EXT01516-30K

PERLE

350mA CC Remote Driver | IP54

COLOR TEMP.	POWER	LUMENS	CODE
2700K	1 W	90 lm	EXT01518-27K
3000K		110 lm	EXT01518-30K

MARKI

700mA CC Remote Driver | IP65

COLOR TEMP.	POWER	LUMENS	CODE
2700K	2 W	116 lm	EXT01520-27K
3000K		120 lm	EXT01520-30K

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING

www.switch-made.com



WALL RECESSED



WALL MOUNTED

- ZETA WALL MOUNTED 
- IOTA 
- ALTER 
- SIGMA 
- LINEA 

ZETA WALL MOUNTED

p.136

SWITCH MADE LED SOLUTIONS



100-240 Vac | IP20 | IK06 | CRI >80/>90 | 105lm/W | LUMINUS COB LED | DIMMABLE **TRIAC**

15º 18º 24º 38º

2700K 3000K 4000K 5000K

Features



ZETA 20 | ZETA 30 | ZETA II (Optional)

Similar » CATEGORY



ZETA | IOTA | ALTER 6 | SIGMA | LINEA

ZETA Family




TRACK




SUSPENDED



CEILING MOUNTED





ZETA 20 WALL MOUNTED

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	20 W	80+	2020 lm	INT07327-27K
3000K			2120 lm	INT07327-30K
4000K			2180 lm	INT07327-40K

ZETA 30 WALL MOUNTED

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	30 W	80+	3015 lm	INT07330-27K
3000K			3150 lm	INT07330-30K
4000K			3240 lm	INT07330-40K



ZETA II (OPTIONAL)

IOTA - ALTER - SIGMA

p.137

SWITCH MADE LED SOLUTIONS



220-240 Vac | IK08 | CRI >80 | PF >0.9 | CITIZEN LED

2700K 3000K 4000K

Features





IOTA ALTER SIGMA 1510 SIGMA 1510


Similar CATEGORY




ZETA IOTA ALTER 6 SIGMA LINEA







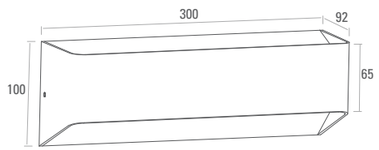

IOTA

IP54

COLOR TEMP.	POWER	LUMENS	CODE
2700K	7 W	420 lm	INT09002-27K
3000K		455 lm	INT09002-30K
4000K		490 lm	INT09002-40K

ALTER 6

IP65

ALTER 12 / ALTER 18 (OPTIONAL)

COLOR TEMP.	POWER	LUMENS	CODE
2700K	2 x 3 W	2 x 105 lm	EXT05070-27K
3000K		2 x 130 lm	EXT05070-30K
4000K		2 x 169 lm	EXT05070-40K

SIGMA 1510

IP54

COLOR TEMP.	POWER	LUMENS	CODE
3000K	10 W	400 lm	INT20138-30K
4000K		500 lm	INT20138-40K
5000K		590 lm	INT20138-50K

SIGMA 3010

IP54

COLOR TEMP.	POWER	LUMENS	CODE
3000K	18 W	820 lm	INT20137-30K
4000K		900 lm	INT20137-40K
5000K		985 lm	INT20137-50K

LINEA

p.138



100-240 Vac | IP44 | IK06 | CRI >80 | PF >0.9 | 120°

3000K 4000K 6000K

Features






Similar CATEGORY




ZETA | IOTA | ALTER 6 | SIGMA | LINEA




LINEA 600

COLOR TEMP.	POWER	LUMENS	CODE
3000K	12 W	795 lm	INT05002-30K
4000K		836 lm	INT05002-40K
5000K		880 lm	INT05002-50K



LINEA 900

COLOR TEMP.	POWER	LUMENS	CODE
3000K	18 W	1231 lm	INT05005-30K
4000K		1282 lm	INT05005-40K
5000K		1350 lm	INT05005-50K



LINEA 1200

COLOR TEMP.	POWER	LUMENS	CODE
3000K	24 W	1680 lm	INT05008-30K
4000K		1750 lm	INT05008-40K
5000K		1824 lm	INT05008-50K

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING

www.switch-made.com



SUSPENDED



48V TRACK LIGHT



220V TRACK LIGHT




TRUNK SYSTEM

- CELESTIA SUSPENDED 
- BLACKMOON SUSPENDED 
- EPSILON 
- BETA SUSPENDED 
- ZETA SUSPENDED 
- CYLI 

CELESTIA

p.140

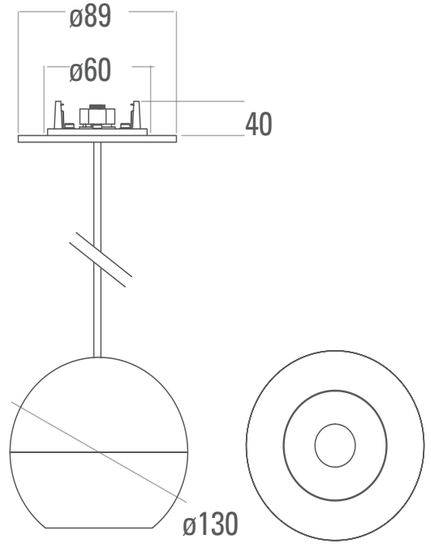

220-240V | IP43 | BRIDGELUX LED | CRI >90 | DIMMABLE **DALI/1-10V** *Optional*


2700K 3000K 4000K




CELESTIA 80 SUSPENDED-B
INT20121
(Optional)

CELESTIA 100 SUSPENDED-B
INT20128
(Optional)


CELESTIA 130 SUSPENDED-B
INT20135
(Optional)




CELESTIA 80 SUSPENDED-A




COLOR TEMP.	POWER	LUMENS	CODE
2700K	12 W	824 lm	INT20120-27K
3000K		942 lm	INT20120-30K
4000K		1017 lm	INT20120-40K




CELESTIA 100 SUSPENDED-A



COLOR TEMP.	POWER	LUMENS	CODE
2700K	15 W	1124 lm	INT20127-27K
3000K		1284 lm	INT20127-30K
4000K		1364 lm	INT20127-40K



CELESTIA 130 SUSPENDED-A




COLOR TEMP.	POWER	LUMENS	CODE
2700K	21 W	1605 lm	INT20134-27K
3000K		1798 lm	INT20134-30K
4000K		1926 lm	INT20134-40K

Features



Similar PRODUCTS

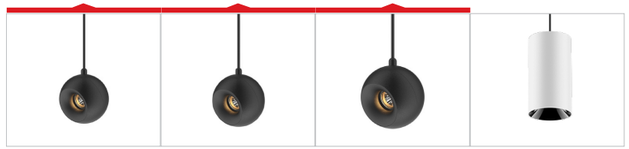




CELESTIA Family


BLACKMOON

p.141



220-240V 50-60Hz | IP20 | UGR <19 | CRI >80/>90/>97 | CITIZEN 1202 LED | DIMMABLE **1-10V/DALI** *Optional*





2700K 3000K 4000K 5000K

Features



BLACKMOON 8 SUSPENDED

COLOR TEMP.	POWER	LUMENS	CODE
2700K	8 W	704 lm	INT03112-27K
3000K		712 lm	INT03112-30K
4000K		740 lm	INT03112-40K

BLACKMOON 10 SUSPENDED

COLOR TEMP.	POWER	LUMENS	CODE
2700K	10 W	886 lm	INT03113-27K
3000K		900 lm	INT03113-30K
4000K		927 lm	INT03113-40K

BLACKMOON Family



CEILING MOUNTED | TRACK | CEILING RECESSED

Similar PRODUCTS



BLACKMOON 8 SUSPENDED | BLACKMOON 10 SUSPENDED | BLACKMOON 14 SUSPENDED | BLACKMOON 20 SUSPENDED | EPSILON

Body:
White (WH) - Black (BK)

Reflector:
High Gloss Black (HGB) - High Gloss Silver (HGS) - Frosted Silver (FS) - White (WH) - Gold (GD) - Black (BK)





BLACKMOON

p.142



220-240V 50-60Hz | IP20 | UGR <19 | CRI >80/>90/>97 | CITIZEN 1204 LED | DIMMABLE **1-10V/DALI** *Optional*





BLACKMOON 14 SUSPENDED

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	14 W	90+	1280 lm	INT03024-27K
3000K			1300 lm	INT03024-30K
4000K			1350 lm	INT03024-40K

BLACKMOON 20 SUSPENDED

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	20 W	90+	1674 lm	INT03025-27K
3000K			1700 lm	INT03025-30K
4000K			1751 lm	INT03025-40K

2700K 3000K 4000K 5000K

Features



BLACKMOON Family



CEILING MOUNTED | TRACK | CEILING RECESSED

Similar PRODUCTS



BLACKMOON 8 SUSPENDED | BLACKMOON 10 SUSPENDED | BLACKMOON 14 SUSPENDED | BLACKMOON 20 SUSPENDED | EPSILON

Body:
White (WH) - Black (BK)

Reflector:
High Gloss Black (HGB) - High Gloss Silver (HGS) - Frosted Silver (FS) - White (WH) - Gold (GD) - Black (BK)



EPSILON

p.143



220-240 Vac | IP20 | <3SDCM | CRI >90 | UGR<15 | CREE COB LED

15° 24° 38°


2700K 3000K 4000K 5000K

Features

EPSILON 15 EPSILON 20 EPSILON 30

REFLECTOR FINISH


BLACK WHITE GOLD



EPSILON 15

CREE 1512 LED


COLOR TEMP.	POWER	LUMENS	CODE
2700K	15 W	1275 lm	INT07332-27K
3000K		1350 lm	INT07332-30K
4000K		1425 lm	INT07332-40K



EPSILON 20

CREE 1512 LED

COLOR TEMP.	POWER	LUMENS	CODE
2700K	20 W	1700 lm	INT07335-27K
3000K		1850 lm	INT07335-30K
4000K		1920 lm	INT07335-40K



EPSILON 30

CREE 2520 LED

COLOR TEMP.	POWER	LUMENS	CODE
2700K	30 W	2550 lm	INT07338-27K
3000K		2670 lm	INT07338-30K
4000K		2850 lm	INT07338-40K

Similar >> CATEGORY



CELESTIA 80 SUSPENDED-A | BLACKMOON 8 SUSPENDED | EPSILON | BETA | ZETA | CYLI

BETA SUSPENDED

p.144




2700K 3000K 4000K 5000K

Features



BETA 15 BETA 20

100-240 Vac | IP20 | <3SDCM | CRI >80 | CREE 1512 COB LED




BETA Family




CEILING MOUNTED



TRACK





BETA 15 SUSPENDED

COLOR TEMP.	POWER	LUMENS	CODE
2700K	15 W	1275 lm	INT07340-27K
3000K		1335 lm	INT07340-30K
4000K		1400 lm	INT07340-40K

BETA 20 SUSPENDED

COLOR TEMP.	POWER	LUMENS	CODE
2700K	20 W	1700 lm	INT07343-27K
3000K		1780 lm	INT07343-30K
4000K		1860 lm	INT07343-40K

REFLECTOR FINISH



Gold | High Gloss Black | High Gloss Silver | Frosted

Similar » CATEGORY



CELESTIA 80 SUSPENDED-A | BLACKMOON 8 SUSPENDED | EPSILON | BETA | ZETA | CYLI

ZETA SUSPENDED

p.145



100-240 Vac | IP20 | IK06 | CRI >80/>90 | 105lm/W | LUMINUS COB LED | DIMMABLE **TRIAC**

15º 18º 24º 38º

2700K 3000K 4000K 5000K

Features



ZETA 20 | ZETA 30 | ZETA II (Optional)

Similar » CATEGORY



CELESTIA 80 SUSPENDED-A | BLACKMOON 8 SUSPENDED | EPSILON | BETA | ZETA | CYLI

ZETA Family




TRACK



WALL MOUNTED



CEILING MOUNTED





ZETA 20 SUSPENDED

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	20 W	80+	2020 lm	INT07351-27K
3000K			2120 lm	INT07351-30K
4000K			2180 lm	INT07351-40K

ZETA 30 SUSPENDED

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	30 W	80+	3015 lm	INT07354-27K
3000K			3150 lm	INT07354-30K
4000K			3240 lm	INT07354-40K




ZETA II (OPTIONAL)


CYLI


p.146



100-240 Vac | IP65 | IK08 | CRI >80/>95 | CREE COB LED







CYLI-I 15W

CREE CXA1512

COLOR TEMP.	POWER	LUMENS	CODE
3000K	15 W	1319 lm	EXT05131-30K
4000K		1350 lm	EXT05131-40K

CYLI-I 20W

CREE CXA2520

COLOR TEMP.	POWER	LUMENS	CODE
3000K	20 W	2254 lm	EXT05133-30K
4000K		2372 lm	EXT05133-40K

CYLI-II 15W

CREE CXA1512

COLOR TEMP.	POWER	LUMENS	CODE
3000K	15 W	1319 lm	EXT05135-30K
4000K		1350 lm	EXT05135-40K

CYLI-II 20W

CREE CXA2520

COLOR TEMP.	POWER	LUMENS	CODE
3000K	20 W	2254 lm	EXT05137-30K
4000K		2372 lm	EXT05137-40K



3000K 4000K 5000K

Features



CYLI - I 15W | CYLI - I 20W | CYLI - II 15W | CYLI - II 20W

Similar >> CATEGORY



CELESTIA 80 SUSPENDED-A | BLACKMOON 8 SUSPENDED | EPSILON | BETA | ZETA | CYLI

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING



SUSPENDED



48V TRACK LIGHT



220V TRACK LIGHT



TRUNK SYSTEM

- CELESTIA 48V TRACK LIGHT 
- CELESTIA 48V SUSPENDED 

CELESTIA

p.148



220-240V | IP43 | BRIDGELUX LED | CRI >90 | DIMMABLE **DALI/1-10V** *Optional*

2700K 3000K 4000K

Features




60 48V TRACK | 80 48V TRACK | 80 48V (OPTIONAL)


Similar PRODUCTS




60 / 80 48V TRACK | 60 / 80 48V SUSPENDED | 100 / 130 48V SUSPENDED

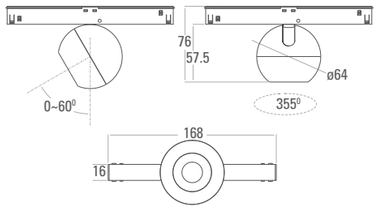


CELESTIA 60 48V TRACK



COLOR TEMP.	POWER	LUMENS	CODE
2700K	8.5 W	556 lm	INT20106-27K
3000K		621 lm	INT20106-30K
4000K		696 lm	INT20106-40K

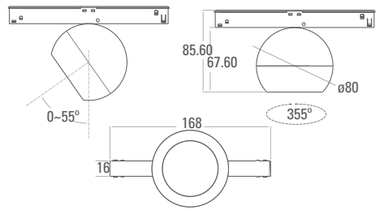

CELESTIA 80 48V TRACK



COLOR TEMP.	POWER	LUMENS	CODE
2700K	12 W	824 lm	INT20112-27K
3000K		942 lm	INT20112-30K
4000K		1017 lm	INT20112-40K



220V TRACK

(Optional)



RECESSED | SURFACE | SUSPENDED | TRACK

CELESTIA Family

CELESTIA

p.149




220-240V | IP43 | BRIDGELUX LED | CRI >90 | DIMMABLE **DALI/1-10V** *Optional*


2700K 3000K 4000K

Features




60 SUSPENDED | 80 SUSPENDED



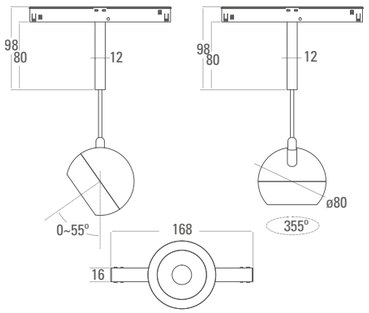


CELESTIA 60 48V SUSPENDED



COLOR TEMP.	POWER	LUMENS	CODE
2700K	8.5 W	556 lm	INT20107-27K
3000K		621 lm	INT20107-30K
4000K		696 lm	INT20107-40K

CELESTIA 80 48V SUSPENDED




COLOR TEMP.	POWER	LUMENS	CODE
2700K	12 W	824 lm	INT20113-27K
3000K		942 lm	INT20113-30K
4000K		1017 lm	INT20113-40K



RECESSED | SURFACE | SUSPENDED | TRACK

CELESTIA Family

Similar PRODUCTS

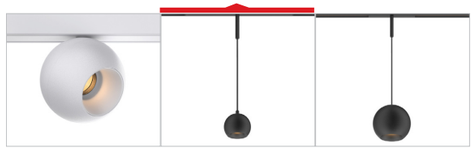

60 / 80 48V TRACK | 60 / 80 48V SUSPENDED | 100 / 130 48V SUSPENDED

CELESTIA

p.150




220-240V | IP43 | BRIDGELUX LED | CRI >90 | DIMMABLE **DALI/1-10V** *Optional*


2700K 3000K 4000K

Features




100 SUSPENDED 130 SUSPENDED






CELESTIA 100 48V SUSPENDED



COLOR TEMP.	POWER	LUMENS	CODE
2700K	15 W	1124 lm	INT20122-27K
3000K		1284 lm	INT20122-30K
4000K		1364 lm	INT20122-40K

CELESTIA 130 48V SUSPENDED



COLOR TEMP.	POWER	LUMENS	CODE
2700K	21 W	1605 lm	INT20129-27K
3000K		1798 lm	INT20129-30K
4000K		1926 lm	INT20129-40K

Similar PRODUCTS



60 / 80 48V TRACK | 60 / 80 48V SUSPENDED | 100 / 130 48V SUSPENDED



RECESSED | SURFACE | SUSPENDED | TRACK

CELESTIA Family

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING

www.switch-made.com



SUSPENDED



48V TRACK LIGHT



220V TRACK LIGHT



TRUNK SYSTEM

- CELESTIA 220V TRACK LIGHT 
- BLACKMOON TRACK 
- ZOOM - X 
- PIXEL TRACK 
- BETA TRACK 
- ZETA TRACK 
- CIRCO - X 
- 3 CIRCUITS TRACK SYSTEM 

CELESTIA


p.152

SWITCH MADE LED SOLUTIONS




220-240V | IP43 | BRIDGELUX LED | CRI >90 | DIMMABLE **DALI/1-10V** *Optional*

2700K 3000K 4000K



CELESTIA 80 220V TRACK



COLOR TEMP.	POWER	LUMENS	CODE
2700K	12 W	824 lm	INT20114-27K
3000K		942 lm	INT20114-30K
4000K		1017 lm	INT20114-40K



48V TRACK

(OPTIONAL)

Features



Similar PRODUCTS



80 220V TRACK | BLACKMOON 8 TRACK | ZOOM - X | PIXEL TRACK | BETA TRACK | ZETA TRACK | CIRCO - X



RECESSED | SURFACE | SUSPENDED | TRACK

CELESTIA Family

3 CIRCUITS TRACK SYSTEM **3 CIRCUITS TRACK ACCESSORIES**

BLACKMOON


p.153



230 Vac | IP20 | CITIZEN 1204 LED | CRI >80/ >90 | UGR<19 | DIMMABLE **DALI/0-10V** *Optional*





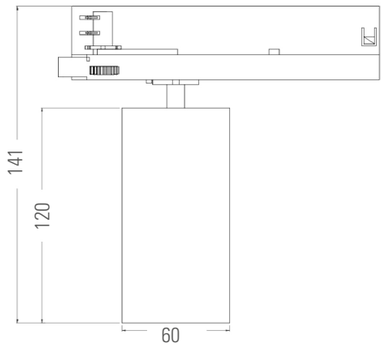

2700K 3000K 4000K 5000K

Features



BLACKMOON 8 TRACK

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	8 W	90+	704 lm	INT03023-27K
3000K			712 lm	INT03023-30K
4000K			740 lm	INT03023-40K

BLACKMOON 10 TRACK

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	10 W	90+	886 lm	INT03109-27K
3000K			900 lm	INT03109-30K
4000K			927 lm	INT03109-40K

BLACKMOON Family


CEILING MOUNTED


SUSPENDED


CEILING RECESSED

Similar PRODUCTS


BLACKMOON 8 TRACK | BLACKMOON 10 TRACK | BLACKMOON 14 TRACK | BLACKMOON 20 TRACK | ZOOM - X

Next...

3 CIRCUITS TRACK SYSTEM | 3 CIRCUITS TRACK ACCESSORIES

BLACKMOON


p.154



230 Vac | IP20 | CITIZEN 1204 LED | CRI >80/ >90 | UGR<19 | DIMMABLE **DALI/0-10V** *Optional*







2700K 3000K 4000K 5000K

Features



BLACKMOON 14 TRACK

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	14 W	90+	1280 lm	INT03110-27K
3000K			1300 lm	INT03110-30K
4000K			1350 lm	INT03110-40K

BLACKMOON 20 TRACK

COLOR TEMP.	POWER	CRI	LUMENS	CODE
2700K	20 W	90+	1674 lm	INT03111-27K
3000K			1700 lm	INT03111-30K
4000K			1751 lm	INT03111-40K

BLACKMOON Family


CEILING MOUNTED


SUSPENDED


CEILING RECESSED

Similar PRODUCTS



BLACKMOON 8 TRACK | BLACKMOON 10 TRACK | BLACKMOON 14 TRACK | BLACKMOON 20 TRACK | ZOOM - X

Next...


3 CIRCUITS TRACK SYSTEM | 3 CIRCUITS TRACK ACCESSORIES


ZOOM-X

p.155



200-240 Vac | IP20 | CREE LED | CRI >85 | 15°-50°





2700K 3000K 4000K 5000K



Features

ZOOM-X 20

CREE 1512 LED

COLOR TEMP.	POWER	LUMENS	CODE
2700K	20 W	1700 lm	INT03005-27K
3000K		1780 lm	INT03005-30K
4000K		1880 lm	INT03005-40K

ZOOM-X 30

CREE 1820 LED

COLOR TEMP.	POWER	LUMENS	CODE
2700K	30 W	2550 lm	INT03008-27K
3000K		2670 lm	INT03008-30K
4000K		2880 lm	INT03008-40K

90° 90° adjustable in vertical

355° Rotatable through 355° on adapter

3 CIRCUITS TRACK SYSTEM | 3 CIRCUITS TRACK ACCESSORIES

Similar » CATEGORY



80 220V TRACK | BLACKMOON 8 TRACK | ZOOM - X | PIXEL TRACK | BETA TRACK | ZETA TRACK | CIRCO - X


PIXEL TRACK

p.156



200-240 Vac | IP20 | CREE XTE SMD LED | CRI >80/>90

15° 30° 45°



PIXEL TRACK

COLOR TEMP.	POWER	LUMENS	CODE
2700K	20 W	1800 lm	INT03012-27K
3000K		1920 lm	INT03012-30K
4000K		1980 lm	INT03012-40K

2700K 3000K 4000K 5000K

90° 90° adjustable in vertical

355° Rotatable through 355° on adapter

Features



Similar » CATEGORY




80 220V TRACK | BLACKMOON 8 TRACK | ZOOM - X | PIXEL TRACK | BETA TRACK | ZETA TRACK | CIRCO - X

3 CIRCUITS TRACK SYSTEM | 3 CIRCUITS TRACK ACCESSORIES

BETA TRACK

p.157

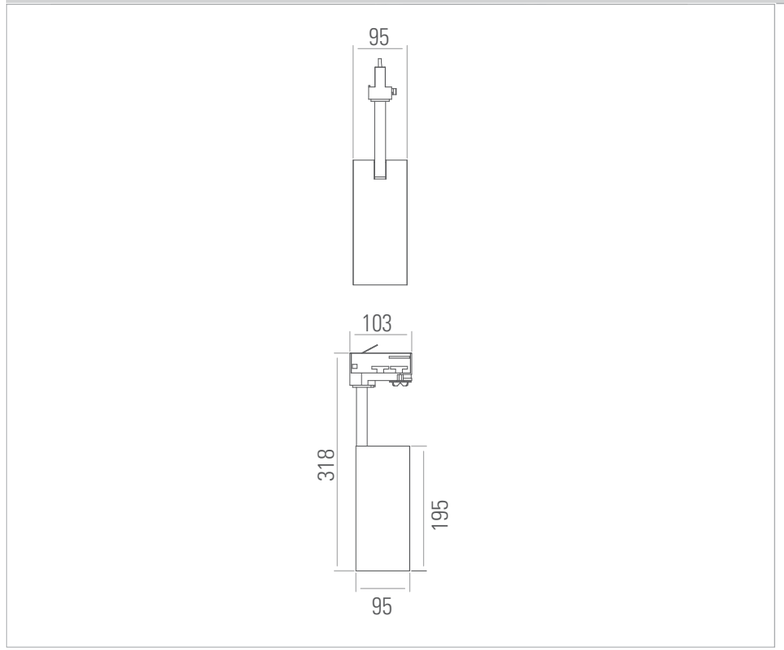

100-240 Vac | IP20 | <3SDCM | CRI >80 | 100lm/W | CREE COB LED

15° 30° 45°

2700K 3000K 4000K 5000K

Features




BETA Family




CEILING MOUNTED



SUSPENDED





BETA 20 TRACK

CREE 1512 LED

COLOR TEMP.	POWER	LUMENS	CODE
2700K	20 W	1800 lm	INT03014-27K
3000K		1920 lm	INT03014-30K
4000K		1980 lm	INT03014-40K

BETA 30 TRACK

CREE 1820 LED

COLOR TEMP.	POWER	LUMENS	CODE
2700K	30 W	2550 lm	INT03017-27K
3000K		2670 lm	INT03017-30K
4000K		2880 lm	INT03017-40K

Similar » CATEGORY



80 220V TRACK | BLACKMOON 8 TRACK | ZOOM - X | PIXEL TRACK | BETA TRACK | ZETA TRACK | CIRCO - X

3 CIRCUITS TRACK SYSTEM **3 CIRCUITS TRACK ACCESSORIES**

ZETA TRACK

p.158



100-240 Vac | IP20 | IK06 | CRI >80/>90 | 105lm/W | LUMINUS COB LED

15º 18º 24º 38º

2700K 3000K 4000K 5000K

Features





ZETA Family




SUSPENDED



WALL MOUNTED



CEILING MOUNTED



4-pin track adaptor

ZETA 20 TRACK

COLOR TEMP.	POWER	LUMENS	CODE
2700K	20 W	2020 lm	INT07220-27K
3000K		2120 lm	INT07220-30K
4000K		2180 lm	INT07220-40K

ZETA 30 TRACK

COLOR TEMP.	POWER	LUMENS	CODE
2700K	30 W	3015 lm	INT07223-27K
3000K		3150 lm	INT07223-30K
4000K		3240 lm	INT07223-40K



ZETA II (OPTIONAL)

3 CIRCUITS TRACK SYSTEM | **3 CIRCUITS TRACK ACCESSORIES**

Similar » CATEGORY




80 220V TRACK | BLACKMOON 8 TRACK | ZOOM - X | PIXEL TRACK | BETA TRACK | ZETA TRACK | CIRCO - X

ZETA FEATURES

p.159

ZETA range offers stylish and compact solution with excellent modular combination concept for different applications, lighting control accessories and mounting possibilities, aluminium body ensures better heat dissipation, stylish and compact design with integrated driver, possible to have different optical accessories to fulfill lighting demands, rotationally symmetric distribution, optional triac dimmable model, availability of wide range of glare and lighting control accessories.

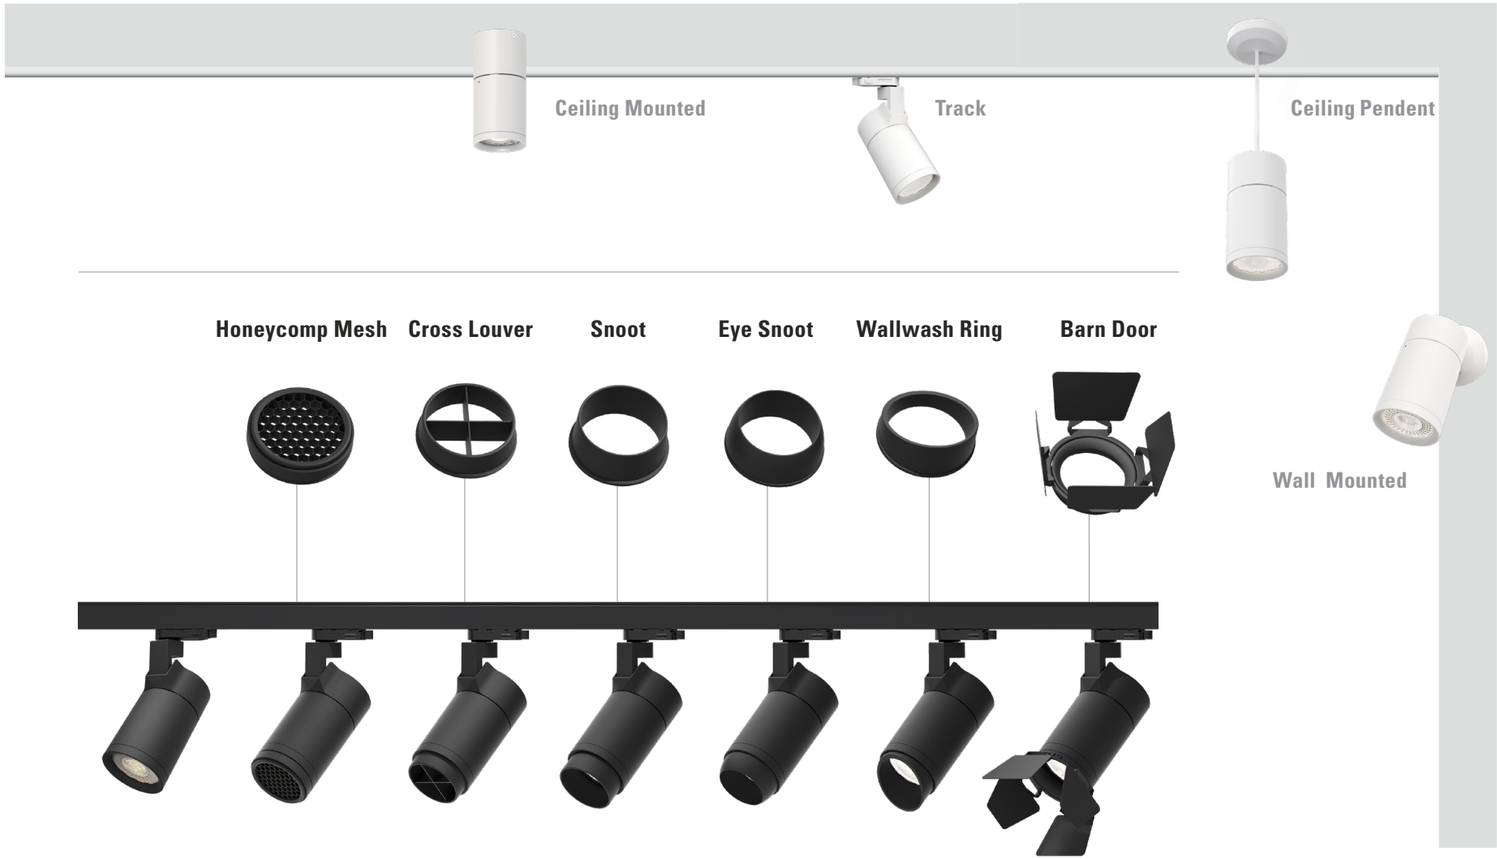

Similar FAMILY




TRACK SUSPENDED WALL MOUNTED CEILING MOUNTED


Next...


CIRCO-X


p.160

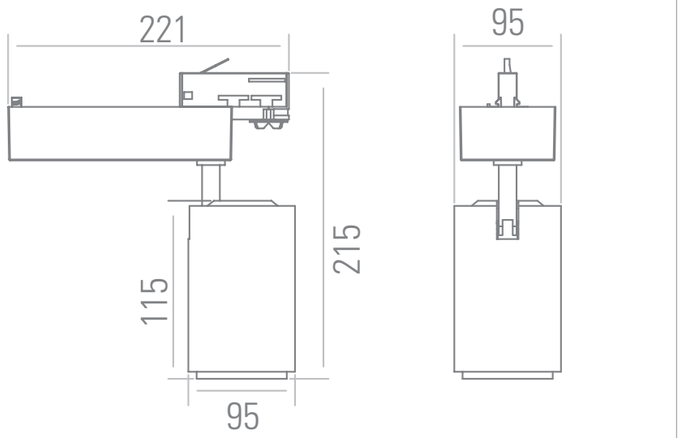

220-240 Vac | IP20 | CREE COB LED | CRI >80/>90 | 85lm/W | 15° | 38°







2700K 3000K 4000K 5000K

Features



CIRCO-X 20

CREE 1512 LED

COLOR TEMP.	POWER	LUMENS	CODE
2700K	20 W	2020 lm	INT07227-27K
3000K		2120 lm	INT07227-30K
4000K		2180 lm	INT07227-40K

CIRCO-X 30

CREE 1820 LED

COLOR TEMP.	POWER	LUMENS	CODE
2700K	30 W	3015 lm	INT07230-27K
3000K		3150 lm	INT07230-30K
4000K		3240 lm	INT07230-40K

CIRCO-X 40

CREE 1830 LED

COLOR TEMP.	POWER	LUMENS	CODE
2700K	40 W	3720 lm	INT07233-27K
3000K		3800 lm	INT07233-30K
4000K		3960 lm	INT07233-40K

Similar » CATEGORY



80 220V TRACK | BLACKMOON 8 TRACK | ZOOM - X | PIXEL TRACK | BETA TRACK | ZETA TRACK | CIRCO - X


3 CIRCUITS TRACK SYSTEM **3 CIRCUITS TRACK ACCESSORIES**

3 CIRCUITS TRACK SYSTEM


p.161

This system enables an installation of several spots on a rail by 3 different switches.
2 possible installations:
• CEILING MOUNTED
• RECESSED


CEILING MOUNTED 3 CIRCUITS TRACK




		CODE	DIMENSIONS	PRICE
	WHITE	INT07178	L.2000 mm	-
		INT07179	L.3000 mm	-
	BLACK	INT07180	L.2000 mm	-
		INT07181	L.3000 mm	-
	GREY	INT07182	L.2000 mm	-
		INT07183	L.3000 mm	-

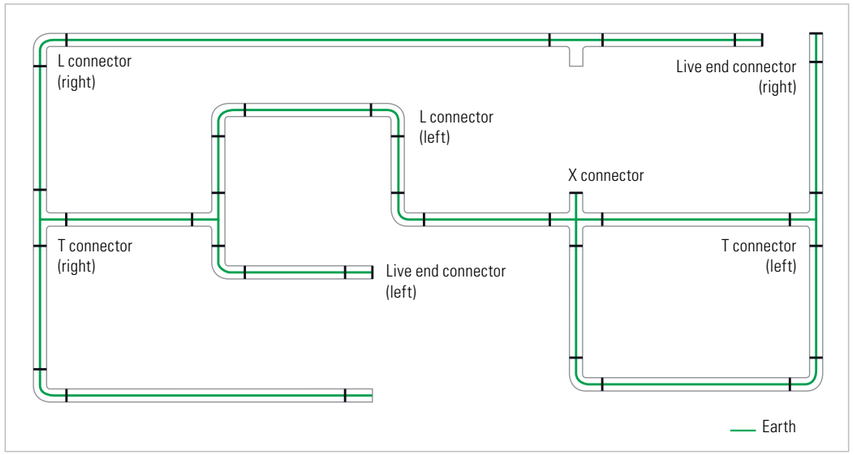

RECESSED 3 CIRCUITS TRACK





		CODE	DIMENSIONS	PRICE
	WHITE	INT07184	L.2000 mm	-
LIVE END CONNECTOR COVER				
	WHITE	INT07185	L.64 / W.56 mm	-
	BLACK	INT07186	L.64 / W.56 mm	-
	GREY	INT07187	L.64 / W.56 mm	-
T CONNECTOR COVER				
	WHITE	INT07110	L.99 / W.78 mm	-
	BLACK	INT07111	L.99 / W.78 mm	-
	GREY	INT07112	L.99 / W.78 mm	-

		CODE	DIMENSIONS	PRICE
L CONNECTOR COVER				
	WHITE	INT07113	L.78 / W.78 mm	-
	BLACK	INT07114	L.78 / W.78 mm	-
	GREY	INT07115	L.78 / W.78 mm	-
STRAIGHT CONNECTOR COVER				
	WHITE	INT07116	L.99 / W.56 mm	-
	BLACK	INT07117	L.99 / W.56 mm	-
	GREY	INT07118	L.99 / W.56 mm	-
X CONNECTOR COVER				
	WHITE	INT07119	L.99 / W.99 mm	-
	BLACK	INT07120	L.99 / W.99 mm	-
	GREY	INT07121	L.99 / W.99 mm	-

3 CIRCUITS TRACK ACCESSORIES

p.162

		CODE	DIMENSIONS	PRICE
3 CIRCUITS ADAPTOR				
	WHITE	INT07122	L.84 / W.54 mm	-
	BLACK	INT07123	L.84 / W.54 mm	-
	GREY	INT07124	L.84 / W.54 mm	-
LEFT LIVE END CONNECTOR				
	WHITE	INT07125	L.98 / W.31 mm	-
	BLACK	INT07126	L.99 / W.78 mm	-
	GREY	INT07127	L.99 / W.78 mm	-
RIGHT LIVE END CONNECTOR				
	WHITE	INT07128	L.98 / W.31 mm	-
	BLACK	INT07129	L.99 / W.78 mm	-
	GREY	INT07130	L.99 / W.78 mm	-
END CAP CONNECTS				
	WHITE	INT07131	L.31 / W.31 mm	-
	BLACK	INT07132	L.31 / W.31 mm	-
	GREY	INT07133	L.31 / W.31 mm	-
MINI JOINER				
	WHITE	INT07134	L.68 / W.20 mm	-
	BLACK	INT07135	L.68 / W.20 mm	-
	GREY	INT07136	L.68 / W.20 mm	-
STRAIGHT CONNECTOR				
	WHITE	INT07137	L.99 / W.31 mm	-
	BLACK	INT07138	L.99 / W.31 mm	-
	GREY	INT07139	L.99 / W.31 mm	-

		CODE	DIMENSIONS	PRICE
FLEXIBLE CONNECTOR				
	WHITE	INT07140	L.244 / W.31 mm	-
	BLACK	INT07141	L.244 / W.31 mm	-
	GREY	INT07142	L.244 / W.31 mm	-
X CONNECTOR				
	WHITE	INT07143	L.166 / W.166 mm	-
	BLACK	INT07144	L.166 / W.166 mm	-
	GREY	INT07145	L.166 / W.166 mm	-
L LEFT CONNECTOR				
	WHITE	INT07146	L.98 / W.98 mm	-
	BLACK	INT07147	L.98 / W.98 mm	-
	GREY	INT07148	L.98 / W.98 mm	-
L RIGHT CONNECTOR				
	WHITE	INT07149	L.98 / W.98 mm	-
	BLACK	INT07150	L.98 / W.98 mm	-
	GREY	INT07151	L.98 / W.98 mm	-
T LEFT CONNECTOR 1				
	WHITE	INT07152	L.166 / W.99 mm	-
	BLACK	INT07153	L.166 / W.99 mm	-
	GREY	INT07154	L.166 / W.99 mm	-
T RIGHT CONNECTOR 1				
	WHITE	INT07155	L.166 / W.99 mm	-
	BLACK	INT07156	L.166 / W.99 mm	-
	GREY	INT07157	L.166 / W.99 mm	-

		CODE	DIMENSIONS	PRICE
T LEFT CONNECTOR 2				
	WHITE	INT07158	L.166/ W.99 mm	-
	BLACK	INT07159	L.166/ W.99 mm	-
	GREY	INT07160	L.166/ W.99 mm	-
T RIGHT CONNECTOR 2				
	WHITE	INT07161	L.166/ W.99 mm	-
	BLACK	INT07162	L.166/ W.99 mm	-
	GREY	INT07163	L.166/ W.99 mm	-
HANGING SET WITH 6 MM X 1 M				
	WHITE	INT07164	-	-
	BLACK	INT07165	-	-
	GREY	INT07166	-	-
HANGING SET WITH 1,5 M WIRE				
	WHITE	INT07167	-	-
	BLACK	INT07168	-	-
	GREY	INT07169	-	-
MECHANICAL ADAPTOR				
	WHITE	INT07170	-	-
	BLACK	INT07171	-	-
	GREY	INT07172	-	-
SURFACE CEILING SET				
	WHITE	INT07173	-	-
	BLACK	INT07174	-	-
	GREY	INT07175	-	-

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING



SUSPENDED



48V TRACK LIGHT



220V TRACK LIGHT



TRUNK SYSTEM

- LINE MAX 1 
- LINE MAX 2 


www.switch-made.com

LINE MAX

p.164



220-240 Vac | IP20 | CRI > 80 | IK08 | 3 SDCM | 160 lm/W | DIMMABLE **1-10V/DALI** Optional



OPTIONAL BEAM OPTICS

Motion Sensor

Emergency Control

3000K 4000K 5000K 6000K


LINE MAX 1

COLOR TEMP.	LED	POWER	LUMENS	MAX. LINKABLE	CODE
4000K	243 LEDs	50 W	8000 lm	70 pcs.	INT04131-40K



LINE MAX 2

COLOR TEMP.	LED	POWER	LUMENS	MAX. LINKABLE	CODE
4000K	336 LEDs	70 W	11200 lm	50 pcs.	INT04132-40K



Features



Similar CATEGORY



Next...

LINE MAX

Accessories
(to be ordered separately)



Trunk
L-1416/2832/4248mm
(back base with cable and connectors)



Terminal feed-in box
(for supplimentary electrical feed-in)



Suspension Kit
(chain-3m, cord-3m, rod-1m)



Surface Bracket
(1pc. bracket + 1pc. clip)



Endcap
(1pc. endcap)

LINE MAX FEATURES

p.165

LED linear trunking system with wide choice of beam optics, applied to the shelving lighting in tight space such as warehouse, supermarket and workshop, polished steel profile housing, PMMA lens, PC endcaps, polycarbonate optical cover, with different lighting control options, lower maintenance, built-in driver, suspended/surface mounting choices, optional X, L, T node connectors also available.





PC FROSTED DIFFUSER (120° Beam)



PC LENS DIFFUSER



Daylight Sensor

MotionSensor



Emergency Backup



0-10 VDC 0-10V

DALI





Similar CATEGORY



Next...

LINE MAX

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING



COMET ALU



COMET PC OPEN



COMET PC SEALED



COMET PC SLIM

- COMET - ALU 600



- COMET - ALU 1200



- COMET - ALU 1500



COMET-ALU

p.167




220-240 Vac	IP65	IK08	CRI >80	SMD 2835	120 lm/W	0-10V/DALI Optional


120°


Daylight Sensor | **Microwave** Sensor | **Emergency** Control

Optional

3000K 4000K 5000K 6500K







Features



Similar PRODUCTS



COMET - ALU | COMET PC OPEN | COMET PC SEALED | COMET PC SLIM

Next...

COMET-ALU 600

COLOR TEMP.	POWER	LUMENS	CODE
3000K	40 W	4440 lm	EXT19015-30K
4000K		4640 lm	EXT19015-40K
6500K		4840 lm	EXT19015-65K

COMET-ALU 1200

COLOR TEMP.	POWER	LUMENS	CODE
3000K	60 W	6720 lm	EXT19016-30K
4000K		7020 lm	EXT19016-40K
6500K		7260 lm	EXT19016-65K

COMET-ALU 1500

COLOR TEMP.	POWER	LUMENS	CODE
3000K	75 W	8325 lm	EXT19017-30K
4000K		8650 lm	EXT19017-40K
6500K		9000 lm	EXT19017-65K

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING



COMET ALU



COMET PC OPEN



COMET PC SEALED



COMET PC SLIM

- COMET PC - OPEN 600 
- COMET PC - OPEN 1200 
- COMET PC - OPEN 1500 

COMET PC-OPEN

p.169




220-240 Vac	IP65	IK08	CRI >80	SMD 2835	110 lm/W	DIMMABLE **0-10V/DALI** Optional

120°

Daylight Sensor | **Microwave** Sensor | **Emergency** Control

Optional

3000K 4000K 5000K 6500K







Features





COMET PC-OPEN 600

COLOR TEMP.	POWER	LUMENS	CODE
3000K	20 W	2100 lm	EXT19009-30K
4000K		2160 lm	EXT19009-40K
6500K		2260 lm	EXT19009-65K

COMET PC-OPEN 1200

COLOR TEMP.	POWER	LUMENS	CODE
3000K	40 W	4200 lm	EXT19010-30K
4000K		4320 lm	EXT19010-40K
6500K		4400 lm	EXT19010-65K

COMET PC-OPEN 1500

COLOR TEMP.	POWER	LUMENS	CODE
3000K	58 W	6090 lm	EXT19011-30K
4000K		6260 lm	EXT19011-40K
6500K		6380 lm	EXT19011-65K

Similar PRODUCTS



COMET - ALU | COMET PC OPEN | COMET PC SEALED | COMET PC SLIM

Next...

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING

www.switch-made.com



COMET ALU



COMET PC OPEN



COMET PC SEALED



COMET PC SLIM

- COMET PC - SEALED 600 
- COMET PC - SEALED 1200 
- COMET PC - SEALED 1500 

COMET PC-SEALED


p.171

SWITCH MADE LED SOLUTIONS



220-240 Vac	IP65	IK08	CRI >80	SMD 2835	100 lm/W	**1-10V/DALI** Optional	120°

3000K 4000K 5000K 6500K



COMET PC-SEALED 600

COLOR TEMP.	POWER	LUMENS	CODE
3000K	20 W	1880 lm	EXT19006-30K
4000K		1930 lm	EXT19006-40K
6500K		2000 lm	EXT19006-65K




COMET PC-SEALED 1200

COLOR TEMP.	POWER	LUMENS	CODE
3000K	40 W	3760 lm	EXT19007-30K
4000K		3860 lm	EXT19007-40K
6500K		4000 lm	EXT19007-65K

Features





COMET PC-SEALED 1500

COLOR TEMP.	POWER	LUMENS	CODE
3000K	60 W	5640 lm	EXT19008-30K
4000K		5780 lm	EXT19008-40K
6500K		6000 lm	EXT19008-65K

Similar PRODUCTS



COMET - ALU | COMET PC OPEN | COMET PC SEALED | COMET PC SLIM

Next...

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING

www.switch-made.com



COMET ALU



COMET PC OPEN



COMET PC SEALED



COMET PC SLIM

- COMET PC - SLIM 600
- COMET PC - SLIM 1200
- COMET PC - SLIM 1500

COMET PC-SLIM

p.173



220-240 Vac | IP65 | IK08 | CRI >80 | SMD 2835 | 98 lm/W

120°

3000K 4000K 5000K 6500K

Features





Similar PRODUCTS



COMET - ALU | COMET PC OPEN | COMET PC SEALED | COMET PC SLIM

Next...



COMET PC-SLIM 600

COLOR TEMP.	POWER	LUMENS	CODE
3000K	20 W	1840 lm	EXT19012-30K
4000K		1900 lm	EXT19012-40K
6500K		1950 lm	EXT19012-65K



COMET PC-SLIM 1200

COLOR TEMP.	POWER	LUMENS	CODE
3000K	36 W	3340 lm	EXT19013-30K
4000K		3420 lm	EXT19013-40K
6500K		3520 lm	EXT19013-65K



COMET PC-SLIM 1500

COLOR TEMP.	POWER	LUMENS	CODE
3000K	50 W	4600 lm	EXT19014-30K
4000K		4750 lm	EXT19014-40K
6500K		4900 lm	EXT19014-65K

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY



THEOS

THEOS COMPACT

THEOS RACK

- THEOS 100 
- THEOS 150 
- THEOS 200 
- THEOS 300 

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING


www.switch-made.com

THEOS


p.175



100-240 Vac | IP65 | IK08 | CRI >80 | NICHIA SMD LED | 140lm/W | DIMMABLE **DALI** Optional | EMERGENCY **3Hr. Battery Backup** Optional



Daylight Sensor | **Microwave** Sensor | **ZigBee** Wireless Control | **Emergency** Control



3000K 4000K 5000K

THEOS 100

COLOR TEMP.	POWER	LUMENS	CODE
3000K	100 W	12500 lm	IND08021-30K
4000K		13500 lm	IND08021-40K
5000K		14000 lm	IND08021-50K

THEOS 150


COLOR TEMP.	POWER	LUMENS	CODE
3000K	150 W	18750 lm	IND08024-30K
4000K		20250 lm	IND08024-40K
5000K		21000 lm	IND08024-50K

Features



THEOS 100 THEOS 150

Similar PRODUCTS



THEOS 100 | THEOS 150 | THEOS 200 | THEOS 300 | THEOS COMPACT



ALU. REFLECTOR (OPTIONAL)



PC REFLECTOR (OPTIONAL)

MOUNTING ACCESSORIES TO BE ORDERED SEPARATELY

THEOS

p.176




100-240 Vac | IP65 | IK08 | CRI >80 | NICHIA SMD LED | 140 lm/W

Daylight Sensor


Microwave Sensor


ZigBee Wireless Control



THEOS 200 **THEOS 300**

3000K 4000K 5000K





THEOS 200

DIMMABLE **DALI** Optional

EMERGENCY **3Hr. Battery Backup** Optional

Emergency Control

COLOR TEMP.	POWER	LUMENS	CODE
3000K	200 W	25000 lm	IND08027-30K
4000K		27000 lm	IND08027-40K
5000K		28000 lm	IND08027-50K

THEOS 300

COLOR TEMP.	POWER	LUMENS	CODE
3000K	300 W	37500 lm	IND08030-30K
4000K		40500 lm	IND08030-40K
5000K		42000 lm	IND08030-50K

Features



THEOS 200 THEOS 300

Similar PRODUCTS



THEOS 100 | THEOS 150 | THEOS 200 | THEOS 300 | THEOS COMPACT



DALI | Emergency | Daylight Sensor | Motion Sensor | Zigbee

MOUNTING ACCESSORIES TO BE ORDERED SEPARATELY

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING



THEOS



THEOS COMPACT



THEOS RACK

- THEOS COMPACT 100 
- THEOS COMPACT 150 
- THEOS COMPACT 200 

THEOS COMPACT

p.178



3000K 4000K 5000K 5700K 6500K

Features




100 150 200

Similar PRODUCTS



THEOS 100 | THEOS 150 | THEOS 200 | THEOS 300 | THEOS COMPACT

100-240 Vac	IP65	IK08	CRI >80	130 lm/W	SAMSUNG SMD 2835 LED	DIMMABLE **1-10V** Optional



PC LENS | CLEAR GLASS

Daylight Sensor

Microwave Sensor



90° Alu. Reflector





60° Alu. Reflector




PC Reflector

Next...







THEOS COMPACT 100

COLOR TEMP.	POWER	LUMENS	CODE
3000K	100 W	12000 lm	IND08041-30K
4000K		12500 lm	IND08041-40K
5000K		13000 lm	IND08041-50K

THEOS COMPACT 150

COLOR TEMP.	POWER	LUMENS	CODE
3000K	150 W	18000 lm	IND08044-30K
4000K		18750 lm	IND08044-40K
5000K		19500 lm	IND08044-50K

THEOS COMPACT 200

COLOR TEMP.	POWER	LUMENS	CODE
3000K	200 W	24000 lm	IND08047-30K
4000K		25000 lm	IND08047-40K
5000K		26000 lm	IND08047-50K



CEILING FIXED / ADJUSTABLE BRACKET, CHAIN, PC / ALU. REFLECTOR
TO BE ORDERED SEPARATELY

LED GUIDE 2023

SWITCH MADE LED SOLUTIONS

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING



THEOS



THEOS COMPACT



THEOS RACK

- THEOS RACK 60 
- THEOS RACK 90 
- THEOS RACK 120 
- THEOS RACK 150 
- THEOS RACK 180 
- THEOS RACK 240 

www.switch-made.com

THEOS RACK

p.180



100-240 Vac | IP65 | IK10 | CRI >80 | NICHIA SMD LED | 130 lm/W | DIMMABLE **DALI/1-10V** Optional

90º | 120º | 30ºx70º | 60ºx90º | 40ºx130º

Daylight Sensor | **Microwave** Sensor | **ZigBee** Wireless Control


3000K 4000K 5000K

Features




60 90 120

THEOS RACK 60




COLOR TEMP.	POWER	LUMENS	CODE
3000K	60 W	7200 lm	IND08061-30K
4000K		7500 lm	IND08061-40K
5000K		7800 lm	IND08061-50K

THEOS RACK 90

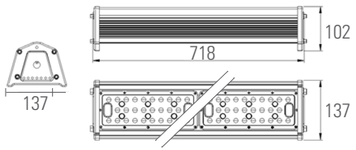

COLOR TEMP.	POWER	LUMENS	CODE
3000K	90 W	11250 lm	IND08064-30K
4000K		11700 lm	IND08064-40K
5000K		12150 lm	IND08064-50K

THEOS RACK 120

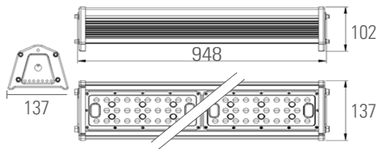

COLOR TEMP.	POWER	LUMENS	CODE
3000K	120 W	15000 lm	IND08067-30K
4000K		15600 lm	IND08067-40K
5000K		16200 lm	IND08067-50K

Similar PRODUCTS



THEOS RACK 60 | THEOS RACK 90 | THEOS RACK 120 | THEOS RACK 150 | THEOS RACK 180 | THEOS RACK 240

THEOS RACK

p.181



100-240 Vac | IP65 | IK10 | CRI >80 | NICHIA SMD LED | 130 lm/W | DIMMABLE **DALI/1-10V** Optional


90° | 120° | 30°x70° | 60°x90° | 40°x130°


Daylight Sensor | **Microwave** Sensor | **ZigBee** Wireless Control


3000K 4000K 5000K

Features



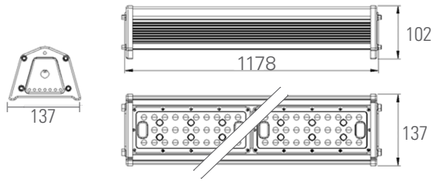





THEOS RACK 150

COLOR TEMP.	POWER	LUMENS	CODE
3000K	150 W	18750 lm	IND08070-30K
4000K		19500 lm	IND08070-40K
5000K		20250 lm	IND08070-50K

THEOS RACK 180

COLOR TEMP.	POWER	LUMENS	CODE
3000K	180 W	22500 lm	IND08073-30K
4000K		23400 lm	IND08073-40K
5000K		24300 lm	IND08073-50K

THEOS RACK 240

COLOR TEMP.	POWER	LUMENS	CODE
3000K	240 W	30000 lm	IND08076-30K
4000K		31200 lm	IND08076-40K
5000K		32400 lm	IND08076-50K

Similar PRODUCTS



THEOS RACK 60 | THEOS RACK 90 | THEOS RACK 120 | THEOS RACK 150 | THEOS RACK 180 | THEOS RACK 240

LED GUIDE 2023

SWITCH MADE LED SOLUTIONS

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING



KALOU



CRUG



CANNON



POWO



KUBI



KIKEX



PIKI



LIGO




KOOKI


- KALOU 12 
- KALOU 36 
- KALOU 90 
- KALOU 180 

www.switch-made.com

KALOU STRUCTURE

p.183

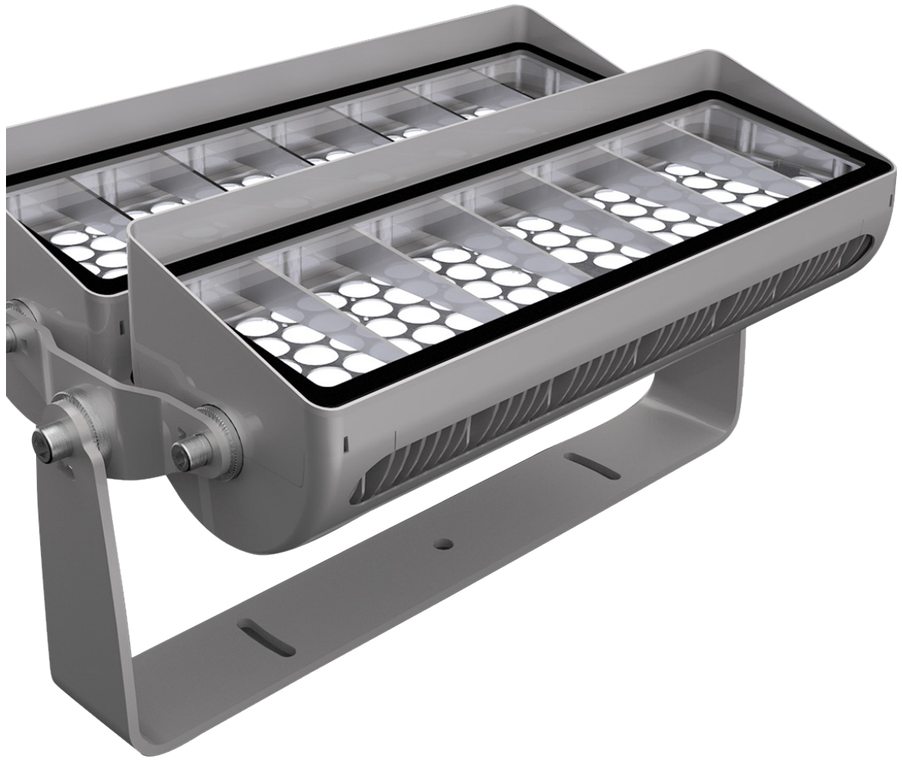

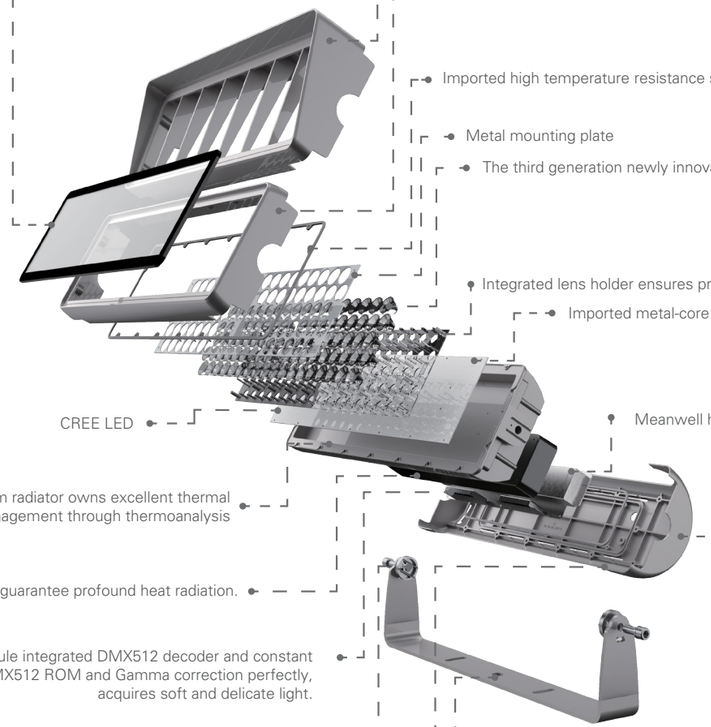

KALOU 12


p.184




100-305 Vac	IP66	IK08	CRI >80	RGBW	DMX512	CREE XP-L LED (Monocolor)	CREE XM-L LED (RGBW 4 in 1)


RGBW Color


512 DMX Control Mode



KALOU 12 **KALOU 12 RGBW**







KALOU 12

COLOR TEMP.	LED QTY.	POWER	LUMENS	CODE
2700K	12 pcs.	56 W	4370 lm	EXT04042-27K
3000K			4480 lm	EXT04042-30K
4000K			4650 lm	EXT04042-40K

KALOU 12 RGBW

COLOR	LED QTY.	POWER	CODE
RGBW	12 pcs. RGBW 4 in 1	72 W	EXT04044-RGBW

2700K 3000K 4000K 5000K 6000K

Features





KALOU structure

Similar Products » KALOU



KALOU 12 KALOU 36 KALOU 90 KALOU 180

KALOU 36

p.185



2700K 3000K 4000K 5000K 6000K

Features






KALOU structure

Similar Products » KALOU




KALOU 12 | KALOU 36 | KALOU 90 | KALOU 180


100-305 Vac | IP66 | IK08 | CRI >80 | RGBW | DMX512 | CREE XP-E2 LED (Monocolor) | CREE XM-L LED (RGBW 4 in 1)




RGBW Color

512 DMX Control Mode







KALOU 36

COLOR TEMP.	LED QTY.	POWER	LUMENS	CODE
2700K	36 pcs.	160 W	12510 lm	EXT04037-27K
3000K			12800 lm	EXT04037-30K
4000K			13310 lm	EXT04037-40K

KALOU 36 RGBW

COLOR	LED QTY.	POWER	CODE
RGBW	36 pcs. 9R 9G 9B 9W	90 W	EXT04039-RGBW

KALOU 18 RGBW (Optional)

COLOR	LED QTY.	POWER	CODE
RGBW	18 pcs. RGBW 4 in 1	150 W	EXT04040-RGBW

KALOU 90

p.186



2700K 3000K 4000K 5000K 6000K


Features






KALOU structure


100-305 Vac | IP66 | IK08 | CRI >80 | RGBW | DMX512 | CREE XP-E2 LED (Monocolor) | CREE XM-L LED (RGBW 4 in 1)



RGBW Color

512 DMX Control Mode







KALOU 90

COLOR TEMP.	LED QTY.	POWER	LUMENS	CODE
2700K	90 pcs.	300 W	23400 lm	EXT04027-27K
3000K			24000 lm	EXT04027-30K
4000K			24960 lm	EXT04027-40K

KALOU 90 RGBW

COLOR	LED QTY.	POWER	CODE
RGBW	90 pcs. 24R 24G 24B 18W	210 W	EXT04029-RGBW

KALOU 40 RGBW (Optional)

COLOR	LED QTY.	POWER	CODE
RGBW	40 pcs. RGBW 4 in 1	360 W	EXT04030-RGBW

Similar Products » KALOU



KALOU 12 | KALOU 36 | KALOU 90 | KALOU 180

KALOU 180

p.187



2700K 3000K 4000K 5000K 6000K

Features






KALOU structure


100-305 Vac	IP66	IK08	CRI >80	RGBW	DMX512	CREE XP-E2 LED (Monocolor)	CREE XM-L LED (RGBW 4 in 1)


3° 12° 20° 30° 60° 10°x70° 5°x20°

RGBW Color

512 DMX Control Mode







KALOU 180

COLOR TEMP.	LED QTY.	POWER	LUMENS	CODE
2700K	180 pcs.	600 W	45120 lm	EXT04022-27K
3000K			48000 lm	EXT04022-30K
4000K			49920 lm	EXT04022-40K

KALOU 180 RGBW

COLOR	LED QTY.	POWER	CODE
RGBW	180 pcs. 48R 48G 48B 36W	420 W	EXT04024-RGBW

KALOU 80 RGBW (Optional)

COLOR	LED QTY.	POWER	CODE
RGBW	80 pcs. RGBW 4 in 1	720 W	EXT04025-RGBW

Similar Products » KALOU



KALOU 12 | KALOU 36 | KALOU 90 | KALOU 180

Next...

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING



KALOU



CRUG



CANNON



POWO



KUBI



KIKEX



PIKI



LIGO



KOOKI


- CRUG 4
- CRUG 6
- CRUG 9
- CRUG 16
- CRUG 25

CRUG FEATURES

p.189



Control Light Accessories





CRUG 4

p.190

SWITCH MADE LED SOLUTIONS



2700K 3000K 4000K 5000K 6000K


Features



100-305 Vac	IP66	IK08	CRI >80	RGBW	DMX512	CREE XP-L LED (Monocolor)	CREE XM-L LED (RGBW 4 in 1)

RGBW Color


512 DMX Control Mode



CRUG 4



CRUG 4 RGBW



CRUG 4

COLOR TEMP.	LED QTY.	POWER	LUMENS	CODE
2700K	4 pcs.	20 W	1880 lm	EXT04118-27K
3000K			1931 lm	EXT04118-30K
4000K			2008 lm	EXT04118-40K

CRUG 4 RGBW


24Vdc Model

COLOR	LED QTY.	POWER	CODE
RGBW	4 pcs. RGBW 4 in 1	20 W	EXT04120-RGBW




CRUG 4 SPIKE
(OPTIONAL)





CRUG 4 POLE
(OPTIONAL)

Control Light Accessories



Similar Products » CRUG



CRUG 4 | CRUG 6 | CRUG 9 | CRUG 16 | CRUG 25

CRUG 6

p.191


SWITCH MADE LED SOLUTIONS




100-305 Vac	IP66	IK08	CRI >80	RGBW	DMX512	CREE XP-L LED (Monocolor)	CREE XM-L LED (RGBW 4 in 1)	**DALI/0-10V** *Optional*

RGBW Color

512 DMX Control Mode




CRUG 6



CRUG 6 RGBW

2700K 3000K 4000K 5000K 6000K



CRUG 6

COLOR TEMP.	LED QTY.	POWER	LUMENS	CODE
2700K	6 pcs.	30 W	2960 lm	EXT04114-27K
3000K			3036 lm	EXT04114-30K
4000K			3157 lm	EXT04114-40K

CRUG 6 RGBW

24Vdc Model (Optional)

COLOR	LED QTY.	POWER	CODE
RGBW	6 pcs. RGBW 4 in 1	30 W	EXT04116-RGBW


Features




Similar Products » CRUG



CRUG 4 | CRUG 6 | CRUG 9 | CRUG 16 | CRUG 25

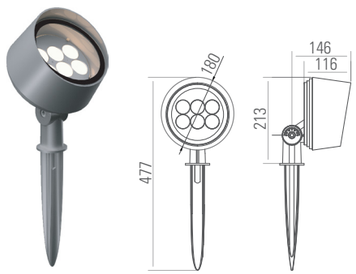


CRUG 6 SPIKE
(OPTIONAL)

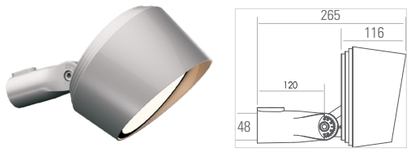

CRUG 6 POLE
(OPTIONAL)

Control Light Accessories



CRUG 9

p.192



2700K 3000K 4000K 5000K 6000K

Features




100-305 Vac	IP66	IK08	CRI >80	RGBW	DMX512	CREE XP-L LED (Monocolor)	CREE XM-L LED (RGBW 4 in 1)	DALI/0-10V Optional

RGBW Color

512 DMX Control Mode




CRUG 9



CRUG 9 RGBW


CRUG 9

COLOR TEMP.	LED QTY.	POWER	LUMENS	CODE
2700K	9 pcs.	45 W	3586 lm	EXT04110-27K
3000K			3669 lm	EXT04110-30K
4000K			3815 lm	EXT04110-40K



CRUG 9 RGBW

COLOR	LED QTY.	POWER	CODE
RGBW	9 pcs. RGBW 4 in 1	60 W	EXT04112-RGBW

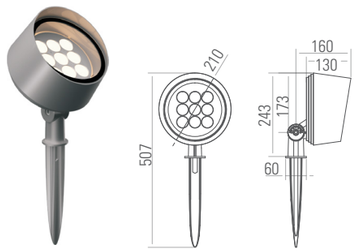


CRUG 9 SPIKE
(OPTIONAL)



CRUG 9 POLE
(OPTIONAL)

Control Light Accessories



Similar Products » CRUG



CRUG 4 | CRUG 6 | CRUG 9 | CRUG 16 | CRUG 25

CRUG 16


p.193




100-305 Vac	IP66	IK08	CRI >80	RGBW	DMX512	CREE XP-L LED (Monocolor)	CREE XM-L LED (RGBW 4 in 1)	**DALI/0-10V** *Optional*

RGBW Color


512 DMX Control Mode



CRUG 16



CRUG 16 RGBW

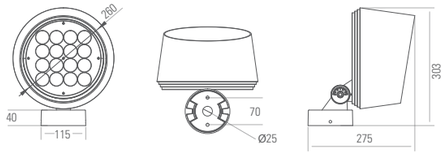

CRUG 16

COLOR TEMP.	LED QTY.	POWER	LUMENS	CODE
2700K	16 pcs.	75 W	7459 lm	EXT04106-27K
3000K			7630 lm	EXT04106-30K
4000K			7935 lm	EXT04106-40K

CRUG 16 RGBW


COLOR	LED QTY.	POWER	CODE
RGBW	16 pcs. RGBW 4 in 1	100 W	EXT04108-RGBW

2700K 3000K 4000K 5000K 6000K


Features



Control Light Accessories







CRUG 16 POLE
(OPTIONAL)

Similar Products » CRUG



CRUG 4 | CRUG 6 | CRUG 9 | CRUG 16 | CRUG 25

CRUG 25

p.194




100-305 Vac	IP66	IK08	CRI >80	RGBW	DMX512	CREE XP-L LED (Monocolor)	CREE XM-L LED (RGBW 4 in 1)	**DALI/0-10V** *Optional*

RGBW Color


512 DMX Control Mode



CRUG 25



CRUG 24 RGBW



CRUG 25

COLOR TEMP.	LED QTY.	POWER	LUMENS	CODE
2700K	25 pcs.	120 W	10790 lm	EXT04102-27K
3000K			11040 lm	EXT04102-30K
4000K			11480 lm	EXT04102-40K

CRUG 24 RGBW


COLOR	LED QTY.	POWER	CODE
RGBW	24 pcs. RGBW 4 in 1	150 W	EXT04104-RGBW

2700K 3000K 4000K 5000K 6000K


Features



Control Light Accessories







CRUG 25 POLE
(OPTIONAL)

Similar Products » CRUG



CRUG 4 | **CRUG 6** | **CRUG 9** | **CRUG 16** | **CRUG 25**

Next...

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING



KALOU



CRUG



CANNON



POWO



KUBI



KIKEX



PIKI



LIGO



KOOKI

- CANNON 1 
- CANNON 3 

www.switch-made.com

CANNON 1

p.196



2700K 3000K 4000K 5000K 6000K

Features



Similar Products » CANNON




CANNON 1 CANNON 3

Next...


	100-264 Vac	IP66	24Vdc (RGBW)	IK08	CRI >80	RGBW	DMX512	CREE XHP35 LED (Monocolor)	CREE XM-L LED (RGBW 4 in 1)

RGBW Color


512 DMX Control Mode



CANNON 1



CANNON 1 RGBW

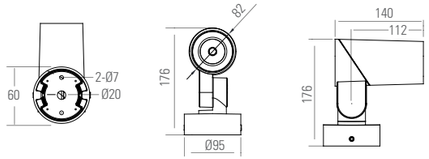


CANNON 1

COLOR TEMP.	LED QTY.	POWER	LUMENS	CODE
2700K	1 pcs.	10 W	840 lm	EXT04126-27K
3000K			860 lm	EXT04126-30K
4000K			894 lm	EXT04126-40K


CANNON 1 RGBW

24Vdc
Remote Driver

COLOR	LED QTY.	POWER	CODE
RGBW	1 pcs. RGBW 4 in 1	8 W	EXT04128-RGBW



CANNON 1 SPIKE
(OPTIONAL)

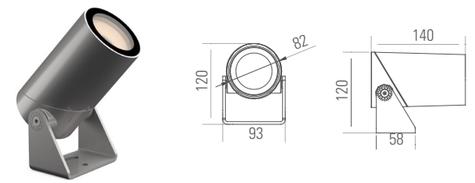

CANNON 1 BRACKET
(OPTIONAL)

CANNON 3


p.197




	100-264 Vac	IP66	24Vdc (RGBW)	IK08	CRI >80	RGBW	DMX512	CREE XP-G3 LED (Monocolor)	CREE XM-L LED (RGBW 4 in 1)	**DALI/0-10V** *Optional*

RGBW Color

512 DMX Control Mode



CANNON 3



CANNON 3 RGBW

2700K 3000K 4000K 5000K 6000K


Features



Similar Products » CANNON



CANNON 1 **CANNON 3**

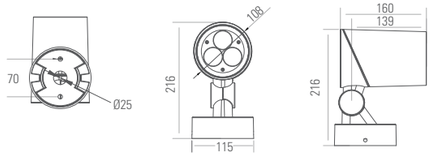


CANNON 3

COLOR TEMP.	LED QTY.	POWER	LUMENS	CODE
2700K	3 pcs.	15 W	1369 lm	EXT04122-27K
3000K			1401 lm	EXT04122-30K
4000K			1457 lm	EXT04122-40K


CANNON 3 RGBW

24Vdc Remote Driver


COLOR	LED QTY.	POWER	CODE
RGBW	3 pcs. RGBW 4 in 1	12 W	EXT04124-RGBW



CANNON 3 SPIKE
(OPTIONAL)



CANNON 3 POLE
(OPTIONAL)



CANNON 3 BRACKET
(OPTIONAL)

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING



KALOU



CRUG



CANNON



POWO



KUBI



KIKEX



PIKI



LIGO



KOOKI

POWO




www.switch-made.com

POWO

p.199




100-240 Vac	IP66	IK08	135 lm/W	CRI >70/>80	NICHIA SMD LED	PF >0.93	**DALI** *Optional*



3000K 4000K 5000K


Features



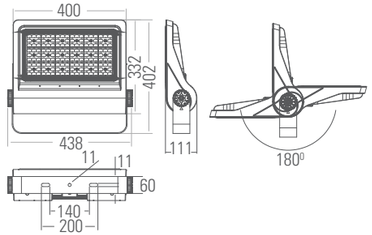



POWO

COLOR TEMP.	POWER	LUMENS	CODE
5000K	100 W	13500 lm	EXT13010-50K
5000K	150 W	20250 lm	EXT13013-50K
5000K	200 W	27000 lm	EXT13016-50K
5000K	240 W	32400 lm	EXT13019-50K

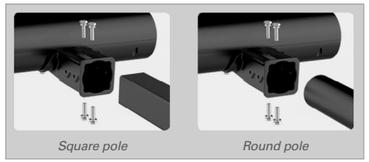

Mounting sleeve
compactible for both square & round pole.








SLIP FITTER

(OPTIONAL)



Better heat dissipation



Adjustable knob



Billboard Lighting



Flood Lighting

Similar Products » POWO



POWO

Next...

LED GUIDE 2023

SWITCH MADE LED SOLUTIONS

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING



KALOU



CRUG



CANNON



POWO



KUBI



KIKEX



PIKI



LIGO



KOOKI

- KUBI 9 
- KUBI 18 
- KUBI 36 

www.switch-made.com


KUBI 9

p.201



220-240 Vac | IP65 | IK08 | 80 lm/W | RGB (Optional)

8° 15° 30° 45°

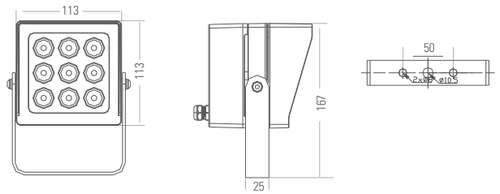

KUBI 9

COLOR TEMP.	LED QTY.	POWER	LUMENS	CODE
3000K	9 pcs.	19 W	1530 lm	EXT04207-30K
4000K			1568 lm	EXT04207-40K
6000K			1634 lm	EXT04207-60K

3000K 4000K 6000K

Features



Similar Products » KUBI



KUBI 9 | KUBI 18 | KUBI 36


Next...


KUBI 18


p.202




220-240 Vac	IP65	IK08	80 lm/W	RGB (Optional)









KUBI 18

COLOR TEMP.	LED QTY.	POWER	LUMENS	CODE
3000K	18 pcs.	38 W	3100 lm	EXT04205-30K
4000K			3173 lm	EXT04205-40K
6000K			3306 lm	EXT04205-60K

3000K 4000K 6000K

Features



Similar Products » KUBI



KUBI 9 | KUBI 18 | KUBI 36


KUBI 36


p.203




220-240 Vac | IP65 | IK08 | 80 lm/W | RGB (optional)

8º | 15º | 30º | 45º







KUBI 36

COLOR TEMP.	LED QTY.	POWER	LUMENS	CODE
3000K	36 pcs.	75 W	6000 lm	EXT04202-30K
4000K			6150 lm	EXT04202-40K
6000K			6400 lm	EXT04202-60K

3000K 4000K 6000K

Features



Similar Products » KUBI


KUBI 9


KUBI 18


KUBI 36

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING



KALOU



CRUG



CANNON



POWO



KUBI



KIKEX



PIKI



LIGO



KOOKI

- KIKEX 4 
- KIKEX 9 


www.switch-made.com

KIKEX


p.205



220-240 Vac | IP65 | IK08 | CREE XP-E LED | **24Vdc Model** (Optional)




KIKEX 9 **KIKEX 4**



KIKEX 4

COLOR TEMP.	LED QTY.	POWER	LUMENS	CODE
2700K	4 pcs.	12 W	1128 lm	EXT04214-27K
3000K			1152 lm	EXT04214-30K
4000K			1200 lm	EXT04214-40K



KIKEX 9

COLOR TEMP.	LED QTY.	POWER	LUMENS	CODE
2700K	9 pcs.	18 W	1690 lm	EXT04211-27K
3000K			1728 lm	EXT04211-30K
4000K			1800 lm	EXT04211-40K

2700K 3000K 4000K 5000K 6000K

Features



KIKEX 9 KIKEX 4

Similar Products » KIKEX



KIKEX 4 KIKEX 9

Next...

LED GUIDE 2023

SWITCH MADE LED SOLUTIONS

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING



KALOU



CRUG



CANNON



POWO



KUBI



KIKEX



PIKI



LIGO



KOOKI

- PIKI 33 
- PIKI 42 
- PIKI 55 
- PIKI 69 
- PIKI 85 

www.switch-made.com

PIKI

p.207





IP66 | IK04 | CRI >80 | CREE LED



PIKI 33 SPIKE
ACC99045


OPTIONAL ACCESSORIES





PIKI 42 SPIKE
ACC99046

OPTIONAL ACCESSORIES



PIKI 33

24Vdc

5° 8° 10° 12° 17° 25° 40° 60°

COLOR TEMP.	POWER	LUMENS	CODE
2700K	2W	160 lm	EXT19090-27K
3000K		170 lm	EXT19090-30K
4000K		176 lm	EXT19090-40K

PIKI 42

220-240Vac

15° 24° 36° 60°

COLOR TEMP.	POWER	LUMENS	CODE
2700K	4W	320 lm	EXT19091-27K
3000K		340 lm	EXT19091-30K
4000K		352 lm	EXT19091-40K



PIKI 42 CYLINDRICAL HOOD
EXT19092



PIKI 42 CYLINDRICAL HOOD 45D
EXT19103

OPTIONAL

2700K 3000K 4000K 5000K

Features


PIKI 33


PIKI 42

Similar Products » PIKI


PIKI 33


PIKI 42


PIKI 55


PIKI 69


PIKI 85

PIKI

p.208





220-240 Vac | IP66 | IK04 | CRI >80 | CREE LED

15° 24° 36° 60°

PIKI 55

COLOR TEMP.	POWER	LUMENS	CODE
2700K	7W	560 lm	EXT19094-27K
3000K		595 lm	EXT19094-30K
4000K		616 lm	EXT19094-40K





PIKI 55 SPIKE
ACC99046

OPTIONAL ACCESSORIES



PIKI 55 CYLINDRICAL HOOD
EXT19095



PIKI 55 CYLINDRICAL HOOD 45D
EXT19096

OPTIONAL

2700K 3000K 4000K 5000K

Features



PIKI 55

Similar Products » PIKI



PIKI 33 | PIKI 42 | PIKI 55 | PIKI 69 | PIKI 85

PIKI

p.209



220-240 Vac | IP66 | IK04 | CRI >80 | CREE LED

2700K 3000K 4000K 5000K

Features




PIKI 69

Similar Products » PIKI




PIKI 33 | PIKI 42 | PIKI 55 | PIKI 69 | PIKI 85



PIKI 69 SPIKE
ACC99046

OPTIONAL ACCESSORIES



PIKI 69

15° 24° 36° 60°

COLOR TEMP.	POWER	LUMENS	CODE
2700K	10W	800 lm	EXT19097-27K
3000K		850 lm	EXT19097-30K
4000K		880 lm	EXT19097-40K



PIKI 69 CYLINDRICAL HOOD
EXT19098



PIKI 69 CYLINDRICAL HOOD 45D
EXT19099

OPTIONAL

PIKI

p.210




220-240 Vac | IP66 | IK04 | CRI >80 | CREE LED

15° 24° 36° 60°

PIKI 85

COLOR TEMP.	POWER	LUMENS	CODE
2700K	15W	1200 lm	EXT19100-27K
3000K		1275 lm	EXT19100-30K
4000K		1320 lm	EXT19100-40K




2700K 3000K 4000K 5000K

Features



PIKI 69



PIKI 85 SPIKE
ACC99046

OPTIONAL ACCESSORIES



PIKI 85 CYLINDRICAL HOOD
EXT19101



PIKI 85 CYLINDRICAL HOOD 45D
EXT19102

OPTIONAL

Similar Products » PIKI



PIKI 33 | PIKI 42 | PIKI 55 | PIKI 69 | PIKI 85

Next...

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING



KALOU



CRUG



CANNON



POWO



KUBI



KIKEX



PIKI



LIGO



KOOKI

- LIGO 1 
- LIGO 3 
- LIGO 7 

www.switch-made.com

LIGO


p.212




100-240 Vac | IP66 | IK08 | CRI >80 | CREE XP-E2 LED









LIGO 1

COLOR TEMP.	LED QTY.	POWER	LUMENS	CODE
2700K	1 pcs.	3 W	162 lm	EXT04308-27K
3000K			177 lm	EXT04308-30K
4000K			200 lm	EXT04308-40K

2700K 3000K 4000K 5000K 6000K

Features



Similar Products » LIGO



LIGO 1



LIGO 3



LIGO 7



LIGO 1 SPIKE

(OPTIONAL)



LIGO 1 U-BRACKET

(OPTIONAL)

LIGO

p.213




100-240 Vac | IP66 | IK08 | CRI >80 | CREE XP-E2 LED

5° 12° 20° 30° 45° 60° 15°x30° 10°x60°

2700K 3000K 4000K 5000K 6000K




Features



LIGO 3

COLOR TEMP.	LED QTY.	POWER	LUMENS	CODE
2700K	3 pcs.	6 W	408 lm	EXT04305-27K
3000K			432 lm	EXT04305-30K
4000K			462 lm	EXT04305-40K

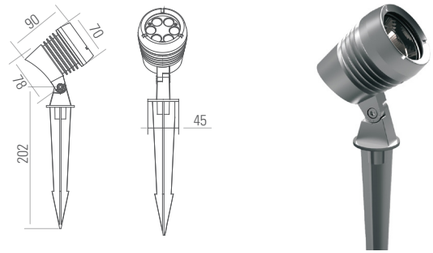

LIGO 3 SPIKE

(OPTIONAL)

Similar Products » LIGO



LIGO 1 | LIGO 3 | LIGO 7


LIGO

p.214



100-240 Vac | IP66 | IK08 | CRI >80 | CREE XP-E2 LED

5° 12° 20° 30° 45° 60° 15°x30° 10°x60°




LIGO 7

COLOR TEMP.	LED QTY.	POWER	LUMENS	CODE
2700K	7 pcs.	16 W	1040 lm	EXT04302-27K
3000K			1120 lm	EXT04302-30K
4000K			1216 lm	EXT04302-40K

2700K 3000K 4000K 5000K 6000K



Features

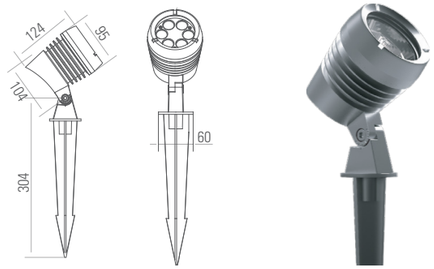

LIGO 7 SPIKE

(OPTIONAL)

Similar Products » LIGO



LIGO 1 | LIGO 3 | LIGO 7

Next...

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING



KALOU



CRUG



CANNON



POWO



KUBI



KIKEX



PIKI



LIGO



KOOKI

- KOOKI 10 
- KOOKI 20 
- KOOKI 30 
- KOOKI 50 

www.switch-made.com

KOOKI

p.216

SWITCH MADE LED SOLUTIONS



100-240 Vac	IP65	IK08	PF >0.9	90 lm/W	CRI >80	SMD 2835 LED	120°

Motion Sensor

2700K 3000K 4000K 5000K 6000K

Features





KOOKI 10 KOOKI 20 KOOKI 30 KOOKI 50


Similar PRODUCTS




KOOKI









KOOKI 10

COLOR TEMP.	POWER	LUMENS	CODE
3000K	10 W	850 lm	EXT14039-30K
4000K		880 lm	EXT14039-40K
5000K		900 lm	EXT14039-50K

KOOKI 20

COLOR TEMP.	POWER	LUMENS	CODE
3000K	20 W	1700 lm	EXT14042-30K
4000K		1760 lm	EXT14042-40K
5000K		1800 lm	EXT14042-50K

KOOKI 30

COLOR TEMP.	POWER	LUMENS	CODE
3000K	30 W	2550 lm	EXT14162-30K
4000K		2640 lm	EXT14162-40K
5000K		2700 lm	EXT14162-50K

KOOKI 50

COLOR TEMP.	POWER	LUMENS	CODE
3000K	50 W	4250 lm	EXT14165-30K
4000K		4400 lm	EXT14165-40K
5000K		4500 lm	EXT14165-50K

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING



TECK



PIXEL-X



LINY



COVEX

- TECK 24 
- TECK 36 
- TECK 48 
- TECK 54 
- TECK 72 

www.switch-made.com

TECK

p.218




220-240 Vac | IP67 | IK08 | CREE LED | CRI >80 | RGBW (Optional) | **24Vdc Model** (Optional)

3º 20º 30º 60º 60ºx10º

RGB

Color

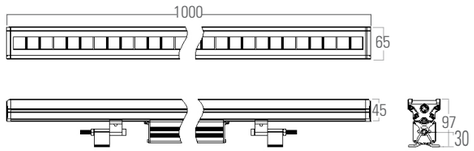

2700K 3000K 4000K 5000K 6000K 6500K

Features



TECK 24

COLOR TEMP.	LED QTY.	POWER	LUMENS	CODE
2700K	24 pcs.	24 W	2040 lm	EXT12057-27K
3000K			2110 lm	EXT12057-30K
4000K			2160 lm	EXT12057-40K
RGB			-	EXT12071-RGB
RGBW			-	EXT12076-RGBW

TECK 36

COLOR TEMP.	LED QTY.	POWER	LUMENS	CODE
2700K	24 pcs.	36 W	3060 lm	EXT12054-27K
3000K			3168 lm	EXT12054-30K
4000K			3240 lm	EXT12054-40K
RGB			-	EXT12072-RGB
RGBW			-	EXT12055-RGBW

TECK 48

COLOR TEMP.	LED QTY.	POWER	LUMENS	CODE
2700K	24 pcs.	48 W	4085 lm	EXT19052-27K
3000K			4176 lm	EXT19052-30K
4000K			4296 lm	EXT19052-40K
RGB			-	EXT19053-RGB
RGBW			-	EXT19054-RGBW

Similar Products » TECK



TECK 24 | TECK 36 | TECK 48 | TECK 54 | TECK 72

Next...


TECK

p.219

SWITCH MADE LED SOLUTIONS



	220-240 Vac	IP67	IK08	CREE LED	CRI >80	RGBW (Optional)	**24Vdc Model** (Optional)	3° / RGB Color

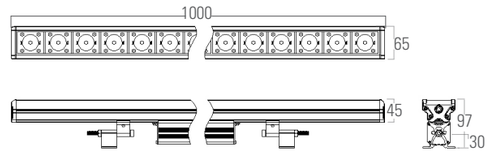

2700K 3000K 4000K 5000K 6000K

Features



Similar Products » TECK



TECK 24 | TECK 36 | TECK 48 | TECK 54 | TECK 72

Next...

TECK 54

COLOR TEMP.	LED QTY.	POWER	LUMENS	CODE
2700K	18 pcs.	54 W	5130 lm	EXT12052-27K
3000K			5184 lm	EXT12052-30K
4000K			5292 lm	EXT12052-40K
RGB			-	EXT12073-RGB
RGBW			-	EXT12074-RGBW

TECK 72

COLOR TEMP.	LED QTY.	POWER	LUMENS	CODE
2700K	24 pcs.	72 W	6300 lm	EXT19058-27K
3000K			6760 lm	EXT19058-30K
4000K			6912 lm	EXT19058-40K
RGB			-	EXT19059-RGB
RGBW			-	EXT19051-RGBW

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING



TECK



PIXEL-X



LINY



COVEX

PIXEL-X



www.switch-made.com

PIXEL-X

p.221




24Vdc | IP65 | IK07 | CRI >80 | 100lm/W | CREE SMD5050 | DALI / 0-10V TRIAC DMX 512 ON/OFF | INBUILT DMX DECODER

45° 60° 90°

BEAM ANGLE

RGB RGBW



PIXEL-X

COLOR TEMP.	POWER / LED QTY	LUMENS	CODE
2700K	12 W 48 LEDs	1230 lm	EXT12062
3000K		1260 lm	
RGB (3in1) /RGBW (4in1)		600 lm (average)	

COLOR TEMP.	POWER / LED QTY	LUMENS	CODE
RGB (3in1) /RGBW (4in1)	15 W/60 LEDs	750 lm	

Finish: Stainless Steel

Features




6 LEDs = 1 Pixel (Total 48 LEDs = 8 pixels)



Pixel Quantity:
Standard = 8 pixels
Optional pixel: 1 pixel | 2 pixels | 4 pixels | 6 pixels

Adjustable Mounting Bracket



Similar PRODUCTS



TECK | PIXEL - X | LINY | COVEX

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING



TECK



PIXEL-X



LINY



COVEX

- LINY 18 
- LINY 24 
- LINY 30 

www.switch-made.com

LINY


p.223



220-240 Vac | IP67 | IK07 | CRI >80 | CREE LED | **24Vdc Model** (Optional) | RGBW (Optional)

15° 30° 40° 60° 10°x65°

Color



2700K 3000K 4000K 5000K 6000K 6500K

Features



LINY 18

COLOR TEMP.	LED QTY.	POWER	LUMENS	CODE
2700K	18 pcs.	18 W	1530 lm	EXT12031-27K
3000K			1584 lm	EXT12031-30K
4000K			1630 lm	EXT12031-40K

LINY 24

COLOR TEMP.	LED QTY.	POWER	LUMENS	CODE
2700K	24 pcs.	24 W	2000 lm	EXT12034-27K
3000K			2110 lm	EXT12034-30K
4000K			2160 lm	EXT12034-40K

LINY 30

COLOR TEMP.	LED QTY.	POWER	LUMENS	CODE
2700K	30 pcs.	30 W	2460 lm	EXT12037-27K
3000K			2550 lm	EXT12037-30K
4000K			2640 lm	EXT12037-40K



Similar PRODUCTS



TECK | PIXEL - X | LINY | COVEX

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING



TECK



PIXEL-X



LINY



COVEX

- COVEX 300
- COVEX 1200
- COVEX 1800

COVEX


p.225




3000K 4000K 5000K

Features





120-277 Vac	IP66	IK07	CRI > 85	105 lm/W	DIMMABLE **1-10V**



COVEX 300

DIMENSION	COLOR TEMP.	POWER	LUMENS	CODE
L 300	3000K	10 W	990 lm	EXT12020-30K
	4000K		1050 lm	EXT12020-40K

COVEX 1200

DIMENSION	COLOR TEMP.	POWER	LUMENS	CODE
L 1194	3000K	40 W	3950 lm	EXT12022-30K
	4000K		4200 lm	EXT12022-40K

COVEX 1800

DIMENSION	COLOR TEMP.	POWER	LUMENS	CODE
L 1778	3000K	60 W	6000 lm	EXT12024-30K
	4000K		6300 lm	EXT12024-40K


Similar PRODUCTS




TECK | PIXEL - X | LINY | COVEX



Tiltable



Easy to install



No dark-spot at linking point



Flexible corner interconnection

Optional accessories (to be ordered separately)	Soft connector (0.3m)	Input cable (1.5m)

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING



CEILING RECESSED



SUSPENDED

- STILLA 
- STRONG 

www.switch-made.com


STILLA

p.227



700mA | IP65 | IK07 | CRI >82 | LUMILEDS LED

12° 24° 36°





STILLA 2

COLOR TEMP.	POWER	LUMENS	CODE
2700K	2 W	140 lm	INT03042-27K
3000K		150 lm	INT03042-30K
4000K		165 lm	INT03042-40K

2700K 3000K 4000K

Features



Trim: *White (WH), Black (BK)*

Reflector: *White (WH), Black (BK), Gold (GD)*



WH-BK | WH-WH | WH-GD | BK-GD

Similar Products » STILLA



STILLA 2 | STILLA 3 | STILLA 7 | STILLA 10


STILLA

p.228




IK07


CRI >90




STILLA 3 | STILLA 7 / 10

2700K 3000K 4000K 5000K







STILLA 3

LUMINUS V6 LED | IP65 | **350mA CC** Remote Driver

COLOR TEMP.	POWER	LUMENS	CODE
2700K	3 W	256 lm	INT03045-27K
3000K		264 lm	INT03045-30K
4000K		278 lm	INT03045-40K

STILLA 7

CITIZEN COB LED | IP65 | **350mA CC** Remote Driver

COLOR TEMP.	POWER	LUMENS	CODE
2700K	7 W	420 lm	INT03048-27K
3000K		446 lm	INT03048-30K
4000K		500 lm	INT03048-40K

STILLA 10

CITIZEN COB LED | IP54 | **500mA CC** Remote Driver


COLOR TEMP.	POWER	LUMENS	CODE
2700K	10 W	720 lm	INT03052-27K
3000K		750 lm	INT03052-30K
4000K		800 lm	INT03052-40K

Features



STILLA 3 | STILLA 7 | STILLA 10

Similar Products » STILLA

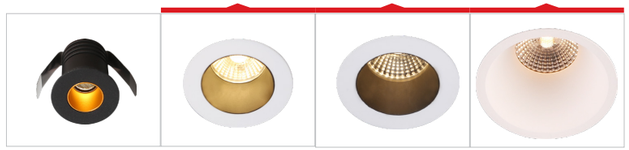

STILLA 2 | STILLA 3 | STILLA 7 | STILLA 10

Next...

STRONG

p.229



220-240 Vac | IP65 | IK06 | CRI >90 | PF >0.9 | **DALI/1-10V** *Optional*


24° 36° 50°

2700K 3000K 4000K 5000K 6500K



STRONG 92

COLOR TEMP.	POWER	LUMENS	CODE
3000K	15 W	1067 lm	EXT19028-30K
4000K		1110 lm	EXT19028-40K
5000K		1180 lm	EXT19028-50K



STRONG 123

COLOR TEMP.	POWER	LUMENS	CODE
3000K	25 W	2528 lm	EXT19057-30K
4000K		2640 lm	EXT19057-40K
5000K		2760 lm	EXT19057-50K

Features



STRONG 92 STRONG 123

Similar Products » STRONG



STRONG

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING



CEILING RECESSED



SUSPENDED

- CYLI-I 
- CYLI-II 


www.switch-made.com


CYLI


p.231



100-240 Vac | IP65 | IK08 | CRI >80/>95 | CREE COB LED







CYLI-I 15W

CREE CXA1512

COLOR TEMP.	POWER	LUMENS	CODE
3000K	15 W	1319 lm	EXT05131-30K
4000K		1350 lm	EXT05131-40K

CYLI-I 20W

CREE CXA2520

COLOR TEMP.	POWER	LUMENS	CODE
3000K	20 W	2254 lm	EXT05133-30K
4000K		2372 lm	EXT05133-40K

CYLI-II 15W

CREE CXA1512

COLOR TEMP.	POWER	LUMENS	CODE
3000K	15 W	1319 lm	EXT05135-30K
4000K		1350 lm	EXT05135-40K

CYLI-II 20W

CREE CXA2520

COLOR TEMP.	POWER	LUMENS	CODE
3000K	20 W	2254 lm	EXT05137-30K
4000K		2372 lm	EXT05137-40K

3000K 4000K 5000K

Features



CYLI - I 15W | CYLI - I 20W | CYLI - II 15W | CYLI - II 20W

Similar PRODUCTS



CYLI

LED GUIDE 2023

SWITCH MADE LED SOLUTIONS

INDOOR


- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING



WALL RECESSED



WALL MOUNTED

- IROUND - X 
- ISQUARE - X 
- MARKI 
- CUBIX 
- RONDIX 


www.switch-made.com

IROUND-X / ISQUARE-X

p.233




230 Vac | IP65 | CRI >80 | PF >0.9 | 120°



IROUND-X

COLOR TEMP.	POWER	LUMENS	CODE
3000K	1.2 W	80 lm	INT03071-30K



ISQUARE-X

COLOR TEMP.	POWER	LUMENS	CODE
3000K	1.2 W	80 lm	INT03074-30K


2700K 3000K 4000K 5000K

Features



IROUND-X ISQUARE-X

Similar » CATEGORY

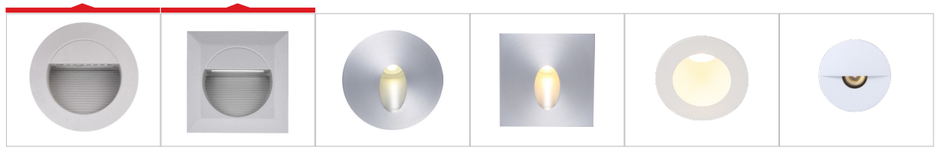

IROUND-X | ISQUARE-X | MUIRA - R | MUIRA - S | PERLE | MARKI

MUIRA - PERLE - MARKI

p.234



350 / 700mA | CRI >82 | LUMILEDS LED


2700K 3000K 4000K

Features




MUIRA - R | MUIRA - S | PERLE | MARKI


Similar » CATEGORY

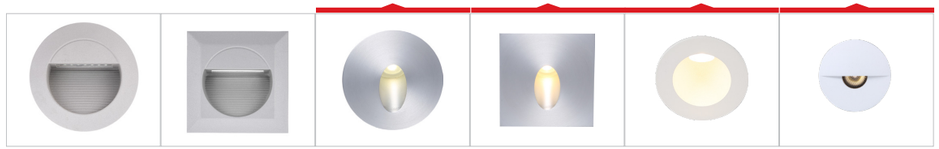


IROUND-X | ISQUARE-X | MUIRA - R | MUIRA - S | PERLE | MARKI









MUIRA-R

700mA CC Remote Driver | IP54

COLOR TEMP.	POWER	LUMENS	CODE
2700K	2 W	120 lm	INT01514-27K
3000K		130 lm	INT01514-30K

MUIRA-S

700mA CC Remote Driver | IP54

COLOR TEMP.	POWER	LUMENS	CODE
2700K	2 W	120 lm	INT01516-27K
3000K		130 lm	INT01516-30K

PERLE

350mA CC Remote Driver | IP54

COLOR TEMP.	POWER	LUMENS	CODE
2700K	1 W	90 lm	INT01518-27K
3000K		110 lm	INT01518-30K

MARKI

700mA CC Remote Driver | IP65

COLOR TEMP.	POWER	LUMENS	CODE
2700K	2 W	116 lm	INT01520-27K
3000K		120 lm	INT01520-30K

CUBIX

p.235



2700K 3000K 4000K

Features




Similar >> CATEGORY



CUBIX RONDIX

200-240Vac | CRI >80 | IP65 | IK08

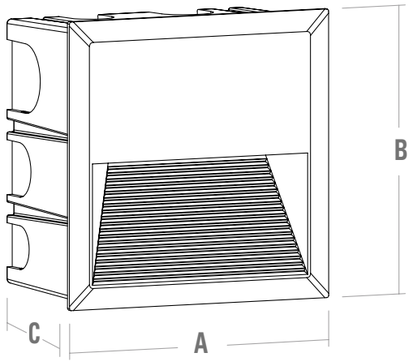



CUBIX WALL MOUNTED

(OPTIONAL)

CUBIX 2713

266x133

COLOR TEMP.	POWER	LUMENS	CODE
2700K	10 W	340 lm	EXT20169-27K
3000K		349 lm	EXT20169-30K
4000K		366 lm	EXT20169-40K

CUBIX 2020

195x195

COLOR TEMP.	POWER	LUMENS	CODE
2700K	8 W	240 lm	EXT20167-27K
3000K		246 lm	EXT20167-30K
4000K		258 lm	EXT20167-40K

CUBIX 1320

130x196

COLOR TEMP.	POWER	LUMENS	CODE
2700K	5 W	130 lm	EXT20168-27K
3000K		133 lm	EXT20168-30K
4000K		140 lm	EXT20168-40K

CUBIX 1313

130x130


COLOR TEMP.	POWER	LUMENS	CODE
2700K	5 W	130 lm	EXT20166-27K
3000K		133 lm	EXT20166-30K
4000K		140 lm	EXT20166-40K

RONDIX

p.236



200-240Vac | CRI >80 | IP65 | IK08

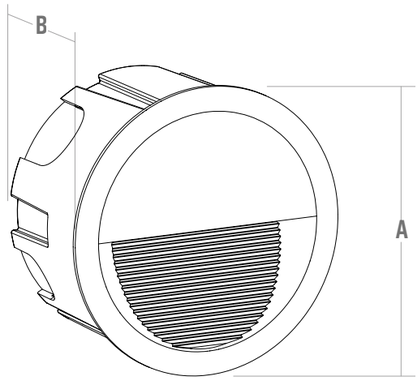

RONDIX 202

196x78

COLOR TEMP.	POWER	LUMENS	CODE
2700K	8 W	240 lm	EXT20165-27K
3000K		246 lm	EXT20165-30K
4000K		258 lm	EXT20165-40K

RONDIX 135

130x78

COLOR TEMP.	POWER	LUMENS	CODE
2700K	5 W	130 lm	EXT20164-27K
3000K		133 lm	EXT20164-30K
4000K		140 lm	EXT20164-40K

2700K 3000K 4000K

Features





RONDIX WALL MOUNTED

(OPTIONAL)

Similar » CATEGORY



CUBIX

RONDIX

INDOOR


- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING



WALL RECESSED



WALL MOUNTED

- SAK 
- SAK MINI 
- S-TUBE 
- B-TUBE 
- SILL 
- ALTER 
- HUBI 

www.switch-made.com


SAK

p.238



100-240 Vac | IP65 | IK10 | CRI >80 | NICHIA LED NF2X757XR | 130 lm/W | DIMMABLE **1-10V** *Optional*

Asymm.



3000K 4000K 5000K

Features



SAK 40

COLOR TEMP.	POWER	LUMENS	CODE
3000K	40 W	4960 lm	EXT06070-30K
4000K		5080 lm	EXT06070-40K
5000K		5200 lm	EXT06070-50K

SAK 70

COLOR TEMP.	POWER	LUMENS	CODE
3000K	70 W	8850 lm	EXT06073-30K
4000K		8960 lm	EXT06073-40K
5000K		9100 lm	EXT06073-50K

Similar PRODUCT



SAK

SAK MINI

SAK MINI


p.239

SWITCH MADE LED SOLUTIONS



100-240 Vac	IP66	IK10	CRI >70	OSRAM	125 lm/W

45°x150°



SAK MINI 20

COLOR TEMP.	POWER	LUMENS	CODE
4000K	20 W	2300 lm	EXT06076-40K
5000K		2500 lm	EXT06076-50K

SAK MINI 30


COLOR TEMP.	POWER	LUMENS	CODE
4000K	30 W	3550 lm	EXT06077-40K
5000K		3750 lm	EXT06077-50K

3000K 4000K 5000K

Features











Similar PRODUCT



SAK



SAK MINI

Next...

S-TUBE

p.240



3000K 4000K 5000K

Features




S-TUBE S-TUBE - I S-TUBE - II

Similar » CATEGORY



SAK S-TUBE B-TUBE SILL ALTER HUBI

100-240 Vac | IP65 | IK08 | CRI >80/>95 | CREE COB CXA1304 (4 W / 6 W) | CREE COB CXA1507 (8 W) | CREE COB CXA1512 (15 W)




STAINLESS STEEL 316L MIRROR FINISH



S-TUBE 316L SS
MIRROR FINISH
(OPTIONAL)








S-TUBE-I 316L SS
MIRROR FINISH
(OPTIONAL)








S-TUBE-II 316L SS
MIRROR FINISH
(OPTIONAL)





S-TUBE

COLOR TEMP.	POWER	LUMENS	CODE
3000K	6 W	543 lm	EXT05100-30K
4000K		552 lm	EXT05100-40K
3000K	15 W	1341 lm	EXT05102-30K
4000K		1380 lm	EXT05102-40K

S-TUBE-I

COLOR TEMP.	POWER	LUMENS	CODE
3000K	6 W	543 lm	EXT05104-30K
4000K		552 lm	EXT05104-40K
3000K	15 W	1341 lm	EXT05106-30K
4000K		1380 lm	EXT05106-40K

S-TUBE-II

COLOR TEMP.	POWER	LUMENS	CODE
3000K	2 x 4 W	2 x 315 lm	EXT05108-30K
4000K		2 x 340 lm	EXT05108-40K
3000K	2 x 8 W	2 x 625 lm	EXT05110-30K
4000K		2 x 680 lm	EXT05110-40K

B-TUBE

p.241



100-240 Vac	IP65	IK08	CRI >80/>95	CREE COB CXA2520 (20 W / 30 W)

24º 36º 60º

STAINLESS STEEL 316L MIRROR FINISH

3000K 4000K 5000K

Features

B-TUBE

B-TUBE - I / II


Similar » CATEGORY



SAK S-TUBE B-TUBE SILL ALTER HUBI




B-TUBE 316L SS
MIRROR FINISH
(OPTIONAL)






B-TUBE-I 316L SS
MIRROR FINISH
(OPTIONAL)





B-TUBE-II 316L SS
MIRROR FINISH
(OPTIONAL)



B-TUBE

COLOR TEMP.	POWER	LUMENS	CODE
3000K	20 W	1758 lm	EXT05115-30K
4000K		1820 lm	EXT05115-40K
3000K	30 W	2638 lm	EXT05117-30K
4000K		2730 lm	EXT05117-40K

B-TUBE-I


COLOR TEMP.	POWER	LUMENS	CODE
3000K	20 W	1758 lm	EXT05119-30K
4000K		1820 lm	EXT05119-40K
3000K	30 W	2638 lm	EXT05121-30K
4000K		2730 lm	EXT05121-40K

B-TUBE-II

COLOR TEMP.	POWER	LUMENS	CODE
3000K	2 x 20 W	2 x 1758 lm	EXT05123-30K
4000K		2 x 1820 lm	EXT05123-40K
3000K	2 x 30 W	2 x 2638 lm	EXT05125-30K
4000K		2 x 2730 lm	EXT05125-40K

SILL


p.242

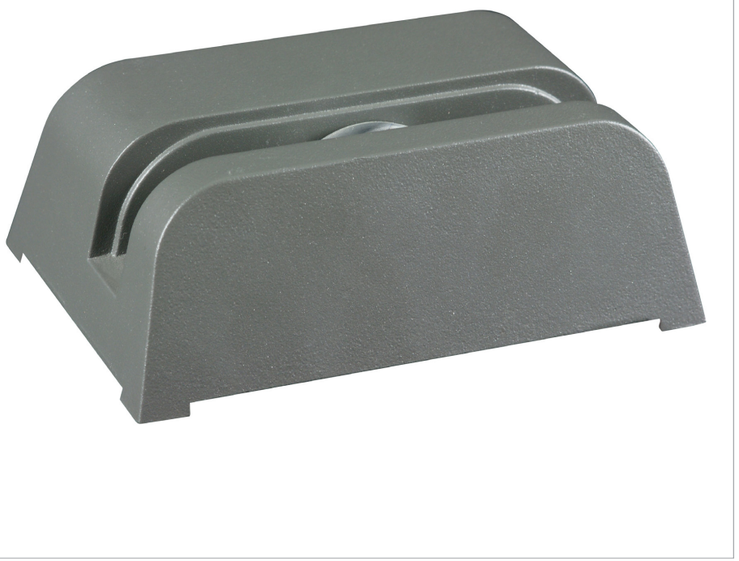

24Vdc | IP65 | IK06 | CRI >80 | PF >0.9 | CREE LED


5°x150°

RGBW
Color



3000K 4000K 5000K

Features



SILL

220-240 Vac
Inbuilt Driver

COLOR TEMP.	LED QTY.	POWER	LUMENS	CODE
3000K	3 pcs.	10 W	720 lm	EXT05141-30K
4000K			750 lm	EXT05141-40K
6000K			800 lm	EXT05141-60K

SILL RGBW

24Vdc
Remote Driver

COLOR TEMP.	LED QTY.	POWER	LUMENS	CODE
RGBW	3 pcs.	10 W	-	EXT05144-RGBW

Similar CATEGORY



SAK | S-TUBE | B-TUBE | SILL | ALTER | HUBI

ALTER

p.243



2700K 3000K 4000K 6000K

Features



ALTER 6 ALTER 12 ALTER 18

Similar » CATEGORY



SAK S-TUBE B-TUBE SILL ALTER HUBI

220-240 Vac | IP65 | CRI >80 | ADC12 ALU | LUMILEDS LED






White





Grey



Black







ALTER 6

COLOR TEMP.	POWER	LUMENS	CODE
2700K	2 x 3 W	2 x 105 lm	EXT05070-27K
3000K		2 x 130 lm	EXT05070-30K
4000K		2 x 169 lm	EXT05070-40K

ALTER 12

COLOR TEMP.	POWER	LUMENS	CODE
2700K	2 x 6 W	2 x 236 lm	EXT05074-27K
3000K		2 x 295 lm	EXT05074-30K
4000K		2 x 363 lm	EXT05074-40K

ALTER 18

COLOR TEMP.	POWER	LUMENS	CODE
2700K	2 x 9 W	2 x 400 lm	EXT05077-27K
3000K		2 x 460 lm	EXT05077-30K
4000K		2 x 520 lm	EXT05077-40K

HUBI

p.244




100-240 Vac	IP65	IK06	CRI >80/>95	CREE XP-E LED


120°



HUBI - II B
EXT06358
(OPTIONAL)



HUBI - II C
EXT06361
(OPTIONAL)



HUBI-II A

COLOR TEMP.	POWER	LUMENS	CODE
3000K	15 W	1200 lm	EXT06085-30K
4000K		1275 lm	EXT06085-40K
5000K		1300 lm	EXT06085-50K

3000K 4000K 5000K

Features



HUBI - II A



HUBI - Em (12W / 18W)
EXT06087 / EXT06088
Integrated Emergency Model
(OPTIONAL)

Emergency
4W @3hrs.

IK10

Similar CATEGORY



SAK | S-TUBE | B-TUBE | SILL | ALTER | HUBI

LED GUIDE 2023

SWITCH MADE LED SOLUTIONS

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY


OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING

www.switch-made.com



SEAL-X



RECTA



DECK



ROCK



CARA


- SEAL-X 135 FIXED / ADJUSTABLE 
- SEAL-X 160 FIXED / ADJUSTABLE 
- SEAL-X 182 FIXED / ADJUSTABLE 
- SEAL-X 208 FIXED / ADJUSTABLE 


SEAL-X FEATURES

p.246


Innovative recessed luminaire for floor/ground and ceiling installation, fixed, single adjustable versions for different applications, lighting head can be mechanically adjusted without opening the luminaire, high level of flexibility in terms of lighting control, very low glare rating with the deep recessed lighting head, die-casting aluminum body, 316L SS outer trim, 8mm thick tampered glass, very low thermal build-up at the diffuser end, integrated driver, optional versions available with frosted diffuser and 24Vdc models.



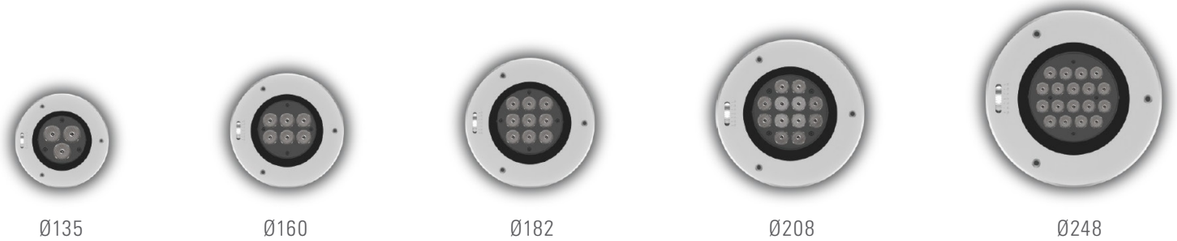

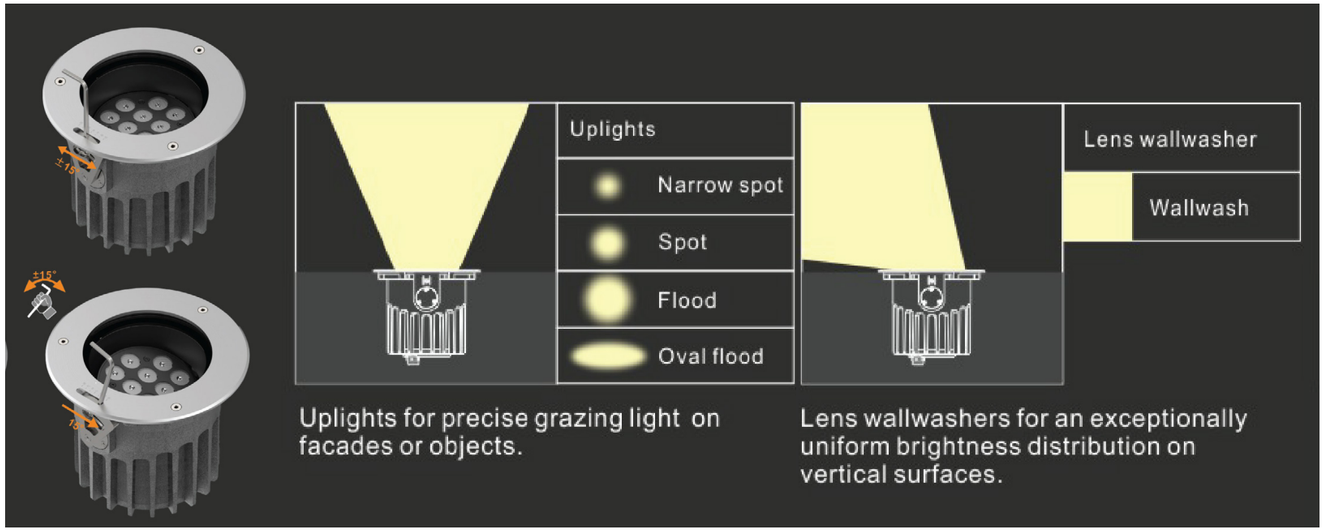

OPTIONAL ACCESORIES

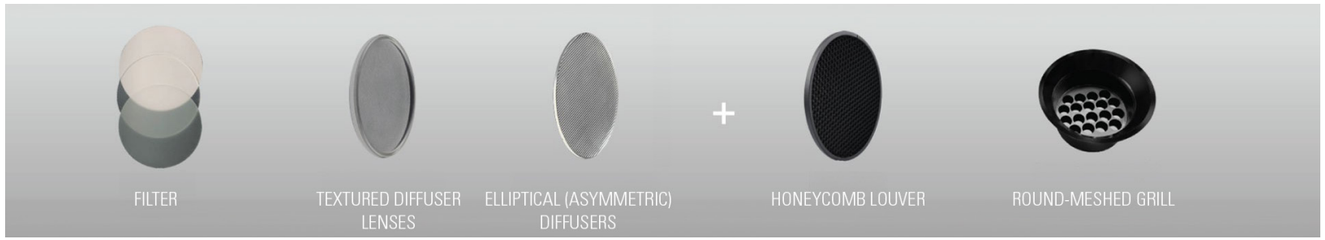

SEAL-X 135 / 160


p.247

SWITCH MADE LED SOLUTIONS




Finish: Stainless Steel

220-240 Vac	IP67	IK09	CRI >80	CREE SMD LED	316 STAINLESS STEEL	DALI / 0-10V TRIAC DMX 512 ON/OFF




BEAM ANGLE: MONO COLOR




BEAM ANGLE: RGB/RGBW



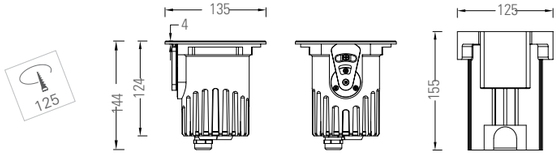

SEAL-X 135 FIXED / ADJUSTABLE

COLOR TEMP.	POWER	LUMENS	CODE
2700K	12 W	710 lm	EXT19151-FXD EXT19151-ADJ
3000K		742 lm	
4000K		780 lm	
RGB (3in1) / RGBW (4in1)		150 lm (average)	



SEAL-X 160 FIXED / ADJUSTABLE

COLOR TEMP.	POWER	LUMENS	CODE
2700K	18 W	1360 lm	EXT19151-FXD EXT19151-ADJ
3000K		1440 lm	
4000K		1500 lm	
RGB (3in1) / RGBW (4in1)		655 lm (average)	

Features



SEAL-X 135 FIXED | SEAL-X 135 ADJUSTABLE | SEAL-X 160 FIXED | SEAL-X 160 ADJUSTABLE

RGB/RGBW: Remote Driver | Mono-color: Inbuilt/Remote Driver | Also available in asymetric beam angle

(OPTIONAL)

SEAL-X 135 ADJUSTABLE (9W)
SEAL-X 135 FIXED (9W)

(OPTIONAL)

SEAL-X 160 ADJUSTABLE (15W)
SEAL-X 160 FIXED (15W)

Similar PRODUCTS



SEAL-X 135 / 160 | SEAL-X 182 / 208

SEAL-X 182 / 208

p.248

SWITCH MADE LED SOLUTIONS



Finish: Stainless Steel

	220-240 Vac	IP67	IK09	CRI >80	CREE SMD LED	316 STAINLESS STEEL	DALI / 0-10V TRIAC DMX 512 ON/OFF


5° 10° 20° 40° 60°

BEAM ANGLE: MONO COLOR

25° 40° 60°

BEAM ANGLE: RGB/RGBW


RGB RGBW

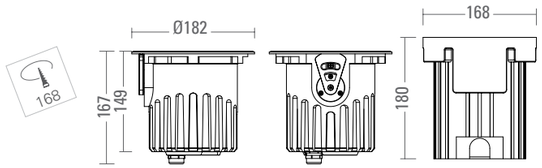

SEAL-X 182 FIXED / ADJUSTABLE

COLOR TEMP.	POWER	LUMENS	CODE
2700K	24 W	1890 lm	EXT19155-FXD EXT19155-ADJ
3000K		1920 lm	
4000K		1950 lm	
RGB (3in1) / RGBW (4in1)		1250 lm (average)	

RGB/RGBW: Remote Driver | Mono-color: Inbuilt/Remote Driver | Also available in asymetric beam angle



SEAL-X 208 FIXED / ADJUSTABLE

COLOR TEMP.	POWER	LUMENS	CODE
2700K	36 W	2700 lm	EXT19157-FXD EXT19157-ADJ
3000K		2765 lm	
4000K		2880 lm	
RGB (3in1) / RGBW (4in1)		1490 lm (average)	

RGB: Remote Driver | RGBW/Mono-color: Inbuilt/Remote Driver | Also available in asymetric beam angle

Features


SEAL-X 182 FIXED


SEAL-X 182 ADJUSTABLE


SEAL-X 208 FIXED


SEAL-X 208 ADJUSTABLE

Similar PRODUCTS


SEAL-X 135 / 160 SEAL-X 182 / 208

(OPTIONAL)

SEAL-X 182 ADJUSTABLE (30W)
SEAL-X 182 FIXED (30W)

(OPTIONAL)

SEAL-X 248 ADJUSTABLE (42W / 54W)
SEAL-X 248 FIXED (42W / 54W)

NOA UW

p.249

SWITCH MADE LED SOLUTIONS



220-240 Vac	IP67	IK09	CRI >80	CREE SMD LED	316 STAINLESS STEEL	DALI / 0-10V TRIAC DMX 512 ON/OFF

5° 10° 20° 40° 60°


BEAM ANGLE: MONO COLOR


25° 40° 60°


BEAM ANGLE: RGB/RGBW


RGB RGBW

Finish: Stainless Steel

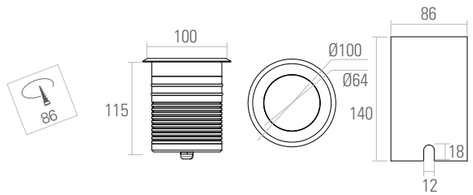

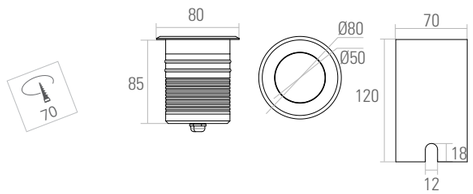

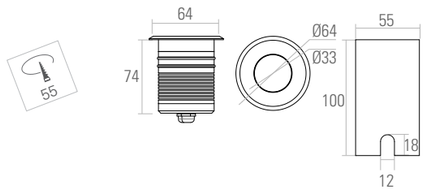

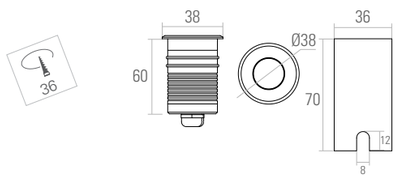

NOA UW 100

COLOR TEMP.	POWER	LUMENS	CODE
2700K	10W	1890 lm	-
3000K		1920 lm	
4000K		1950 lm	

NOA UW 80

COLOR TEMP.	POWER	LUMENS	CODE
2700K	7W	1890 lm	-
3000K		1920 lm	
4000K		1950 lm	

NOA UW 64

COLOR TEMP.	POWER	LUMENS	CODE
2700K	3W	2700 lm	-
3000K		2765 lm	
4000K		2880 lm	

NOA UW 38

COLOR TEMP.	POWER	LUMENS	CODE
2700K	1.5W	2700 lm	-
3000K		2765 lm	
4000K		2880 lm	

Features



NOA UW 100 | NOA UW 64 | NOA UW 38 | NOA UW 80 OPTIONAL

Similar PRODUCTS



SEAL-X 135 / 160 | SEAL-X 182 / 208

INDOOR


- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL


- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING



SEAL-X



RECTA



DECK



ROCK



CARA

RECTA 300	
RECTA 500	
RECTA 1000	

www.switch-made.com

RECTA


p.251


SWITCH MADE LED SOLUTIONS




2700K 3000K 4000K 5000K

100-240 Vac	24Vdc (RGB Optional)	IP67	IK10	RGB (Optional)	CREE LED XP-E2	304 STAINLESS STEEL









RECTA 300

COLOR TEMP.	LED QTY.	POWER	LUMENS	CODE
2700K	6 pcs.	7 W	455 lm	EXT02102-27K
3000K			490 lm	EXT02102-30K
4000K			525 lm	EXT02102-40K

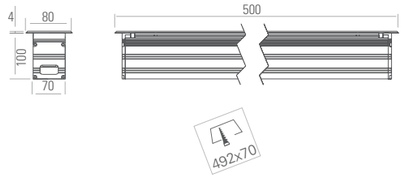

RECTA 500

COLOR TEMP.	LED QTY.	POWER	LUMENS	CODE
2700K	9 pcs.	11 W	715 lm	EXT02105-27K
3000K			770 lm	EXT02105-30K
4000K			825 lm	EXT02105-40K

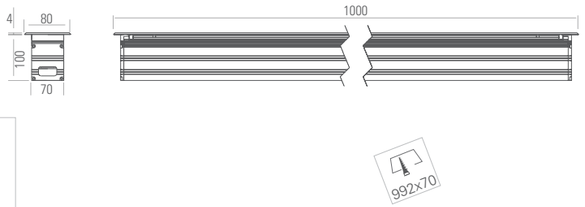

RECTA 1000


COLOR TEMP.	LED QTY.	POWER	LUMENS	CODE
2700K	18 pcs.	21 W	1365 lm	EXT02108-27K
3000K			1470 lm	EXT02108-30K
4000K			1575 lm	EXT02108-40K

Features



RECTA 300 RECTA 500 RECTA 1000

Similar PRODUCTS



SEAL RECTA DECK ROCK CARA

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING



SEAL-X



RECTA



DECK



ROCK



CARA

- DECK 1 
- DECK 3 
- DECK 7 
- DECK 13 

www.switch-made.com

DECK

p.253




2700K 3000K 4000K

Features



DECK 1 DECK 3 DECK 7 DECK 13

Similar PRODUCTS



SEAL RECTA DECK ROCK CARA


350mA | IP67 | IK09 | CRI >85 | LUMILEDS / CITIZEN LED CHIP | **24Vdc Model** (Optional) | **350mA CC** Remote Driver

DECK 1



COLOR TEMP.	POWER	LUMENS	CODE
2700K	1 W	50 lm	EXT02230-27K
3000K		68 lm	EXT02230-30K
4000K		76 lm	EXT02230-40K

DECK 3




COLOR TEMP.	POWER	LUMENS	CODE
2700K	3 W	175 lm	EXT02233-27K
3000K		186 lm	EXT02233-30K
4000K		195 lm	EXT02233-40K

DECK 7



COLOR TEMP.	POWER	LUMENS	CODE
2700K	7 W	441 lm	EXT02236-27K
3000K		469 lm	EXT02236-30K
4000K		490 lm	EXT02236-40K

DECK 13

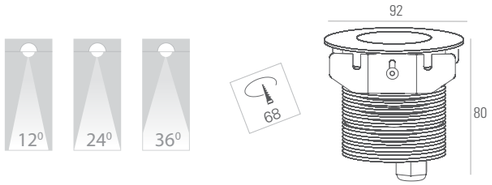

COLOR TEMP.	POWER	LUMENS	CODE
2700K	13 W	832 lm	EXT02239-27K
3000K		871 lm	EXT02239-30K
4000K		910 lm	EXT02239-40K

LED GUIDE 2023

SWITCH MADE LED SOLUTIONS

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL


- WEATHERPROOF
- HIGHBAY

OUTDOOR


- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING



SEAL-X



RECTA



DECK



ROCK



CARA

- ROCK 48
- ROCK 60
- ROCK 80
- ROCK 100


www.switch-made.com


ROCK 60


p.255

SWITCH MADE LED SOLUTIONS

IP67 | IK10 | CRI80 | CREE LED | 220-240Vac 50/60Hz | OPTIONAL REMOTE DRIVER | 0-10 DALI TRIAC | 304 STAINLESS STEEL



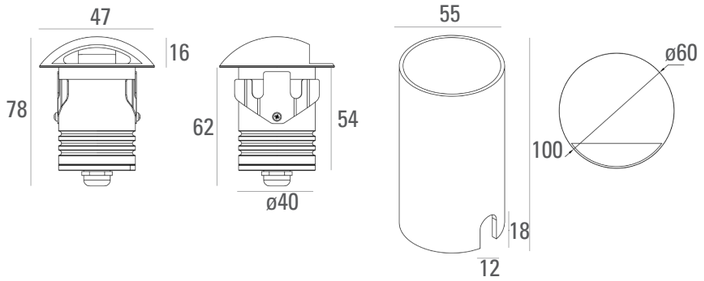

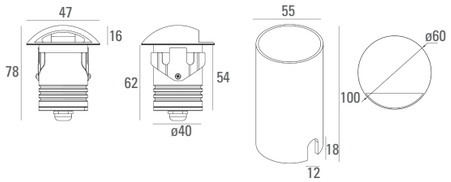

2700K 3000K 4000K 5000K 6000K

Features



ROCK 60

ROCK 60-I

COLOR TEMP.	POWER	LUMENS	CODE
3000K	5 W	75 lm	EXT19081-30K
4000K		100 lm	EXT19081-40K


ROCK 60-II

COLOR TEMP.	POWER	LUMENS	CODE
3000K	5 W	145 lm	EXT19082-30K
4000K		165 lm	EXT19082-40K

ROCK 60-IV

COLOR TEMP.	POWER	LUMENS	CODE
3000K	5 W	225 lm	EXT19083-30K
4000K		250 lm	EXT19083-40K

Similar PRODUCTS



SEAL | RECTA | DECK | ROCK | CARA

(OPTIONAL)



ROCK 48-I 1W EXT19078
ROCK 48-II 1W EXT19079
ROCK 48-IV 1W EXT19080



ROCK 80-I 7W EXT19084
ROCK 80-II 7W EXT19085
ROCK 80-IV 7W EXT19086



ROCK 100-I 10W EXT19087
ROCK 100-II 10W EXT19088
ROCK 100-IV 10W EXT19089

LED GUIDE 2023

SWITCH MADE LED SOLUTIONS

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL


- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING



SEAL-X



RECTA



DECK



ROCK



CARA

- CARA 5
- CARA 10
- CARA 20
- CARA 30

www.switch-made.com


CARA


p.257



Finish: Stainless Steel


220-240 Vac	IP67	IK08	CREE LED	304 STAINLESS STEEL





CARA 5

COLOR TEMP.	POWER	LUMENS	CODE
3000K	5 W	403 lm	EXT02084-30K
4000K		425 lm	EXT02084-40K
6000K		480 lm	EXT02084-60K



CARA 10

COLOR TEMP.	POWER	LUMENS	CODE
3000K	10 W	806 lm	EXT02088-30K
4000K		850 lm	EXT02088-40K
6000K		960 lm	EXT02088-60K

Features


CARA 5


CARA 10

Similar PRODUCTS


CARA 5


CARA 10


CARA 20



CARA 30

CARA

p.258



220-240 Vac | IP67 | IK08 | CREE LED | 304 STAINLESS STEEL



2700K 3000K 4000K 5000K 6000K

Features




CARA 20 CARA 30

Similar PRODUCTS




CARA 5 CARA 10 CARA 20 CARA 30



CARA 20

COLOR TEMP.	POWER	LUMENS	CODE
3000K	20 W	1600 lm	EXT02094-30K
4000K		1700 lm	EXT02094-40K
6000K		1880 lm	EXT02094-60K



CARA 30

COLOR TEMP.	POWER	LUMENS	CODE
3000K	30 W	2400 lm	EXT02182-30K
4000K		2550 lm	EXT02182-40K
6000K		2670 lm	EXT02182-60K

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING



BOLLARDS



POLE LIGHTING

- VENTI-1 
- VENTI-2 
- VENTI-2T 
- NEWK 
- ORB 
- URBIA 
- BOBI 

www.switch-made.com

VENTI

p.260



3000K 4000K 5000K

Features


VENTI - 1


VENTI - 2


SS FINISH


Similar PRODUCTS



VENTI | VENTI-2T | NEWK | ORB | URBIA | BOBI

100-240 Vac | IP65 | IK06 | CRI >80 | CREE LED CXA1512 (15 W) | CREE LED CXA2520 (20 W)

STAINLESS STEEL 316L MIRROR FINISH





VENTI-1 316L SS
MIRROR FINISH
EXT13101-15W
EXT13101-20W
(OPTIONAL)



VENTI 1

COLOR TEMP.	POWER	LUMENS	CODE
3000K	15 W	567 lm	EXT13101-30K
4000K		680 lm	EXT13101-40K
3000K	20 W	980 lm	EXT13102-30K
4000K		1100 lm	EXT13102-40K



VENTI-2 316L SS
MIRROR FINISH
EXT13105-15W
EXT13106-20W
(OPTIONAL)



VENTI 2


COLOR TEMP.	POWER	LUMENS	CODE
3000K	15 W	567 lm	EXT13105-30K
4000K		680 lm	EXT13105-40K
3000K	20 W	980 lm	EXT13106-30K
4000K		1100 lm	EXT13106-30K


VENTI-2T

p.261



100-240 Vac | IP65 | IK08 | CRI >80 | SMD LED





3000K 4000K

Features



VENTI 2T

COLOR TEMP.	POWER	LUMENS	CODE
3000K	15 W	990 lm	EXT12080-30K
4000K		1050 lm	EXT12080-40K

Similar PRODUCTS




VENTI | VENTI-2T | NEWK | ORB | URBIA | BOBI


NEWK


p.262



100-277 Vac | IP65 | IK08 | CRI >80 | PF >0.9







3000K 4000K 5000K

Features



NEWK-600 NEWK-900

NEWK 600

COLOR TEMP.	POWER	LUMENS	CODE
3000K	10 W	700 lm	EXT13141-30K
4000K		760 lm	EXT13141-40K

NEWK 900

COLOR TEMP.	POWER	LUMENS	CODE
3000K	10 W	700 lm	EXT13142-30K
4000K		760 lm	EXT13142-40K

Similar PRODUCTS



VENTI | VENTI-2T | NEWK | ORB | URBIA | BOBI


ORB

p.263

SWITCH MADE LED SOLUTIONS



	220-240 Vac	IP65	IK08	CRI >80	CREE LED CXA2520	



2700K 3000K 4000K 5000K 6500K

ORB 10W

COLOR TEMP.	POWER	LUMENS	CODE
3000K	2 x 5 W	700 lm	EXT19025-30K
4000K		750 lm	EXT19025-40K
6000K		800 lm	EXT19025-60K

Features



ORB

Similar PRODUCTS




VENTI | VENTI-2T | NEWK | ORB | URBIA | BOBI

URBIA

p.264



220-240 Vac | IP65 | IK08 | CRI >80 | CREE LED CXA2520



URBIA

COLOR TEMP.	POWER	LUMENS	CODE
3000K	5 W	425 lm	EXT19024-30K
4000K		440 lm	EXT19024-40K

2700K 3000K 4000K 5000K 6500K

Features



URBIA


Similar PRODUCTS



VENTI | VENTI-2T | NEWK | ORB | URBIA | BOBI

BOBI

p.265



220-240 Vac | IP65 | IK08 | PF >0.9 | CRI >80







3000K 4000K 5000K

Features



BOBI

Similar PRODUCTS



VENTI | VENTI-2T | NEWK | ORB | URBIA | BOBI

BOBI 15 L600

LENGTH	COLOR TEMP.	POWER	LUMENS	CODE
L600	3000 K	1 x 15 W	1 x 930 lm	EXT19022-30K
	4000 K	1 x 15 W	1 x 985 lm	EXT19022-40K

BOBI 15 L900

LENGTH	COLOR TEMP.	POWER	LUMENS	CODE
L900	3000 K	1 x 15 W	1 x 930 lm	EXT19061-30K
	4000 K	1 x 15 W	1 x 985 lm	EXT19061-40K

BOBI 30 L600

LENGTH	COLOR TEMP.	POWER	LUMENS	CODE
L600	3000 K	2 x 15 W	2 x 930 lm	EXT19062-30K
	4000 K	2 x 15 W	2 x 985 lm	EXT19062-40K

BOBI 30 L900

LENGTH	COLOR TEMP.	POWER	LUMENS	CODE
L900	3000 K	2 x 15 W	2 x 930 lm	EXT19063-30K
	4000 K	2 x 15 W	2 x 985 lm	EXT19063-40K

INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING



BOLLARDS



POLE LIGHTING

- KAIDO P1 
- KAIDO P2 
- KAIDO P3 
- UMBER 
- ORIK 
- FLOPY 
- SHERKO 
- URBO 

www.switch-made.com

KAIDO FEATURES

p.267

New innovative KAIDO family with modularity in choice of design and application, high-quality outdoor post-top lighting fixture, high efficiency and comfort uniform lighting distribution, <3 SDCM, precise and elegant illumination, high visual comfort, elegant form factor, self-cleaning, smooth surface, compact and ultra-thin die-cast aluminium body, clips design tool-free to open the housings, different types of mounting options, optional control modes, integrated driver, power-off protector, safe for maintenance, optional power model of 24W and 78W, designed for installation heights of 2.5m to 6.0m, delivered with 0.5m cable.



KAIDO POLE TOP 1



KAIDO POLE TOP 2



KAIDO POLE TOP 3



KAIDO LOW BAY




KAIDO CATENARY



KAIDO WALL MOUNTED

Beam Options

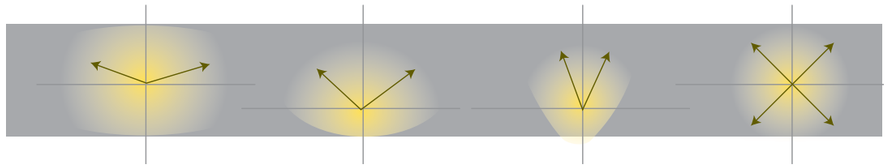

Type II Type III Type IV Type V

KAIDO

p.268



100-277 Vac | IP66 | IK09 | CRI >70/>80 | 130 lm/W | CREE LED | **DIMMABLE 1-10V / DALI** Optional

Timer Control | **Photocell** Control | **Motion** Sensor | **ZigBee** Wireless Control


Optional


2700K 3000K 4000K 5000K 5700K


Features



KAIDO P1 KAIDO P2 KAIDO P3







KAIDO P1

COLOR TEMP.	POWER	LUMENS	CODE
3000K	35 W	4375 lm	EXT13121-30K
4000K		4550 lm	EXT13121-40K
3000K	58 W	7540 lm	EXT13123-30K
4000K		7830 lm	EXT13123-40K

KAIDO P2

COLOR TEMP.	POWER	LUMENS	CODE
3000K	35 W	4375 lm	EXT13125-30K
4000K		4550 lm	EXT13125-40K
3000K	58 W	7540 lm	EXT13127-30K
4000K		7830 lm	EXT13127-40K

KAIDO P3

COLOR TEMP.	POWER	LUMENS	CODE
3000K	35 W	4375 lm	EXT13129-30K
4000K		4550 lm	EXT13129-40K
3000K	58 W	7540 lm	EXT13131-30K
4000K		7830 lm	EXT13131-30K

Similar PRODUCTS



KAIDO | UMBER | ORIK | FLOPY | SHERKO | URBO


UMBER

p.269



	100-277 Vac	IP66	IK09	CRI >70/>80	115 lm/W	CREE LED	**DIMMABLE 1-10V / DALI** Optional





Type V

Timer Control


Photocell Control

Motion Sensor

ZigBee Wireless Control

Optional

2700K 3000K 4000K 5000K 5700K



UMBER 35

COLOR TEMP.	POWER	LUMENS	CODE
3000K	35 W	3960 lm	EXT13133-30K
4000K		4140 lm	EXT13133-40K

UMBER 60

COLOR TEMP.	POWER	LUMENS	CODE
3000K	60 W	5985 lm	EXT13135-30K
4000K		6270 lm	EXT13135-40K

Features



Similar PRODUCTS



KAIDO | UMBER | ORIK | FLOPY | SHERKO | URBO


ORIK

p.270



100-277 Vac | IP65 | IK09 | CRI >70/>80 | 80 lm/W | CREE LED





3000K 4000K 6000K

Features



ORIK 20

COLOR TEMP.	POWER	LUMENS	CODE
3000K	20 W	1600 lm	EXT13137-30K
4000K		1785 lm	EXT13137-40K

ORIK 40

COLOR TEMP.	POWER	LUMENS	CODE
3000K	40 W	3200 lm	EXT13139-30K
4000K		3425 lm	EXT13139-40K

Similar PRODUCTS



KAIDO | UMBER | ORIK | FLOPY | SHERKO | URBO


FLOPY

p.271




100-240 Vac	IP55	IK07	PF >0.9	CRI >70





3000K 4000K 5000K 6000K

Features



FLOPY

COLOR TEMP.	POWER	LUMENS	CODE
3000K	30 W	2020 lm	EXT13024-30K
4000K		2200 lm	EXT13024-40K
6000K		2400 lm	EXT13024-60K

Similar PRODUCTS



KAIDO | UMBER | ORIK | FLOPY | SHERKO | URBO


SHERKO

p.272




Finish: White, Grey, Black

100-240 Vac	IP65	IK08	100 lm/W	CRI >70	BRIDGELUX SMDLED	PF >0.9	70°x120°	85°x140°




SHERKO 50

COLOR TEMP.	POWER	LUMENS	CODE
3000K	50 W	4500 lm	EXT13089-30K
4000K		4750 lm	EXT13089-40K
5000K		5000 lm	EXT13089-50K



SHERKO 100

COLOR TEMP.	POWER	LUMENS	CODE
3000K	100 W	9000 lm	EXT13086-30K
4000K		9500 lm	EXT13086-40K
5000K		10000 lm	EXT13086-50K



SHERKO 180

COLOR TEMP.	POWER	LUMENS	CODE
3000K	180 W	16200 lm	EXT13085-30K
4000K		17100 lm	EXT13085-40K
5000K		18000 lm	EXT13085-50K

Features



SHERKO 50 SHERKO 100 SHERKO 180

Similar PRODUCTS



KAIDO UMBER ORIK FLOPY SHERKO URBO



Aluminium Die-cast Body



Better Heat Dissipation

URBO

p.273




3000K 4000K 5000K


Features



100-240 Vac	IP66	IK08	130 lm/W	CRI >70/>80	NICHIA SMD LED	**DIMMABLE 1-10V / DALI** Optional



Optional



Timer Control

Photocell Control

Optional

URBO 70

COLOR TEMP.	POWER	LUMENS	CODE
3000K	70 W	8820 lm	EXT13044-30K
4000K		9100 lm	EXT13044-40K
5000K		9310 lm	EXT13044-50K

URBO 120

COLOR TEMP.	POWER	LUMENS	CODE
3000K	120 W	15120 lm	EXT13046-30K
4000K		15600 lm	EXT13046-40K
5000K		15960 lm	EXT13046-50K

URBO 150

COLOR TEMP.	POWER	LUMENS	CODE
3000K	150 W	18000 lm	EXT13057-30K
4000K		18750 lm	EXT13057-40K
5000K		19500 lm	EXT13057-50K

Similar PRODUCTS



KAIDO | UMBER | ORIK | FLOPY | SHERKO | URBO

INDOOR

INDUSTRIAL


OUTDOOR

LINEAR PROFILES


INTEGRATED DRIVER



EXTERNAL DRIVER



RECESSED



WARDROBE



STEP LIGHTING




IP67 PROFILES



IP67 PROFILES



NEONFLEX



LED MODULE



COMPONENTS

LED STRIPS



LED PCB



FLEX ROLL



DRIVERS



FRAMES

ROUND



SQUARE SOFT EDGE



DECONUT



DECORING



STAND ALONE

STANDY PIXEL



STANDY UNI



STANDY A / B



VICE VERSA

PIXEL LINE



VICE VERSA-PIXEL 1




VICE VERSA-PIXEL 2



VICE VERSA-PIXEL 3



VICE VERSA-WALL



PANELS

PALAOS PIXEL




PALAOS GRID



PALAOS TROFFER



PALAOS CLASSIC




PALAOS IP65



PALAOS DESIGN



PALAOS SURFACE MOUNTED



PALAOS CIRCULAR GYPSUM



PALAOS CIRCULAR 600



CEILING RECESSED ACCENTUATION

CELESTIA SS



CELESTIA SD



CELESTIA FP



CELESTIA SC



CEILING RECESSED ACCENTUATION

BLACKMOON



RESSY



SWAT

NEPTUNE -R

NEPTUNE -S

NEVUS

SHUTTLE

CHROME-R

CHROME-S

NICKEL-D

NICKEL MINI

NICKEL-W

PIXEL GRID

Next Page 1 2 3

INDOOR

INDUSTRIAL

OUTDOOR

CEILING RECESSED ADJUSTABLE

BLACKMOON-R ADJ.



BLACKMOON - II



MIG 1 - R



MIG 1 - S



MIG 2 - S




MIG 3 - S



MIRAGE 1 - R



MIRAGE 1 - S



MIRAGE 2 - S



MODUL 28-I



MODUL 28-II / III



SHUTTLE ADJ.



CEILING RECESSED WALLWASHER

ROTOR



CEILING RECESSED IP RATED

STILLA



PICOLO



IPIL



SWIMO



CEILING RECESSED GENERAL

ERA



AERO



POP



JUPY - X



CEILING MOUNTED GENERAL

CELESTIA SS



CELESTIA SD



CELESTIA ST



CELESTIA 100 FC



CEILING MOUNTED GENERAL

TRIO



ECLIPSE



BETA



ZETA



BLACKMOON




WALL RECESSED


IROUND-X



ISQUARE-X



MUIRA - R



MUIRA - S



PERLE



MARKI



CEILING & WALL MOUNTED

ZETA WALL MOUNTED



CEILING & WALL MOUNTED


IOTA



ALTER



SIGMA 1510



LINEA

SUSPENDED

CELESTIA

BLACKMOON

EPSILON

BETA SUSPENDED

ZETA SUSPENDED

CYLI

Next Page 1 2 3

TRACK LIGHT

48V TRACK



48V SUSPENDED



220V TRACK



BLACKMOON



ZOOM-X



PIXEL TRACK



BETA TRACK



ZETA TRACK



CIRCO-X



TRUNK SYSTEM

LINE MAX



Next Page 1 2 3

WEATHERPROOF

COMET - ALU



COMET PC - OPEN



COMET PC - SEALED



COMET PC - SLIM



HIGHBAY

THEOS



THEOS COMPACT



THEOS RACK



INDOOR

PROJECTORS

KALOU



CRUG



CANNON



POWO



KUBI



KIKEX



PIKI



LIGO



KOOKI



WALLWASHERS

TECK



PIXEL-X



LINY



WALLWASHERS

COVEX



CEILING RECESSED

STILLA



STRONG



SUSPENDED

CYLI




WALL RECESSED


IROUND - X



ISQUARE - X




MUIRA - R



MUIRA - S



PERLE



MARKI



RONDIX




CUBIX



INDUSTRIAL

WALL MOUNTED

SAK




S-TUBE



B-TUBE



SILL



ALTER



HUBI



GROUND RECESSED


SEAL-X



RECTA



DECK



ROCK



CARA



OUTDOOR

BOLLARDS

VENTI



NEWK




ORB



URBIA



BOBI



POLE LIGHTING

KAIDO P1

UMBER

ORIK

FLOPY

SHERKO

URBO

LED GUIDE 2023

INDEX

A

AERO 35
AERO 50
AERO 60
AERO 80
ALTER 12
ALTER 18
ALTER 6

B

BETA 15 CEILING MOUNTED
BETA 15 SUSPENDED
BETA 20 CEILING MOUNTED
BETA 20 SUSPENDED
BETA 20 TRACK
BETA 30 TRACK
BETA 8 CEILING MOUNTED
BLACKMOON 10
BLACKMOON 10-II
BLACKMOON 10 R CEILING MOUNTED
BLACKMOON 10 S CEILING MOUNTED
BLACKMOON 10 TRACK
BLACKMOON 10 II-S CEILING MOUNTED
BLACKMOON 10 SUSPENDED
BLACKMOON 10 R ADJ.
BLACKMOON 14
BLACKMOON 14-II
BLACKMOON 14 R CEILING MOUNTED
BLACKMOON 14 SUSPENDED
BLACKMOON 14 TRACK
BLACKMOON 14 R ADJ.
BLACKMOON 20
BLACKMOON 20 TRACK
BLACKMOON 20 SUSPENDED
BLACKMOON 28
BLACKMOON 3
BLACKMOON 8
BLACKMOON 8 R CEILING MOUNTED
BLACKMOON 8 S CEILING MOUNTED
BLACKMOON 8 SUSPENDED
BLACKMOON 8 TRACK
BLACKMOON 8 II-S CEILING MOUNTED
BOBI 15 L600
BOBI 15 L900
BOBI 30 L600
BOBI 30 L900
B-TUBE
B-TUBE-I
B-TUBE-II

C

CANNON 1
CANNON 1 RGBW
CANNON 3
CANNON 3 RGBW
CARA 10
CARA 20
CARA 30
CARA 5
CELESTIA 100 48V SUSPENDED
CELESTIA 100 FC SURFACE
CELESTIA 100 SC RECESSED
CELESTIA 100 SUSPENDED-A
CELESTIA 130 48V SUSPENDED
CELESTIA 130 FC SURFACE
CELESTIA 130 SC RECESSED
CELESTIA 130 SUSPENDED-A
CELESTIA 60 48V SUSPENDED
CELESTIA 60 48V TRACK
CELESTIA 60 FP RECESSED
CELESTIA 60 SD RECESSED
CELESTIA 60 SS RECESSED
CELESTIA 80 220V TRACK
CELESTIA 80 48V SUSPENDED
CELESTIA 80 48V TRACK
CELESTIA 80 FP RECESSED
CELESTIA 80 SD RECESSED
CELESTIA 80 SD SURFACE
CELESTIA 80 SS RECESSED
CELESTIA 80 SS SURFACE
CELESTIA 80 ST SURFACE
CELESTIA 80 SUSPENDED-A
CHROME 10 R
CHROME 10 S
CHROME 14 R
CHROME 14 S
CHROME 28 R
CHROME 28 S
CHROME 35 R
CHROME 8 R
CHROME 8 S
CIRCO-X 20
CIRCO-X 30
CIRCO-X 40
COMET-ALU 1500
COMET-ALU 1200
COMET-ALU 600
COMET PC-OPEN 1200
COMET PC-OPEN 1500
COMET PC-OPEN 600
COMET PC-SEALED 1200
COMET PC-SEALED 1500
COMET PC-SEALED 600
COMET PC-SLIM 1200
COMET PC-SLIM 1500
COMET PC-SLIM 600
COVEX 1200
COVEX 1800
COVEX 300
CRUG 16
CRUG 16 RGBW
CRUG 24 RGBW
CRUG 25
CRUG 4
CRUG 4 RGBW
CRUG 6
CRUG 6 RGBW
CRUG 9
CRUG 9 RGBW
CUBIX
CYLI-I 15W
CYLI-I 20W
CYLI-II 15W
CYLI-II 20W

D

DECK 1
DECK 13
DECK 3
DECK 7
DECONUT
DECORING
DRIVERS 24VDC
DRIVERS 24VDC-LINE

LED GUIDE 2023

INDEX

E

- ECLIPSE SURFACE MOUNTED
- ECLIPSE SUSPENDED
- EPSILON 15
- EPSILON 20
- EPSILON 30
- ERA 105
- ERA 136
- ERA 162
- ERA 84

F

- FLEX ROLL
- FLOPY

H

- HUBI-II A

I

- IOTA
- IPIL 10
- IPIL 15
- IPIL 20
- IROUND-X
- ISQUARE-X

J

- JUPY-X 10
- JUPY-X 22
- JUPY-X 30

K

- KAIDO P1
- KAIDO P2
- KAIDO P3
- KALOU 12
- KALOU 12 RGBW
- KALOU 18 RGBW (OPTIONAL)
- KALOU 180
- KALOU 180 RGBW
- KALOU 36
- KALOU 36 RGBW
- KALOU 40 RGBW (OPTIONAL)
- KALOU 80 RGBW (OPTIONAL)
- KALOU 90
- KALOU 90 RGBW
- KIKEX 4
- KIKEX 9
- KOOKI 10
- KOOKI 20
- KOOKI 30
- KOOKI 50
- KUBI 18
- KUBI 36
- KUBI 9

L

- LED MODULE 1
- LED MODULE 2
- LED MODULE 3
- LED PCB
- LED STRIPS 24VDC
- LIGO 1
- LIGO 3
- LIGO 7
- LINE C25100
- LINE E1212
- LINE E2507
- LINE E2513
- LINE E5535
- LINE E6935(F)
- LINE E9435
- LINE G1616C
- LINE G3030C(B)
- LINE IP0501
- LINE IP0503
- LINE MAX 1
- LINE MAX 2
- LINE S0709
- LINE S1607
- LINE S1613
- LINE S1911K(B)
- LINE S3360
- LINE S3535
- LINE S4067
- LINE S5470(F)
- LINE S7977
- LINE ST20
- LINE ST6528
- LINE T60
- LINE W3701
- LINEA 1200
- LINEA 600
- LINEA 900
- LINY 18
- LINY 24
- LINY 30

M

- MARKI
- MIG 1 R
- MIG 1 S
- MIG 2 S
- MIG 3 S
- MIRAGE 1-20 R
- MIRAGE 1-20 S
- MIRAGE 1-28 R
- MIRAGE 1-28 S
- MIRAGE 2-20 S
- MIRAGE 2-28 S
- MODUL 28-I
- MODUL 28-II
- MODUL 28-III
- MUIRA-R
- MUIRA-S

N

- NEONFLEX 0612
- NEONFLEX 1217
- NEONFLEX 1312
- NEONFLEX 1615
- NEPTUNE 10 R
- NEPTUNE 10 S
- NEPTUNE 8 R
- NEPTUNE 8 S
- NEVUS 75
- NEVUS 85
- NEWK 600
- NEWK 900
- NICKEL 10 - D
- NICKEL 10 - W

INDEX

N

NICKEL 10 MINI
NICKEL 8 - D
NICKEL 8 - W
NICKEL 8 MINI

O

ORB
ORIK - 20
ORIK - 40

P

PALAOS CIRCULAR 600 MOUNTED
PALAOS CIRCULAR 600 SUSPENDED
PALAOS CIRCULAR GYPSUM Ø170
PALAOS CIRCULAR GYPSUM Ø225
PALAOS CIRCULAR GYPSUM Ø300
PALAOS CLASSIC
PALAOS DESIGN FRAMELESS
PALAOS DESIGN NARROW FRAME
PALAOS GRID
PALAOS IP65
PALAOS PIXEL
PALAOS SURFACE MOUNTED ANGULAR
PALAOS SURFACE MOUNTED CIRCULAR
PALAOS TROFFER
PERLE
PICOLO 8 ADJUSTABLE
PICOLO 8 ROUND
PICOLO 8 SQUARE
PIKI 33
PIKI 42
PIKI 55
PIKI 69
PIKI 85
PIXEL-X
PIXEL GRID 1
PIXEL GRID 10
PIXEL GRID 15
PIXEL GRID 2
PIXEL GRID 5
PIXEL LINE
PIXEL TRACK
POP 15
POP 30
POP 40
POWO

R

RECTA 500
RECTA 1000
RECTA 300
RESSY
ROCK 60-I
ROCK 60-II
RONDIX
ROCK 60-IV
ROTOR 10
ROTOR 15
ROUND

S

SAK 40
SAK 70
SAK MINI 20
SAK MINI 30
SEAL-X 182 ADJUSTABLE
SEAL-X 182 FIXED
SEAL-X 208 ADJUSTABLE
SEAL-X 208 FIXED
SHERKO 100
SHERKO 180
SHERKO 50
SHUTTLE 12
SHUTTLE 12 ADJUSTABLE
SHUTTLE 20
SHUTTLE 20 ADJUSTABLE
SHUTTLE 30
SHUTTLE 30 ADJUSTABLE
SHUTTLE 40
SHUTTLE 40 ADJUSTABLE
SIGMA 1510
SIGMA 3010
SILL
SILL RGBW
SQUARE SOFT EDGE
STANDY PIXEL
STANDY UNI
STILLA 10
STILLA 2
STILLA 3
STILLA 7
STRONG 92
STRONG 123
S-TUBE
S-TUBE-I
S-TUBE-II
SWAT 3-1
SWAT 3-3
SWIMO 15
SWIMO 22
SWIMO 9

T

TECK 24
TECK 36
TECK 48
TECK 54
TECK 72
THEOS 100
THEOS 150
THEOS 200
THEOS 300
THEOS COMPACT 100
THEOS COMPACT 150
THEOS COMPACT 200
THEOS RACK 120
THEOS RACK 150
THEOS RACK 180
THEOS RACK 240
THEOS RACK 60
THEOS RACK 90
TRIO 12
TRIO 25
TRIO 30

U

UMBER 35
UMBER 60
URBIA
URBO 120
URBO 150

INDEX

URBO 70

V

VENTI 1
VENTI 2
VENTI 2T
VICE VERSA-PIXEL 1
VICE VERSA-PIXEL 2
VICE VERSA-PIXEL 3
VICE VERSA-WALL

Z

ZETA 20 CEILING MOUNTED
ZETA 20 SUSPENDED
ZETA 20 WALL MOUNTED
ZETA 20 TRACK
ZETA 30 CEILING MOUNTED
ZETA 30 SUSPENDED
ZETA 30 WALL MOUNTED
ZETA 30 TRACK
ZOOM-X 20
ZOOM-X 30



FRANCE
180 Allée des tropiques (Marcipark, 1er étage)
69380 Marcilly d'Azergues
Tel. +33 (0)7 86 68 15 66
Email. france@switch-made.com



UNITED ARAB EMIRATES
Aspect Tower, Office 3703
Business Bay, Dubai
P.O Box 390227
Tel. +971 (0)4 44 77 384
Fax. +971 (0)4 44 77 383
Email. info@switch-made.com



QATAR
Y Tower, St. 305
4th Floor, Office 403
Lusail, P.O. Box 22775
DOHA - QATAR
Tel. +974 5592 3206
Fax. +971 (0)4 44 77 383
Email. info@switch-made.com



SAUDI ARABIA
Riyadh
Tel. +971 (0)4 44 77 384
Fax. +971 (0)4 44 77 383
Email. info@switch-made.com



IVORY COAST
Abidjan-Marcory, Zone 4
30 BP 653 Abidjan 30
Cote d'Ivoire
Tel. +225 07 09 092 840
Email. info@switch-made.com

SWITCH MADE
LED SOLUTIONS

SWITCH MADE GROUP
info@switch-made.com
www.switch-made.com

SHOW MAP

LEDGUIDE-2022. JUNE 27, 2024

SWITCH MADE GROUP

■ Offices



INDOOR

- LINEAR PROFILES & SYSTEMS
- FRAMES & STAND ALONE
- CEILING RECESSED & MOUNTED
- WALL RECESSED & MOUNTED
- SUSPENDED - TRACK - TRUNK SYSTEM

INDUSTRIAL

- WEATHERPROOF
- HIGHBAY

OUTDOOR

- PROJECTORS
- WALLWASHERS
- CEILING RECESSED & SUSPENDED
- WALL RECESSED & MOUNTED
- GROUND RECESSED
- BOLLARDS & POLE LIGHTING